


7 Switch Settings, Adjustments and Indicators

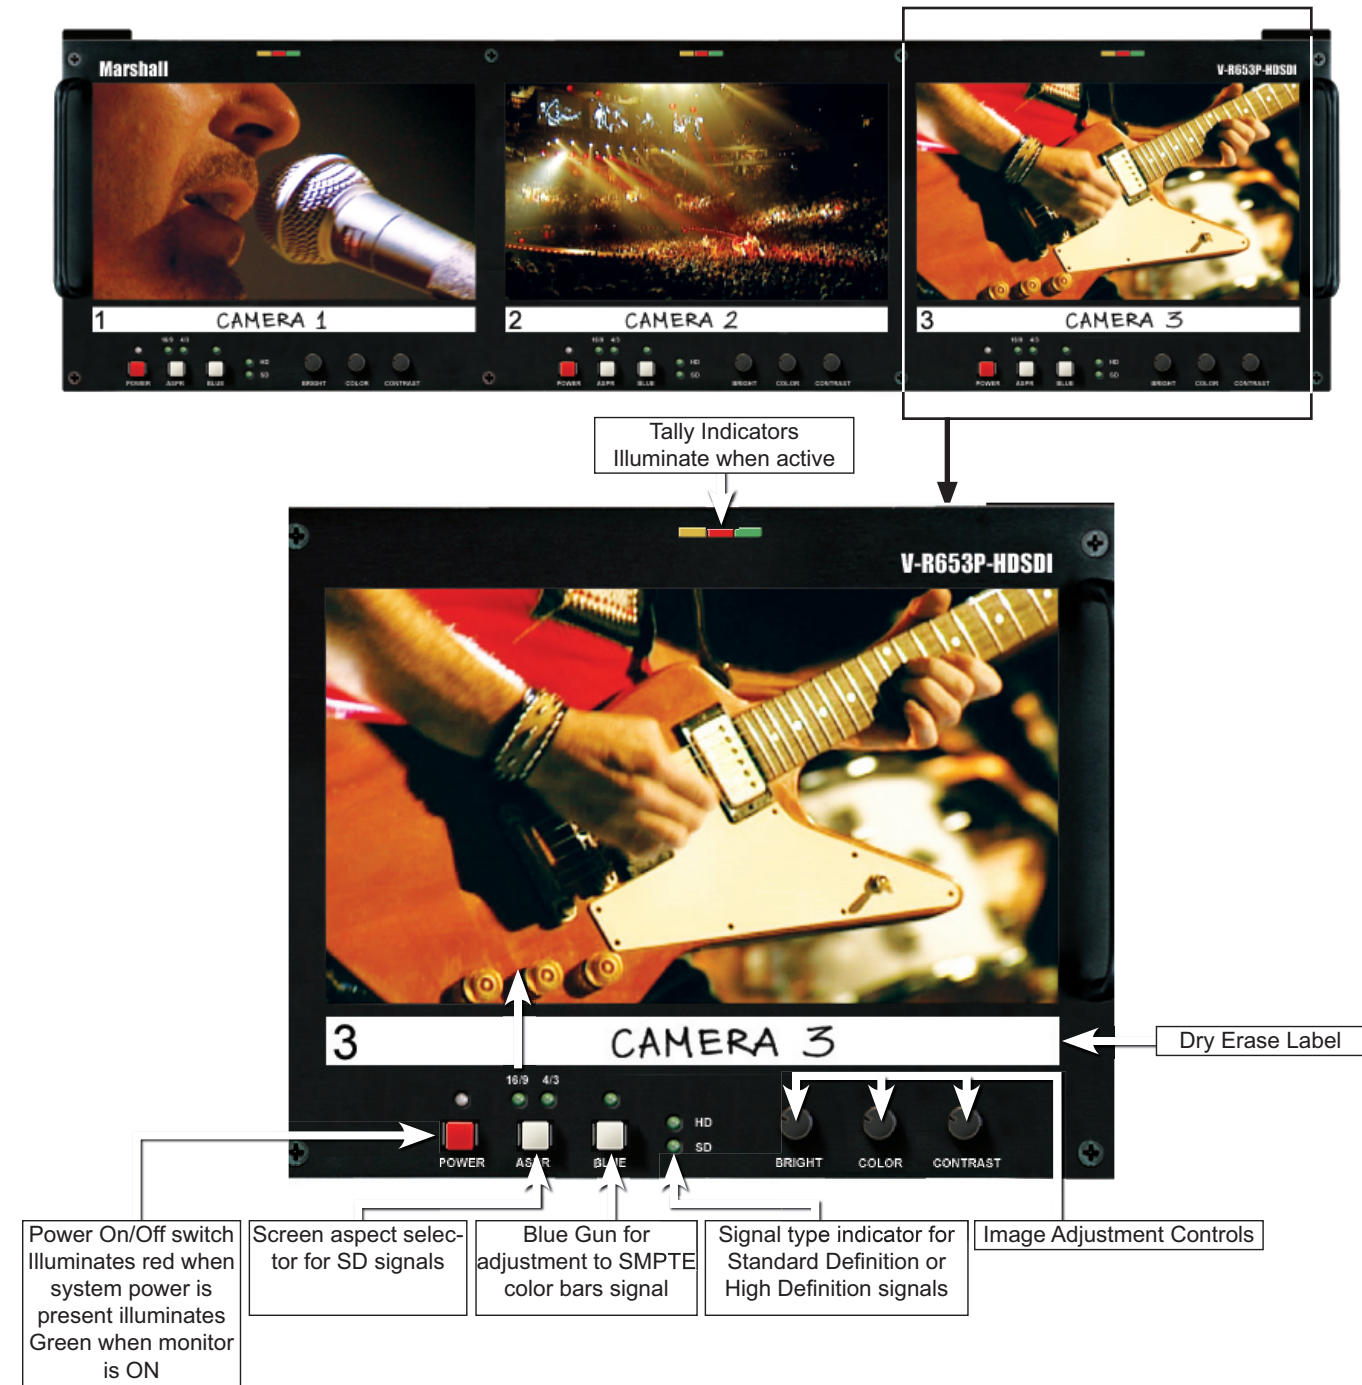

8 Warranty

Marshall Electronics warrants to the first consumer, that this V-R653P-HDSI Triple 6.5 inch LCD rack mounted monitor set will, under normal use, be free from defects in workmanship and materials, when received in its original container, for a period of one year from the purchase date. This warranty is extended to the purchasing end user only and proof of purchase is necessary to honor the warranty. If there is no proof of purchase provided with a warranty claim, Marshall Electronics reserves the right not to honor the warranty set forth above. Therefore, labor and parts may be charged to you.

This warranty does not apply to product exterior and cosmetics. Misuse, abnormal service or handling, improper alterations or modifications in design or construction, voids this warranty. No sales personnel of the seller, nor any other person is authorized to make any warranties other than those described above, or to extend the duration of any warranties on behalf of Marshall Electronics, beyond the time period described above.

An extra note about LCD displays: It is considered normal for a minimal amount of pixels, not to exceed three, to fail on the periphery of the display active viewing area. Marshall Electronics has the option to reserve service for display pixel failure if deemed unobtrusive to effective use of the monitor by our technicians.

Due to constant effort to improve products and product features, specifications may change without notice. Ver.2010-0216

Marshall Electronics

1910 East Maple Ave.
El Segundo, CA 90245
Tel.: 800-800-6608 • Fax: 310-333-0688
www.LCDRacks.com
Email: sales@lcdracks.com



V-R653P-HDSI Users Guide

Product Overview 1

Features 2

Electrical Specifications 3

Mechanical Specifications 4

Operational Setup 5

Connectors 6

Switch Settings, Adjustments and Indicators 7


Warranty 8

1 Product Overview

The Rack mounted and tiltable **V-R653P-HD** represents a technological revolution in LCD imaging for broadcast and professional video applications. The V-R653P-HD features three state of the art, High Resolution, 1.2 TFT-megapixel™ screens with completely digital signal processing. All SMPTE/ITU serial digital video standards and signal types are accepted and displayed on each screen of this model. All video formats are scaled to fit on screen in the highest resolution using a state of the art LSI that incorporates 4x4 pixel interpolations with precision Gamma correction to produce the best images available. Each screen is calibrated to SMPTE standards for Gamma and color temperature.

2 Features

- **3 High Resolution 6.5-inch 1.2 MegaPixel wide screens**
- **100% digital processing**
- **High resolution scaling of all images**
- **Wide viewing radius - 130° horizontal and 120° vertical provides superior visibility when the viewer is not directly in front of the screen**
- **500 candelas per square meter (cd/m2) luminance produces enhanced image quality in varying light and viewing conditions**
- **500:1 ratio of contrast between black and white luminance values with response rates less than 30 ms results in excellent quality for moving images**
- **4:3 and 16:9 screen aspect ratios for DTV applications in SD formats**
- **Works with all SMPTE/ITU SDI/HDSI production formats and frame rates**
- **Blue Gun for color adjustment**
- **SD/HD digital signal indicators**
- **Small Footprint – occupies only 3RU of a standard EIA 19 inch rack**
- **Ready to mount – all brackets are factory installed**
- **Lightweight - Save over 30 pounds when compared to similar CRT models**
- **All adjustments and selections are readily available. No menus!**
- **Easy to use front panel selection of inputs**
- **NTSC or Pal operation with automatic signal format detection**
- **All inputs automatically terminate**
- **Includes V-PS12-5V-1 Universal power supply (U.L. class 2)**
- **Unique front mount with tilt adjustment**
- **Dry erase label for each screen**

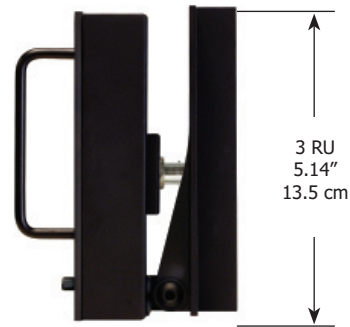

3 Electrical Specifications

Number of Screens	3
Display (Viewing Area)	6.5" Diagonal (16.4cm), (5.67"H x 3.08"V) (144.0mm x 78.24mm)
Viewing Angles	130°H x 120° V
Resolution (Dots)	800H x RGB x 480V (1.2 million pixels)
Dot Pitch	0.06 mm (W) x 0.163mm (H)
Contrast Ratio	500:1
Pixel Response	<30ms
Brightness (in cd/m²)	500 cd/m²
System	NTSC/PAL auto recognition for standard definition signals
Inputs per display	HDSI/SDI with re-clocked output (BNC)

4 Mechanical Specifications

Dimensions	19.12"W x 5.14"H x 2.5"D (48.6cm x 130.5cm x 63.5cm)
V-R653P-HDSI Weight	6.0 lbs
Power Consumption	12VDC/36 watts. – (5.5 Amps max - UL Class 2 supply included)


5 Operational Setup

1. Unpack the V-R653P-HDSI and accompanying V-PS12-5V-1 power supply. Physically inspect for any damage that may have occurred during shipping. Should there be any damage, immediately contact Marshall Electronics at 800-800-6608. If you are not located within the continental United States call +1 310-333-0606.
2. After inspection, install in your desired location of a standard EIA 19-inch equipment rack. Adequate ventilation is required when installed to prevent possible damage to the V-R653P-HDSI internal components.
3. Connect required cables for signal input and output. Please note that power must be applied to the V-R653P-HDSI for all outputs to be activated. All BNC connectors should be rated for 75Ω.
4. Plug the V-PS12-5V-1 power supply into the A.C. source
5. Attach twist lock power connection from V-PS12-5V-1 power supply to the back of the unit.
6. Turn on the V-R653P-HDSI by depressing the power switch located on the front of the unit.

6 Connectors

* HDSI/SDI inputs comply to SMPTE259M / ITU-R BT601

* All Outputs Require Power to be applied for activation

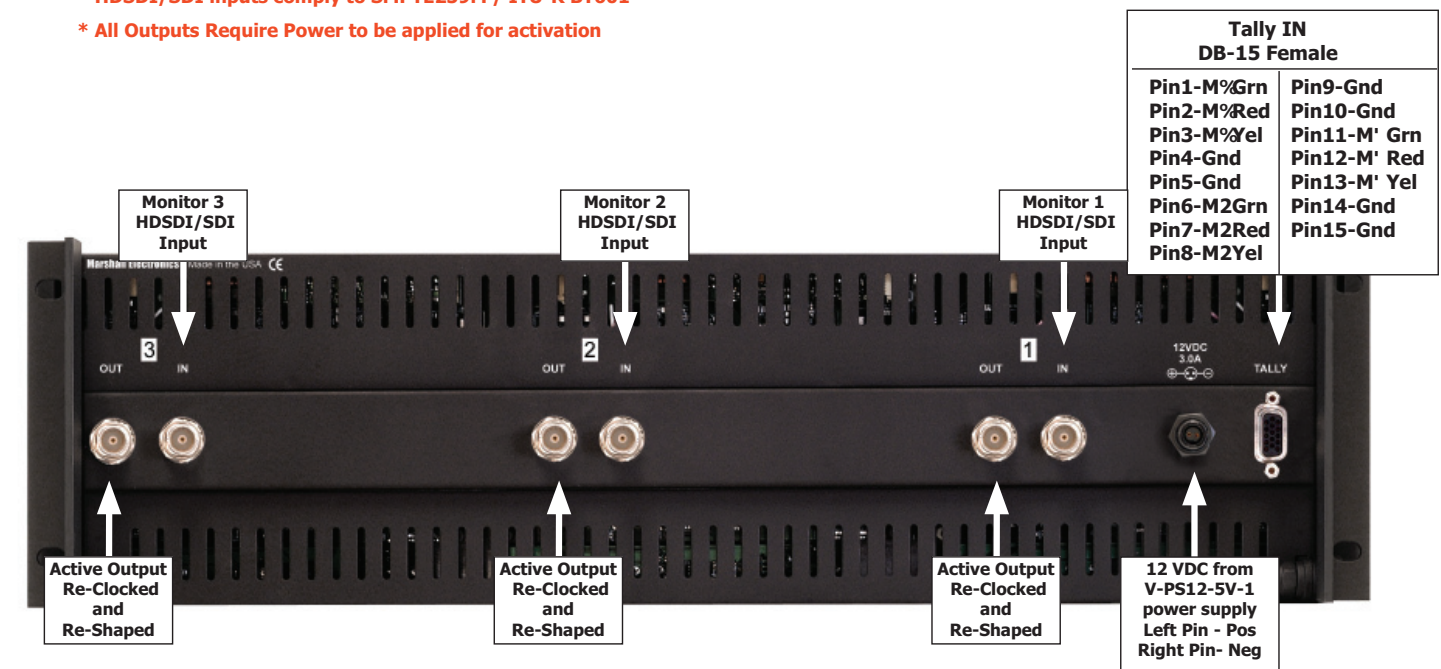

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>