

NEWAIR Small Dehumidifier

INSTRUCTION MANUAL

Model No.: ADS-400

FEATURES

The mini dehumidifier uses Peltier technology (no compressor), which makes it light and quiet. It is perfect for small rooms. Poor ventilation causes musty odour and fungus in wardrobes, larder, cabinet or storage room...etc. The mini dehumidifier eliminates this problem by keeping them free of unwanted moisture.

- ★ To avoid electric shock. Do not open. There are no user serviceable parts inside.
- ★ Any repair work must be done by qualified technician appointed by our distributors
- ★ Specifications are subject to change for improvement without prior notice.

SPECIFICATIONS

Capacity 10 oz per day at 86°F, 80% RH
 Cooling element . . . thermo-electric Peltier module
 Fan 3.2 X 3.2 inch DC Brushless motor
 Power adaptor . . . 12 V DC 3A mp
 Power consumption . . 36 W
 Removable water tank : 32 oz
 Water Level Detector : Automatic switch off with "Yellow" LED Indicator when water tank is full

Working environment . . Over 59°F, over 40% RH

CONNECTION

1. After removing the packaging materials, there should be 2 items:
 - a. mini dehumidifier
 - b. AC/DC Power adaptor
2. Plug the DC power jack of AC / DC power adaptor to the DC power socket, then connect the AC plug of the AC / DC power adaptor to the appropriate main socket
3. Press the " On / Off " button to " On " position, the mini dehumidifier will begin to operate. The green LED will be turned on. Listen and feel for the air blowing from dry air outlet.
4. To switch off the unit, press " On / Off " button to " Off " position, the mini dehumidifier will be turned off

REMOVABLE WATER TANK

When the water tank is full, with approximately 32 oz of water collected, the unit will be switched off automatically and the " Yellow " LED will be on.


To remove the water tank, first switch off the mini dehumidifier, press " On / Off " button to the " Off " position. Then, remove the water tank from the unit and pour the water out to the toilet or bathroom. Put the water tank back into the unit. To continue dehumidifying, press the " On / Off " button to " On " position again.

CLEANING

Before cleaning the unit, turn off the mini dehumidifier and unplug the AC plug from the main socket first. Use a piece of soft cloth to clean the surface of the product or use a brush to wipe the dust off the grills of the air inlet.

CAUTIONS

1. After having finished using the mini dehumidifier, the user should switch the unit off by pressing the " On / Off " button to " Off " position.
2. Avoid using the AC / DC power adaptor in wet or damp place, and position it in areas where the air ventilation is good.
3. Keep the front inlet grill and the top outlet free from air blocking materials such as clothing, plastic bag or papers.
4. If the unit has been properly connected and no power is flowing, have the AC / DC power adaptor and the dehumidifier unit checked by a qualified electrician.
5. Always keep the unit at an up-right position to avoid water leakage.

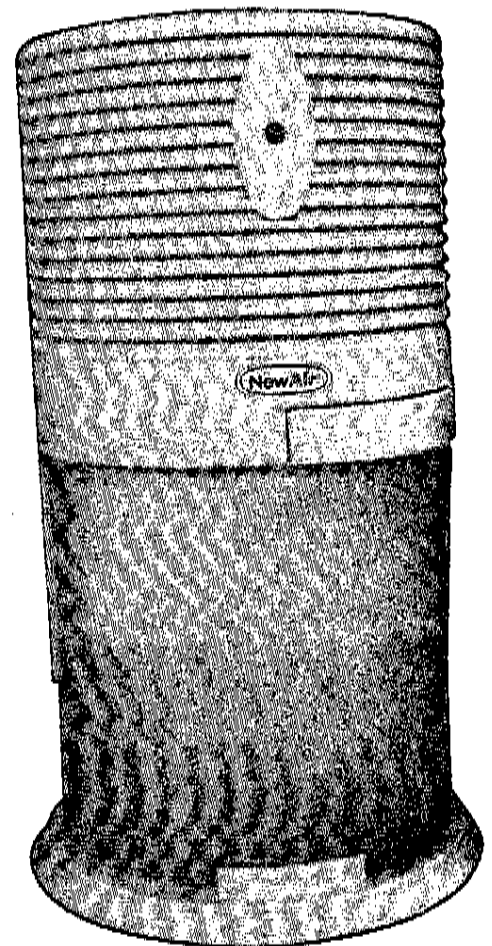

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>