

General Description

The e 835 S is a cardioid lead vocal stage microphone specially designed to perform under pressure.





Technical Data

Pick-up pattern	cardioid
Frequency response	40 – 16,000 Hz
Sensitivity (free field, no load, 1 kHz)	2.7 mV/Pa
Nominal impedance	350 Ω
Min. terminating impedance	1 kΩ
Dimensions	∅ 48 x 180 mm
Weight	330 g

Features

- Rugged metal body
- Excellent feedback rejection
- High sound pressure handling capability
- Shock-mounted capsule provides excellent suppression of handling noise
- Uniform on- and off-axis response
- Cardioid pick-up pattern provides isolation from other on-stage signals
- Hum compensating coil
- Delivery includes: 1 e 835
 - 1 microphone clip
 - 1 pouch

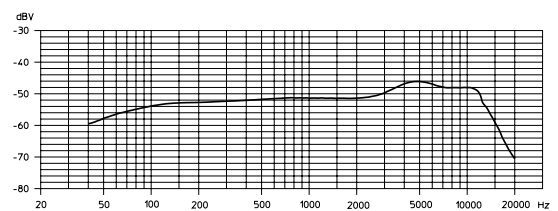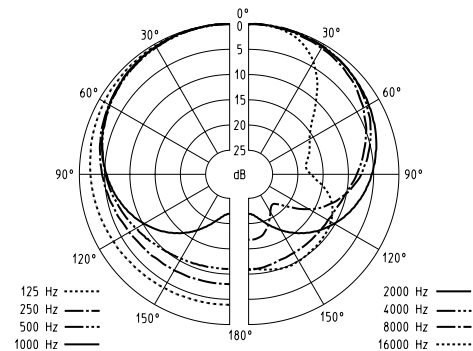

Profile

Cardioid vocal microphone, hum compensating coil, frequency response 40 Hz – 16 kHz, sensitivity (free field, no load) 2.7 mV/Pa at 1 kHz, nominal impedance 350 Ω, min. terminating impedance 1 kΩ, dimensions ∅ 48 x 180 mm, weight 330 g.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>