

# COOPER LIGHTING - SURE-LITES®

Catalog #	Type
Project	
Comments	
Prepared by	Date

## SPECIFICATION FEATURES – EMERGENCY POWER PACK

### Description

Standard Emergency Power Pack for converting AC Only Incandescent or Fluorescent Steel Exits to Self Powered Emergency Exits (DC Lamp Kit included).

### Electronic

Dual Voltage Input  
120/277 VAC, 60Hz  
Line-latching  
Solid-state Voltage Limited Charger  
Solid-state Switching  
Low Voltage Disconnect  
Brownout Circuit  
Overload/Short Circuit Protection  
Test Switch/Power Indicator Light  
May be specified with Self-Diagnostics Option (use "SD" suffix)

### Housing

22 gauge steel housing, Recombination  
Choice of two finishes

### Battery


Sealed Lead Calcium  
Maintenance Free, Long life  
Full Recharge Time, 24 hrs. (max.)  
Polarized Battery Terminals

### Warranty

Power Pack – 1 year  
Battery – 5 year pro-rata

### Lamps

Two 6V, 3.6W DC wedge base lamps included

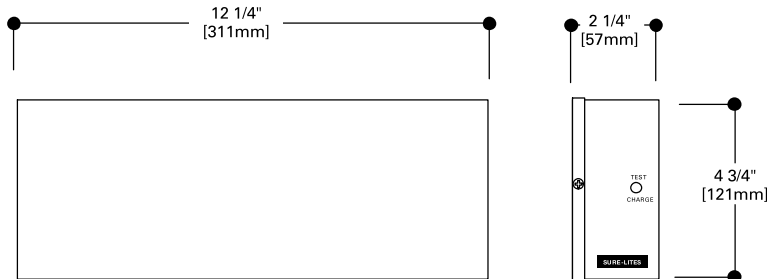

## EMERGENCY POWER PACK & DC LAMPS

R/G/CX/OF/PLX SERIES  
FIELD INSTALLED ACCESSORIES  
Exit Lighting

## SPECIFICATION FEATURES – DC LAMP KIT

### Description

Lamp Kit for converting AC Only Steel Exits to Emergency Exits (DC power source also required)

### Electrical

6V or 12V DC Lamps

### Construction

Lamp brackets snap into position  
Choice of 6V, 3.6W or 12V, 3.6W DC wedge base lamps

## ORDERING INFORMATION

### Emergency Power Pack (Rated Wattage to 87 1/2% of Rated D.C. Voltage)

Catalog Number	Color	1 1/2 Hours	2 Hours	Comments
EPX5000P	White	10.8	7.2	When used with PLX Series Steel Exits, one additional DC lamp is required (Total: 3 lamps) – Order DCE6 or DCE63
EPX5000B	Black	10.8	7.2	

Note: Emergency Power Packs may be specified with Self-Diagnostics Option (use "SD" suffix)

### DC Lamp Kit

Catalog Number	Volts	Lamp Wattage	No. of Lamps	For use with
DCE6	6	3.6	2	Incandescent Steel Exits
DCE12	12	3.6	2	Incandescent Steel Exits
DCE63	6	3.6	3	EAX, PLX Series Exits
DCE123	12	3.6	3	EAX, PLX Series Exits



### ENERGY DATA

EPX5000P, EPX5000B

See appropriate Self-Powered Steel Exit Specification Sheet with lamp type of exit fixture being converted.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>