


SHAPER™

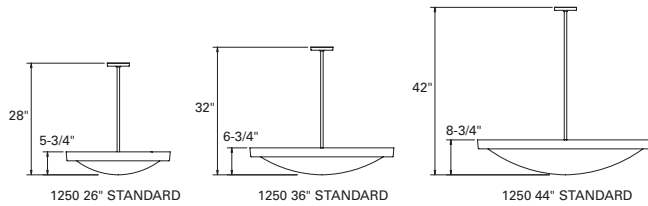

Sample Number: 1250-26-CFL/3/27 + T5/1/22-120V-SC-FF-28

Series	Size	Lamp	Lamp (Bowl)	Voltage
Series 1250	26"	CFL/3/27 ^{1,2}	CFL/4/50 ³	T5/1/22 ^{1,2} 120V
	36"	CFL/3/32 ^{1,2}	CFL/4/55 ³	T5/1/40 ³ 277V
	44"	CFL/3/39 ²	CFL/4/57 ³	CFL/8/55 ³ 347V
		CFL/3/40 ²	CFL/4/70 ³	HAL/3/150 ^{1,2}
		CFL/3/42 ^{1,2}	CFL/6/27 ^{1,2}	HAL/4/150 ³
		CFL/3/50 ²	CFL/6/39 ²	MH/3/35
		CFL/3/55 ²	CFL/6/40 ²	MH/3/39 ^{1,2}
		CFL/3/57 ²	CFL/6/50 ²	MH/3/70 ^{1,2}
		CFL/3/70 ²	CFL/6/55 ²	MH/3/150 ²
		CFL/4/27 ³	CFL/8/27 ³	MH/4/70 ³
		CFL/4/39 ³	CFL/8/39 ³	MH/4/150 ³
		CFL/4/40 ³		

1250-ATR, STR & 3R SERIES

The 1250 Direct/Indirect High Performance Luminous Pendant can be specified without trim or with Acrylic Trim Rings (ATR), Solid Metal Trim Rings (STR) or Three Floating Rods (3R) and is available in three diameters with multiple mounting options.

Finish	Pattern ⁵	Stem and Canopy Finish ⁵	Options	Suspension Height
Standard - MW	COL = Coral	Standard - MW	1SAC DL	28" (OA) - 26" dia.
Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCL, SCP, SN, SNL	SHL = Seashell SMT = Smooth	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCP, SN	3S DM ⁶ QP FF SJCAC REM SJVWAC SCA TP ^{1,2} SSW GTR ^{1,2} FB	32" (OA) - 36" dia. 42" (OA) - 44" dia. Or Specify
Custom Decorative Metals CLR, CBT, SPE, SGE, BRS, CPR, BPL, SGN, CMP, CLE, IDO, RBE, PWR				

Notes:
1. Available in 26".
2. Available in 36".
3. Available in 44".
4. Available in 26" Only.
5. Available with Custom Decorative Metal Finish only.
6. Not available in 27W.

MATERIAL

Painted and plated cold rolled steel or natural aluminum pan with a matte white acrylic bowl. Acrylic Trim Rings (ATR) or optional Glass Trim Rings.

INSTALLATION

Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided. Refer to specification sheet for additional mounting requirements.


LAMP/SOCKET

26" - Three (3) or six (6) 27W (2G11) high lumen CFL lamps, three (3) 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple CFL lamps, or three (3) 39W or 70W T6 CDM metal halide lamps, or three (3) T4 (DC Bay) clear linear halogen lamps. One (1) 22W (2GX13) T5 circular lamp (bowl illumination).
36" - Three (3) or six (6) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps, three (3) 32W (GX24q-3), 42W (GX24q-4) 4-pin triple or 57W (GX24q-5) or 70W (GX24q-6) 4-pin triple HO CFL lamps or three (3) 35W or 70W T4 39W, 70W or 150W T6 CDM metal halide lamps or three (3) 150W T4 (DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination).
44" - Four (4) or eight (8) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps, four (4) 57W (GX24q-5) or 70W (GX24q-6) 4-pin triple HO CFL lamps or four (4) 70W or 150W T6 CDM metal halide lamps, or four (4) 150W T4 (DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination).

BALLAST

Integral CFL electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage. Metal Halide ballast is electronic HPF, multi-volt (120V/277V) for the specified lamp wattage. 347V MH ballast - Contact factory.

FINISH AND OPTIONS
See page 1020 for finish details and options.

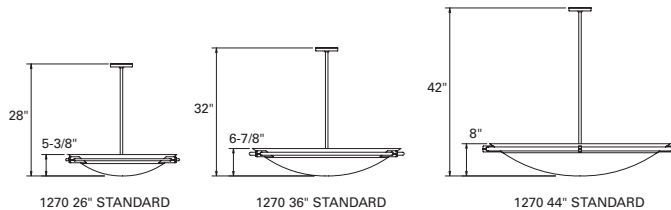

Sample Number: 1270-36-CFL/3/39-120V-SAL-DM-32

Series	Size	Lamp	Voltage	Finish
Series 1270	26"	CFL/3/27 ^{1,2}	120V	Standard - MW
	36"	CFL/3/39 ²	277V	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCL, SCP, SN, SNL
	44"	CFL/3/40 ²	347V	Custom Decorative Metals CLR, CBT, SPE, SGE, BRS, CPR, BPL, SGN, CMP, CLE, IDO, RBE, PWR
		CFL/3/50 ²	CFL/6/50 ²	
		CFL/3/55 ²	CFL/6/55 ²	
		CFL/4/27 ³	CFL/8/27 ³	
		CFL/4/39 ³	CFL/8/39 ³	
		CFL/4/40 ³	CFL/8/40 ³	
		CFL/4/50 ³	CFL/8/50 ³	
		CFL/4/55 ³	CFL/8/55 ³	

1270 SERIES

The 1270 Indirect High Performance Pendant features a shallow solid bowl with a floating trim and is available in three diameters with multiple mounting options.

MATERIAL

Painted and plated cold rolled steel or natural aluminum pan. Supplied with a single stem assembly.

BALLAST

Integral CFL electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION

Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided. Refer to specification sheet for additional mounting requirements.

LAMP/SOCKET

26" - Three (3) or six (6) 27W (2G11) high lumen CFL lamps.
36" - Three (3) or six (6) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps.
44" - Four (4) or (8) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps. CFL socket injection molded plastic. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.

Pattern ⁵	Stem and Canopy Finish ⁵	Options	Suspension Height
COL = Coral	Standard - MW	1SAC	28" (OA) - 26" dia.
SHL = Seashell	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCL, SCP, SN	3S	32" (OA) - 36" dia.
SMT = Smooth		QP ³	42" (OA) - 44" dia.
RIP = Ripples		SJCAC	Or Specify
KLP = Kelp		SJVWAC	
WVS = Waves		TP ^{1,2}	
WTR = Waterfall		DL	
		DM ⁶	
		FF	
		REM	
		SCA	
		SSW	

Notes:
1. Available in 26".
2. Available in 36".
3. Available in 44".
4. Available in 26" Only.
5. Available with Custom Decorative Metal Finish only.
6. Not available in 27W.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>