



DIMENSIONS

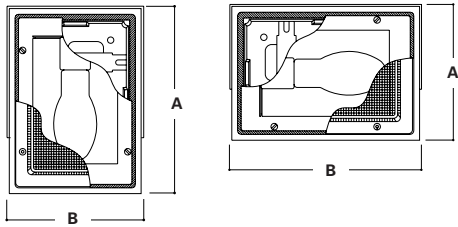

MOUNTING

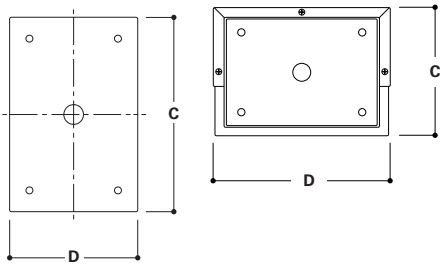

	A	B	C	D
HVH	6 5/8" (168mm)	9 3/8" (238mm)	5 3/8" (137mm)	8" (203mm)
HVV	9 1/4" (235mm)	6 3/4" (171mm)	8" (203mm)	5 3/8" (137mm)

DESCRIPTION

Fail-Safe designed its HVH and HVV Series as unbreakable, low wattage alternatives to the destruction suffered by many of the commercial market's low mounted, easily accessed exterior lighting fixtures. Double gaskets and one-piece construction of both the UV stabilized polycarbonate refractor and corrosion resistant cast aluminum housing, enable these luminaires to survive where other fixtures cannot. Mounts to vertical or horizontal surfaces. Available with horizontal mounting (HVH) and vertical mounting (HVV). U.L. listed, C.S.A. certified, standard wet label.



HVH
HVV

35W - 70W

High Pressure Sodium

50W

Metal Halide

**CAST ALUMINUM
SURFACE LUMINAIRE**

ORDERING INFORMATION

SAMPLE NUMBER: HVA-70S-120-OPL

Product Family HV=Cast Aluminum Surface Luminaire	Series H=Horizontal Mounting V=Vertical Mounting	Lamp Type 35S=35W HPS Medium Base 50S=50W HPS Medium Base 70S=70W HPS Medium Base 50M=50W MH Medium Base	Voltage ¹ 120=120V 277=277V	Options GLR=Single Fuse HPF=Capacitor for High Power Factor OPL=Opal Diffuser Housing Finishes Blank=Bronze (Standard) BLK=Black WHT=White	Accessories (Order Separately) 9205=Photocell 120V 9210=Photocell 277V VRSD=Torxhead Vandal Resistant Screwdriver
--	--	---	---	---	---

- Nominal .156 UV stabilized, injection molded, impact resistant, clear K12 prismatic polycarbonate refractor
- Captive, stainless steel tamperproof TORX®-head screws prevent unauthorized access
- Heavy duty, corrosion resistant cast aluminum housing withstands impact and environmental abuse. Standard bronze polyester powder coat finish
- Lamps by others
- Porcelain socket, copper screwshell, silicone braid, 150°C
- Non-shrinking, double baked neoprene gasketing seals out the environment
- NPF reactor ballast
- 18 ga. CRS plug-in power tray for quick disconnection of electrical assembly eases maintenance
- U.L. Listed, C.S.A. certified, standard wet label

Notes: For additional options, consult your Cooper Lighting Representative. Specifications and Dimensions subject to change without notice.

¹ Products also available in non-US voltages and 50Hz for international markets. Consult your Cooper Lighting Representative for availability and ordering information.

Download from Www.Somanuals.com. All Manuals Search And Download.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>