



Air Conditioning & Heating

**COOLING CAPACITY:**  
**24,000 TO 57,000 BTU/H**

# SSX16

**HIGH-EFFICIENCY, 2- TO 5-TON  
SPLIT SYSTEM AIR CONDITIONER  
UP TO 16 SEER**

### Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- High-quality compressor sound blanket
- High-pressure switch; low-pressure switch
- Factory-installed filter drier
- 850 RPM condenser fan motor
- Copper tube/enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

### Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side compressor and tubing access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



### Contents

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	4
AHRI Ratings.....	22
Wiring Diagrams .....	54
Dimensions .....	56
Accessories .....	56



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

NOMENCLATURE

	S	S	X	16	036	1	A	A		
	1	2	3	4,5	6,7,8	9	10	11		
<b>Brand</b>	G Goodman® (Standard Feature Set Models)		S Goodman® (High Feature Set Models)							<b>Engineering *</b> Minor Revision
<b>Product Category</b>	S Split System							<b>Engineering *</b> Major Revision		
<b>Unit Type</b>	C Condenser R-22		X Condenser R-410A		H Heat Pump R-22		Z Heat Pump R-410A			
<b>Efficiency</b>	13 13 SEER		14 14 SEER		16 16 SEER					
							<b>Electrical</b>			
							1 208/230 V, 1 Phase, 60 Hz			
							2 220/240 V, 1 Phase, 50 Hz			
							3 208/230 V, 3 Phase, 60 Hz			
							4 460 V, 3 Phase, 60 Hz			
							5 380/415 V, 3 Phase, 50 Hz			
							<b>Nominal Capacity</b>			
							018 1½ Tons			
							024 2 Tons			
							030 2½ Tons			
							036 3 Tons			
							042 3½ Tons			
							048 4 Tons			
							060 5 Tons			
							090 7½ tons			
							120 10 Tons			

\* Neither used for order entry or inventory management.



**SPECIFICATIONS**

	<b>SSX16 0241B*</b>	<b>SSX16 0301A*</b>	<b>SSX16 0361B*</b>	<b>SSX16 0421A*</b>	<b>SSX16 0481B*</b>	<b>SSX16 0591A*</b>
<b>COOLING CAPACITY</b>						
Nominal Cooling (BTU/h)	24,000	30,000	36,000	42,000	48,000	60,000
Decibels	73.5	73.5	73.5	75	74	73.5
<b>COMPRESSOR</b>						
RLA	13.5	12.8	14.1	16.7	19.9	25.0
LRA	58.3	64	77	79	109	134
Condenser Fan Motor						
Horsepower (RPM)	1/6	1/6	1/6	1/4	1/4	1/4
FLA	1.10	1.10	1.10	1.50	1.50	1.50
<b>REFRIGERATION SYSTEM</b>						
Refrigerant Line Size <sup>1</sup>						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	sweat	Sweat	Sweat
Refrigerant Charge	97	96	102	109	138	251
<b>ELECTRICAL DATA</b>						
Voltage-Phase	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity <sup>2</sup>	18.0	17.1	18.7	22.4	26.4	32.8
Max. Overcurrent Protection <sup>3</sup>	30	25	30	35	45	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
<b>EQUIPMENT WEIGHT (LBS)</b>	175	182	164	182	282	284
<b>SHIP WEIGHT (LBS)</b>	193	200	182	200	304	306

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — SSX160241B\* / CA\*F3636\*6\*\*\* +TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
		65°F					75°F					85°F					95°F					105°F					115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
70	900	22.9	23.8	26.0	-	22.4	23.2	25.4	-	21.9	22.7	24.8	-	21.3	22.1	24.2	-	20.3	21.0	23.0	-	18.8	19.5	21.3	-	20.3	21.0	23.0	-	18.8	19.5	21.3	-	17	15	11	-	17	15	11	-	16	14	11	-	17	15	11	-	16	14	11	-	1.8	1.5	1.6	-	1.7	1.7	1.8	-	1.8	1.8	1.9	-	1.8	1.9	1.9	-	1.8	1.8	1.9	-	1.8	1.9	1.9	-	1.9	1.9	2.0	-	6.5	5.7	5.8	-	6.0	6.1	6.3	-	6.5	6.6	6.9	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-	310	334	352	-	272	293	309	-	310	334	352	-	310	334	352	-	349	375	396	-	385	415	438	-	310	334	352	-	272	293	309	-	310	334	352	-	310	334	352	-	349	375	396	-	385	415	438	-	119	127	139	-	114	121	132	-	119	127	139	-	119	127	139	-	125	133	145	-	129	138	150	-	119	127	139	-	114	121	132	-	119	127	139	-	119	127	139	-	125	133	145	-	129	138	150	-	20.7	21.5	23.5	-	21.2	22.0	24.1	-	20.7	21.5	23.5	-	20.7	21.5	23.5	-	19.7	20.4	22.3	-	18.2	18.9	20.7	-	20.7	21.5	23.5	-	21.2	22.0	24.1	-	20.7	21.5	23.5	-	20.7	21.5	23.5	-	19.7	20.4	22.3	-	18.2	18.9	20.7	-	0.8	0.7	0.6	0.4	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.6	0.4	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	1.8	1.5	1.6	-	1.6	1.6	1.7	-	1.7	1.7	1.8	-	1.8	1.8	1.8	-	1.8	1.9	1.9	-	1.8	1.9	1.9	-	1.8	1.5	1.6	-	1.6	1.6	1.7	-	1.7	1.7	1.8	-	1.8	1.8	1.8	-	1.8	1.9	1.9	-	1.8	1.9	1.9	-	6.9	7.0	7.3	-	6.4	6.6	6.8	-	6.4	6.6	6.8	-	6.9	7.0	7.3	-	7.3	7.5	7.7	-	7.3	7.5	7.7	-	6.9	7.0	7.3	-	6.4	6.6	6.8	-	6.4	6.6	6.8	-	6.9	7.0	7.3	-	7.3	7.5	7.7	-	7.3	7.5	7.7	-	307	330	349	-	270	290	306	-	307	330	349	-	307	330	349	-	345	372	392	-	382	411	434	-	307	330	349	-	270	290	306	-	307	330	349	-	307	330	349	-	345	372	392	-	382	411	434	-	118	126	137	-	112	120	131	-	118	126	137	-	118	126	137	-	124	132	144	-	128	136	149	-	118	126	137	-	112	120	131	-	118	126	137	-	118	126	137	-	124	132	144	-	128	136	149	-	19.1	19.8	21.7	-	19.6	20.3	22.2	-	19.1	19.8	21.7	-	19.1	19.8	21.7	-	18.2	18.8	20.6	-	16.8	17.4	19.1	-	19.1	19.8	21.7	-	19.6	20.3	22.2	-	19.1	19.8	21.7	-	19.1	19.8	21.7	-	18.2	18.8	20.6	-	16.8	17.4	19.1	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	19	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	1.6	1.5	1.5	-	1.6	1.6	1.6	-	1.6	1.6	1.6	-	1.6	1.6	1.6	-	1.6	1.7	1.7	-	1.8	1.8	1.9	-	1.6	1.5	1.5	-	1.6	1.6	1.6	-	1.6	1.6	1.6	-	1.6	1.6	1.6	-	1.6	1.7	1.7	-	1.8	1.8	1.9	-	5.8	5.5	5.6	-	5.9	6.1	6.3	-	6.3	6.4	6.6	-	6.7	6.8	7.1	-	7.1	7.3	7.5	-	7.1	7.3	7.5	-	5.8	5.5	5.6	-	5.9	6.1	6.3	-	6.3	6.4	6.6	-	6.7	6.8	7.1	-	7.1	7.3	7.5	-	7.1	7.3	7.5	-	230	247	261	-	261	281	297	-	261	281	297	-	298	320	338	-	335	361	381	-	370	398	421	-	230	247	261	-	261	281	297	-	261	281	297	-	298	320	338	-	335	361	381	-	370	398	421	-	105	112	122	-	109	116	127	-	105	112	122	-	115	122	133	-	120	128	139	-	124	132	144	-	105	112	122	-	109	116	127	-	105	112	122	-	115	122	133	-	120	128	139	-	124	132	144	-

75	900	23.3	24.0	26.0	27.9	22.8	23.5	25.4	27.2	22.2	22.9	24.8	26.6	21.7	22.3	24.2	25.9	20.6	21.2	23.0	24.6	19.1	19.7	21.3	22.8	20.6	21.2	23.0	24.6	19.1	19.7	21.3	22.8	20	18	15	10	20	19	15	10	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10	20	18	15	10	20	19	15	10	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	400	418	389	419	442	461	216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	400	418	389	419	442	461	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	22.6	23.3	25.2	27.1	22.1	22.8	24.6	26.4	21.6	22.2	24.1	25.8	21.1	21.7	23.5	25.2	20.0	20.6	22.3	23.9	18.5	19.1	20.7	22.2	22.6	23.3	25.2	27.1	22.1	22.8	24.6	26.4	21.6	22.2	24.1	25.8	21.1	21.7	23.5	25.2	20.0	20.6	22.3	23.9	18.5	19.1	20.7	22.2	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	21	19	16	11	21	19	16	11	21	20	16	11	21	20	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	20	16	11	21	19	16	11	21	19	16	11	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	213	230	242	253	239	258	272	284	272	293	309	323	310	334	352	368	349	375	396	414	386	415	438	457	213	230	242	253	239	258	272	284	272	293	309	323	310	334	352	368	349	375	396	414	386	415	438	457	103	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160	103	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160	20.9	21.5	23.3	25.0	20.4	21.0	22.7	24.4	19.9	20.5	22.2	23.8	19.4	20.0	21.7	23.3	18.5	19.0	20.6	22.1	17.1	17.6	19.1	20.5	20.9	21.5	23.3	25.0	20.4	21.0	22.7	24.4	19.9	20.5	22.2	23.8	19.4	20.0	21.7	23.3	18.5	19.0	20.6	22.1	17.1	17.6	19.1	20.5	0.8	0.7	0.5	0.3	0.8	0.7	0.5	0.3
----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	-----	-----	-----	-----	-----	-----	-----

EXPANDED COOLING DATA — SSX160241B\* / CA\*F3636\*6\*\* +TXV+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	900	MBh	23.7	24.3	25.9	27.7	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	22.1	22.6	24.1	25.8	21.0	21.4	22.9	24.5	19.4	19.9	21.2	22.7	
		S/T	0.9	0.9	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	
		ΔT	22	21	18	15	22	21	19	15	23	22	19	15	23	22	19	15	21	22	19	15	20	20	17	14	
		kW	1.5	1.5	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.9	1.8	1.8	1.9	1.9	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
		Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	7.7	8.0	8.3	8.0	8.2	8.4	8.8
		Hi PR	218	234	247	258	244	263	278	290	278	299	316	329	316	341	360	375	356	383	405	422	393	423	447	466	
	Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163		
	800	MBh	23.0	23.5	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.4	24.0	25.6	21.4	21.9	23.4	25.0	20.4	20.8	22.2	23.8	18.9	19.3	20.6	22.0	
		S/T	0.9	0.8	0.7	0.5	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	
		ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	24	23	22	19	22	21	18	14	
		kW	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1
		Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4
Hi PR		216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	401	418	389	419	443	462		
Lo PR	105	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162			
700	MBh	21.3	21.7	23.2	24.8	20.8	21.2	22.7	24.2	20.3	20.7	22.1	23.7	19.8	20.2	21.6	23.1	18.8	19.2	20.5	21.9	17.4	17.8	19.0	20.3		
	S/T	0.8	0.8	0.6	0.5	0.9	0.8	0.7	0.5	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	0.9	0.7	0.6		
	ΔT	23	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15		
	kW	1.5	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.7	1.8	1.8	1.8	1.9	1.8	1.8	1.9	2.0	1.9	1.9	2.0	2.0	
	Amps	5.4	5.6	5.7	5.9	5.9	6.0	6.2	6.4	6.4	6.5	6.7	7.0	6.8	7.0	7.2	7.5	7.2	7.4	7.7	8.0	7.7	7.9	8.1	8.4	8.4	
	Hi PR	209	225	238	248	235	252	267	278	267	287	303	316	304	327	345	360	342	368	388	405	378	406	429	448		
Lo PR	101	108	118	125	107	114	124	132	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157			
85	900	MBh	24.1	24.6	25.8	27.5	23.6	24.0	25.2	26.9	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	21.3	21.8	22.8	24.3	19.8	20.2	21.1	22.5	
		S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	1.0	0.8	1.0	1.0	1.0	0.8	
		ΔT	24	23	22	19	24	24	22	19	24	24	22	19	23	23	22	19	22	22	22	19	20	21	21	18	
		kW	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.8	1.8	1.7	1.8	1.9	1.8	1.8	1.9	2.0	2.0	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
		Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8	
		Hi PR	220	237	250	261	247	265	280	292	281	302	319	333	320	344	363	379	360	387	409	426	397	427	451	471	
	Lo PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165		
	800	MBh	23.4	23.9	25.0	26.7	22.9	23.3	24.4	26.1	22.4	22.8	23.9	25.5	21.8	22.2	23.3	24.8	20.7	21.1	22.1	23.6	19.2	19.6	20.5	21.9	
		S/T	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.7	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	
		ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	24	24	23	20	22	22	22	19	
		kW	1.5	1.5	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.9	1.8	1.8	1.9	1.9	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
		Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	8.0	8.3	8.0	8.2	8.4	8.8	
Hi PR		218	234	247	258	244	263	278	290	278	299	316	329	316	341	360	375	356	383	405	422	393	423	447	466		
Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163			
700	MBh	21.6	22.1	23.1	24.6	21.1	21.5	22.6	24.1	20.6	21.0	22.0	23.5	20.1	20.5	21.5	22.9	19.1	19.5	20.4	21.8	17.7	18.1	18.9	20.2		
	S/T	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.7	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7		
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19		
	kW	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.0	
	Amps	5.5	5.6	5.8	6.0	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.1	6.9	7.0	7.3	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	8.5	
	Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	372	392	409	382	411	434	452		
Lo PR	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	153	128	136	149	158			

kW = Total system power  
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRH (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — S5X160301A\* / CA\*F3642\*6C\*+TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	850	MBh	25.3	26.2	28.7	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.4	23.2	25.4	-	20.7	21.5	23.5	-	20.7	21.5	23.5	-
		S/T	0.70	0.59	0.41	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	0.81	0.67	0.47	-
	ΔT	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-	
	kW	1.84	1.87	1.92	-	1.96	1.99	2.05	-	2.06	2.10	2.16	-	2.16	2.20	2.26	-	2.24	2.28	2.35	-	2.31	2.35	2.42	-	
	Amps	5.4	5.5	5.7	-	5.8	5.9	6.1	-	6.3	6.5	6.7	-	6.7	6.9	7.1	-	7.2	7.3	7.6	-	7.6	7.8	8.0	-	
	Hi PR	219	235	249	-	245	264	279	-	279	300	317	-	318	342	361	-	358	385	406	-	395	425	449	-	
	Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-	
	MBh	27.4	28.4	31.1	-	26.8	27.8	30.4	-	26.1	27.1	29.7	-	25.5	26.4	29.0	-	24.2	25.1	27.5	-	22.4	23.3	25.5	-	
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
kW	1.87	1.91	1.96	-	2.00	2.04	2.09	-	2.11	2.15	2.21	-	2.21	2.25	2.31	-	2.29	2.33	2.40	-	2.36	2.41	2.48	-		
Amps	5.5	5.7	5.8	-	6.0	6.1	6.3	-	6.5	6.6	6.9	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-		
Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-		
Lo PR	116	124	135	-	123	131	143	-	128	136	148	-	134	143	156	-	141	150	163	-	145	155	169	-		
MBh	28.4	29.4	32.2	-	27.7	28.7	31.5	-	27.1	28.0	30.7	-	26.4	27.4	30.0	-	25.1	26.0	28.5	-	23.2	24.1	26.4	-		
S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-		
ΔT	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	14	12	9	-		
kW	1.90	1.94	1.99	-	2.03	2.07	2.12	-	2.14	2.18	2.24	-	2.24	2.28	2.35	-	2.32	2.37	2.44	-	2.40	2.44	2.52	-		
Amps	5.6	5.8	5.9	-	6.1	6.2	6.4	-	6.6	6.8	7.0	-	7.1	7.2	7.5	-	7.5	7.7	8.0	-	8.0	8.2	8.4	-		
Hi PR	230	247	261	-	258	278	293	-	293	316	334	-	334	360	380	-	376	405	427	-	415	447	472	-		
Lo PR	119	126	138	-	125	133	146	-	130	139	151	-	137	146	159	-	143	153	167	-	148	158	172	-		

75	850	MBh	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.1	24.5	25.3	27.3	29.4	23.9	24.6	26.7	28.6	22.7	23.4	25.3	27.2	21.1	21.7	23.5	25.2
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40
	ΔT	22	20	17	12	22	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	22	21	19	16	11
	kW	1.85	1.88	1.93	1.99	1.97	2.01	2.06	2.12	2.08	2.12	2.18	2.24	2.17	2.22	2.28	2.35	2.25	2.25	2.30	2.37	2.44	2.32	2.37	2.44	2.51
	Amps	5.4	5.6	5.7	5.9	5.9	6.0	6.2	6.4	6.4	6.5	6.7	7.0	6.8	7.0	7.2	7.5	7.2	7.2	7.4	7.7	8.0	7.7	7.9	8.1	8.4
	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	361	389	411	428	399	430	454	473
	Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	153	163	138	138	147	160	170	143	152	166	176
	MBh	27.9	28.7	31.1	33.4	27.2	28.0	30.4	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.5	29.5	22.8	23.5	25.4	27.3	
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
kW	1.89	1.92	1.98	2.03	2.01	2.05	2.11	2.17	2.12	2.17	2.23	2.29	2.22	2.27	2.33	2.40	2.31	2.35	2.42	2.49	2.38	2.43	2.50	2.57		
Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	
Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	372	401	423	441	412	443	468	488	
Lo PR	118	125	136	145	124	132	144	154	129	137	150	160	136	144	157	168	142	142	151	165	176	147	156	171	182	
MBh	28.9	29.7	32.2	34.5	28.2	29.0	31.4	33.7	27.5	28.3	30.7	32.9	26.8	27.6	29.9	32.1	25.5	26.3	28.4	30.5	23.6	24.3	26.3	28.3		
S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44		
ΔT	17	16	13	9	17	16	13	9	18	16	13	9	18	16	13	9	17	16	13	9	16	15	12	8		
kW	1.91	1.95	2.00	2.06	2.04	2.08	2.14	2.20	2.16	2.20	2.26	2.33	2.26	2.30	2.37	2.44	2.34	2.39	2.46	2.53	2.41	2.46	2.54	2.61		
Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.0	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8		
Hi PR	232	250	264	275	261	281	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	452	477	497		
Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185		

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX160301A\* / CA\*F3642\*6C\* +TXV +EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	850	MBh	26.2	26.8	28.6	30.6	25.6	26.1	27.9	29.9	25.0	25.5	27.3	29.1	24.4	24.9	26.6	28.4	23.1	23.7	25.3	27.0	21.4	21.9	23.4	25.0	
		S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57	
		ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16	
	1000	kW	1.86	1.90	1.95	2.00	1.98	2.02	2.08	2.14	2.09	2.13	2.19	2.26	2.19	2.23	2.30	2.37	2.27	2.32	2.38	2.46	2.34	2.39	2.46	2.53	
		Amps	5.5	5.6	5.8	6.0	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.0	6.9	7.0	7.3	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	
		Hi PR	223	240	254	265	250	269	285	297	285	306	324	338	324	349	369	384	365	393	415	433	403	434	458	478	
	1350	Lo PR	115	122	134	142	122	129	141	150	126	134	147	156	133	141	154	164	139	148	162	172	144	153	167	178	
		MBh	28.4	29.0	31.0	33.1	27.7	28.3	30.3	32.3	27.1	27.6	29.5	31.6	26.4	27.0	28.8	30.8	25.1	25.6	27.4	29.3	23.2	23.7	25.4	27.1	
		S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59	
	85	850	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15
			kW	1.90	1.94	1.99	2.05	2.03	2.07	2.12	2.19	2.14	2.18	2.24	2.31	2.24	2.28	2.35	2.42	2.32	2.37	2.44	2.51	2.40	2.44	2.52	2.59
			Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	8.0	8.3	8.0	8.2	8.4	8.8
1000		Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	428	446	416	447	472	493	
		Lo PR	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	153	167	177	148	158	172	184	
		MBh	29.4	30.0	32.1	34.3	28.7	29.3	31.3	33.5	28.0	28.6	30.6	32.7	27.3	27.9	29.8	31.9	26.0	26.5	28.3	30.3	24.0	24.6	26.2	28.1	
1350		S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63	
		ΔT	19	18	16	13	20	19	16	13	19	19	16	13	19	19	16	13	18	18	16	13	16	17	15	12	
		kW	1.93	1.96	2.02	2.07	2.06	2.10	2.16	2.22	2.17	2.21	2.28	2.34	2.27	2.32	2.39	2.46	2.36	2.41	2.48	2.55	2.43	2.48	2.56	2.63	
85		850	Amps	5.7	5.9	6.1	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9
			Hi PR	235	253	267	278	263	283	299	312	299	322	340	355	341	367	388	404	384	413	436	455	424	456	482	503
			Lo PR	121	129	141	150	128	136	149	158	133	141	154	164	140	149	162	173	146	156	170	181	151	161	176	187
	1000	MBh	26.7	27.2	28.5	30.4	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.8	25.3	26.5	28.2	23.6	24.0	25.1	26.8	21.8	22.2	23.3	24.8	
		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74	
		ΔT	26	26	25	21	27	26	25	22	27	26	25	22	27	27	25	22	25	26	25	21	24	24	23	20	
	1350	kW	1.87	1.91	1.96	2.02	2.00	2.04	2.09	2.15	2.11	2.15	2.21	2.28	2.21	2.25	2.31	2.38	2.29	2.33	2.40	2.47	2.36	2.41	2.48	2.55	
		Amps	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.5	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.3	8.6	
		Hi PR	225	243	256	267	253	272	287	300	288	310	327	341	328	353	372	388	369	397	419	437	407	438	463	483	
	85	850	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	141	150	163	174	145	155	169	180
			MBh	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.1	29.4	31.4	26.9	27.4	28.7	30.6	25.5	26.0	27.2	29.1	23.6	24.1	25.2	26.9
			S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
1000		ΔT	25	25	23	20	26	25	24	21	25	25	24	21	25	25	24	21	23	24	24	20	22	22	22	19	
		kW	1.91	1.95	2.00	2.06	2.04	2.08	2.14	2.20	2.16	2.20	2.26	2.33	2.26	2.30	2.37	2.44	2.34	2.39	2.46	2.53	2.41	2.46	2.54	2.61	
		Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8	
1350		Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498	
		Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185	
		MBh	29.9	30.5	31.9	34.0	29.2	29.8	31.2	33.2	28.5	29.0	30.4	32.5	27.8	28.3	29.7	31.7	26.4	26.9	28.2	30.1	24.5	24.9	26.1	27.9	
85		S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77	
		ΔT	20	20	19	17	20	20	19	17	19	20	19	17	19	19	20	17	18	18	19	17	17	17	18	16	
		kW	1.94	1.98	2.03	2.09	2.07	2.11	2.17	2.23	2.19	2.23	2.29	2.36	2.29	2.33	2.40	2.48	2.38	2.42	2.50	2.57	2.45	2.50	2.58	2.65	
85	Amps	5.8	5.9	6.1	6.3	6.2	6.4	6.6	6.9	6.8	6.9	7.2	7.5	7.3	7.4	7.7	8.0	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0		
	Hi PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	388	417	440	459	428	461	487	508		
	Lo PR	122	130	142	151	129	137	150	160	134	143	156	166	141	150	164	174	148	157	172	183	153	163	178	189		

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX160301A\* / CA\*F3642\*6C\* +TXV/MBVC1600\*\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	850	MBh	25.6	26.5	29.1	-	25.0	25.9	28.4	-	24.4	25.3	27.7	-	23.8	24.7	27.1	-	22.6	23.5	25.7	-	21.0	21.7	23.8	-	
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
	1000	kW	1.73	1.76	1.81	-	1.85	1.88	1.94	-	1.95	1.99	2.05	-	2.04	2.08	2.15	-	2.12	2.16	2.23	-	2.19	2.23	2.30	-	
		Amps	6.3	6.4	6.7	-	6.8	7.0	7.2	-	7.4	7.5	7.8	-	7.9	8.0	8.3	-	8.4	8.6	8.8	-	8.8	9.1	9.4	-	
		Hi PR	220	237	250	-	247	266	281	-	281	303	320	-	320	345	364	-	360	388	410	-	398	429	453	-	
	1350	Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-	
		MBh	27.8	28.8	31.5	-	27.1	28.1	30.8	-	26.5	27.4	30.0	-	25.8	26.8	29.3	-	24.5	25.4	27.9	-	22.7	23.5	25.8	-	
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	
	75	850	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
			kW	1.77	1.80	1.85	-	1.89	1.92	1.98	-	1.99	2.03	2.09	-	2.09	2.13	2.20	-	2.17	2.21	2.28	-	2.24	2.29	2.36	-
			Amps	6.5	6.6	6.8	-	7.0	7.1	7.4	-	7.6	7.7	8.0	-	8.1	8.3	8.5	-	8.6	8.8	9.1	-	9.1	9.3	9.6	-
1000		Hi PR	227	245	258	-	255	274	290	-	290	312	330	-	330	355	375	-	372	400	422	-	411	442	467	-	
		Lo PR	116	124	135	-	123	131	143	-	128	136	148	-	134	143	156	-	141	150	163	-	145	155	169	-	
		MBh	28.7	29.8	32.6	-	28.1	29.1	31.9	-	27.4	28.4	31.1	-	26.7	27.7	30.3	-	25.4	26.3	28.8	-	23.5	24.4	26.7	-	
1350		S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-	
		ΔT	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	14	12	9	-	
		kW	1.79	1.82	1.88	-	1.91	1.95	2.01	-	2.02	2.06	2.13	-	2.12	2.16	2.23	-	2.20	2.25	2.32	-	2.27	2.32	2.39	-	
75		850	Amps	6.6	6.7	7.0	-	7.1	7.3	7.5	-	7.7	7.9	8.1	-	8.2	8.4	8.7	-	8.7	9.0	9.2	-	9.3	9.5	9.8	-
			Hi PR	232	249	263	-	260	280	296	-	296	318	336	-	337	363	383	-	379	408	431	-	419	451	476	-
			Lo PR	119	126	138	-	125	133	146	-	130	139	151	-	137	146	159	-	143	153	167	-	148	158	172	-
	1000	MBh	26.0	26.8	29.0	31.2	25.4	26.2	28.4	30.4	24.8	25.6	27.7	29.7	24.2	24.9	27.0	29.0	23.0	23.7	25.7	27.5	21.3	22.0	23.8	25.5	
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	
		ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	19	16	11
	1350	kW	1.74	1.77	1.82	1.88	1.86	1.90	1.95	2.01	1.96	2.00	2.06	2.12	2.06	2.10	2.16	2.23	2.14	2.18	2.25	2.32	2.20	2.25	2.32	2.39	
		Amps	6.4	6.5	6.7	7.0	6.9	7.0	7.2	7.5	7.4	7.6	7.9	8.1	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	8.9	9.1	9.4	9.8	
		Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457	477	
	75	850	Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	153	163	138	147	160	170	143	152	166	176
			MBh	28.2	29.1	31.5	33.8	27.6	28.4	30.7	33.0	26.9	27.7	30.0	32.2	26.3	27.0	29.3	31.4	24.9	25.7	27.8	29.8	23.1	23.8	25.7	27.6
			S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
1000		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11	
		kW	1.78	1.81	1.86	1.92	1.90	1.94	1.99	2.05	2.01	2.05	2.11	2.17	2.11	2.15	2.21	2.28	2.19	2.23	2.30	2.37	2.26	2.30	2.37	2.45	
		Amps	6.5	6.7	6.9	7.1	7.0	7.2	7.4	7.7	7.6	7.8	8.1	8.4	8.2	8.3	8.6	8.9	8.7	8.9	9.2	9.5	9.2	9.4	9.7	10.1	
1350		Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	395	375	404	427	445	415	446	471	492	
		Lo PR	118	125	136	145	124	132	144	154	129	137	150	160	136	144	157	168	142	151	165	176	147	156	171	182	
		MBh	29.2	30.1	32.6	34.9	28.5	29.4	31.8	34.1	27.9	28.7	31.0	33.3	27.2	28.0	30.3	32.5	25.8	26.6	28.8	30.9	23.9	24.6	26.6	28.6	
1350		S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44	
		ΔT	17	16	13	9	18	16	13	9	18	16	13	9	18	16	13	9	18	16	13	9	16	15	12	9	
		kW	1.80	1.84	1.89	1.95	1.93	1.97	2.02	2.09	2.04	2.08	2.14	2.21	2.14	2.18	2.25	2.32	2.22	2.27	2.34	2.41	2.29	2.34	2.41	2.49	
1350	Amps	6.6	6.8	7.0	7.3	7.2	7.3	7.6	7.9	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	9.3	9.6	9.9	10.3		
	Hi PR	234	252	266	278	263	283	299	311	299	322	340	354	340	366	387	403	383	412	435	454	423	455	481	501		
	Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



EXPANDED COOLING DATA — Ssx160301A\* / CA\*F3642\*6C\* +TXV/MBVC1600\* (CONT.)

IDB	OUTDOOR AMBIENT TEMPERATURE																																																																																																		
	65°F										75°F										85°F										95°F										105°F										115°F																																																
											ENTERING INDOOR WET BULB TEMPERATURE																																																																																								
	59	63	67	71	75	79	83	87	91	59	63	67	71	75	79	83	87	91	95	59	63	67	71	75	79	83	87	91	95	59	63	67	71	75	79	83	87	91	95	59	63	67	71	75	79	83	87	91	95	59	63	67	71	75	79	83	87	91	95																																								
<b>80</b>	MBh	26.5	27.1	28.9	30.9	32.7	34.5	36.3	38.1	25.3	25.8	27.6	29.5	31.2	32.9	34.6	36.3	38.0	39.7	24.7	25.2	26.9	28.8	30.6	32.4	34.2	36.0	37.8	39.5	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8	23.4	23.9	25.6	27.3	29.0	30.8	32.5	34.3	36.0	37.8
	S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.97	0.79	0.59	0.96	0.90	0.73	0.55	0.96	0.90	0.73	0.55	0.96	0.90	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93									
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	26	25	21	17	26	25	21	17	26	25	25	24	21	17	25	24	21	17	25	24	25	24	21	17	25	24	21	17	25	24	25	24	21	17	25	24	21	17	25	24	25	24	21	17	25	24	21	17	25	24	25	24	21	17	25	24	21	17	25	24	25	24	21	17	25	24	21	17	25	24									
	kW	1.75	1.79	1.84	1.89	1.87	1.91	1.96	2.02	2.08	1.98	2.02	2.08	2.14	2.07	2.12	2.18	2.25	2.33	2.07	2.12	2.18	2.25	2.33	2.41	2.49	2.57	2.65	2.72	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80	2.15	2.20	2.26	2.33	2.41	2.49	2.57	2.65	2.72	2.80										
	Amps	6.4	6.6	6.8	7.0	6.9	7.1	7.3	7.6	8.2	7.5	7.7	7.9	8.4	8.0	8.2	8.5	8.8	9.3	8.0	8.2	8.5	8.8	9.3	9.0	9.3	9.6	10.0	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	8.5	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6											
	Hi PR	225	242	256	267	252	272	287	299	326	309	326	340	327	352	372	387	406	437	368	396	418	436	454	472	490	508	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544	368	396	418	436	454	472	490	508	526	544		
Lo PR	115	122	134	142	122	129	141	150	161	126	134	147	156	133	141	154	164	172	139	148	162	172	144	153	167	178	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200	139	148	162	172	144	153	167	178	189	200			
MBh	28.7	29.4	31.4	33.5	28.1	28.7	30.6	32.7	34.8	27.4	28.0	29.9	32.0	26.7	27.3	29.2	31.2	33.2	26.7	27.3	29.2	31.2	33.2	35.2	37.2	39.2	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4	29.1	30.8			
S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	0.96	0.90	0.73	0.55	0.97	0.79	0.59	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93										
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	24	23	20	16	24	23	20	16	24	23	23	23	20	16	22	22	20	16	22	22	23	23	20	16	22	22	20	16	22	22	23	23	20	16	22	22	20	16	22	22	23	23	20	16	22	22	20	16	22	22	23	23	20	16	22	22	20	16	22	22	23	23	20	16	22	22	20	16	22	22										
kW	1.79	1.83	1.88	1.93	1.92	1.95	2.01	2.07	2.13	2.02	2.07	2.13	2.19	2.12	2.16	2.23	2.30	2.39	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87	2.20	2.25	2.32	2.39	2.47	2.55	2.63	2.71	2.79	2.87													
Amps	6.6	6.7	7.0	7.2	7.1	7.3	7.5	7.8	8.4	7.7	7.9	8.1	8.4	8.2	8.4	8.7	9.0	9.6	8.7	9.0	9.3	9.6	9.3	9.6	10.0	10.4	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0	8.7	9.0	9.3	9.6	10.0	10.4	10.8	11.2	11.6	12.0													
Hi PR	232	250	264	275	260	280	296	308	336	351	337	363	383	337	363	383	399	449	379	408	431	449	449	451	476	497	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539	379	408	431	449	449	451	476	497	518	539			
Lo PR	119	126	138	147	125	133	146	155	161	130	139	151	161	137	146	159	169	177	143	153	167	177	148	158	172	184	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208	143	153	167	177	148	158	172	184	196	208			
MBh	29.7	30.4	32.5	34.7	29.0	29.7	31.7	33.9	36.1	28.3	29.0	30.9	33.1	27.7	28.3	30.2	32.3	34.4	26.3	26.8	28.7	30.7	32.8	34.9	37.0	39.1	26.3	26.8	28.7	30.7	32.8	34.9	37.0	39.1	41.2	43.3	26.3	26.8	28.7	30.7	32.8	34.9	37.0	39.1	41.2	43.3	26.3	26.8	28.7	30.7	32.8	34.9	3																																														

EXPANDED COOLING DATA — SSX160361B\* / CA\*F4860\*6\*\* +TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
70	1350	MBh	33.7	34.9	38.3	-	32.1	33.3	36.5	-	31.4	32.5	35.6	-	29.8	30.9	33.8	-	27.6	28.6	31.3	-									
		S/T	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-									
		ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-									
		kW	2.2	2.2	2.3	-	2.3	2.4	2.4	-	2.6	2.6	2.7	-	2.7	2.7	2.8	-	2.8	2.8	2.9	-									
		Amps	9.1	9.3	9.6	-	9.8	10.0	10.3	-	11.1	11.1	11.9	-	12.0	12.2	12.6	-	12.6	12.9	13.4	-									
	1200	Hi PR	225	242	256	-	253	272	287	-	288	309	327	-	328	352	372	-	368	396	419	-									
		Lo PR	109	116	127	-	116	123	134	-	120	128	139	-	126	134	146	-	132	141	154	-									
		MBh	32.7	33.9	37.2	-	31.2	32.3	35.4	-	30.4	31.6	34.6	-	28.9	30.0	32.8	-	26.8	27.8	30.4	-									
		S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-									
		ΔT	18	16	12	-	18	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-									
1050	kW	2.1	2.2	2.2	-	2.3	2.3	2.4	-	2.4	2.5	2.6	-	2.5	2.5	2.6	-	2.6	2.6	2.7	-										
	Amps	9.0	9.2	9.5	-	9.7	9.9	10.2	-	11.2	11.4	11.8	-	11.8	12.1	12.5	-	12.5	12.8	13.2	-										
	Hi PR	223	240	254	-	250	269	284	-	285	306	324	-	324	349	368	-	365	393	415	-										
	Lo PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-										
	MBh	30.2	31.3	34.3	-	28.8	29.9	32.7	-	28.1	29.1	31.9	-	26.7	27.7	30.3	-	24.7	25.6	28.1	-										
75	1350	S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-									
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-									
		kW	2.1	2.1	2.2	-	2.2	2.3	2.4	-	2.4	2.4	2.5	-	2.5	2.5	2.6	-	2.6	2.6	2.7	-									
		Amps	8.7	8.9	9.2	-	9.4	9.6	9.9	-	10.2	10.4	10.8	-	10.9	11.1	11.5	-	11.5	11.8	12.2	-									
		Hi PR	216	233	246	-	243	261	276	-	276	297	314	-	315	338	357	-	354	381	402	-									
	1200	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-									
		MBh	34.3	35.3	38.2	41.0	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.8	35.5	38.1	30.3	31.2	33.8	36.2									
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.6	0.4	1.0	0.9	0.7	0.4									
		ΔT	20	19	15	11	21	19	15	11	21	19	15	11	21	19	16	11	20	19	15	11									
		kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	3.0								
1050	Hi PR	228	245	259	270	255	275	290	303	290	313	330	344	331	356	376	392	372	401	423	441										
	Lo PR	110	118	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165										
	MBh	33.3	34.3	37.1	39.8	32.5	33.5	36.2	38.9	31.7	32.7	35.4	38.0	31.0	31.9	34.5	37.0	29.4	30.3	32.8	35.2										
	S/T	0.8	0.7	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4										
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11										
75	kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.4	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	3.0									
	Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.6	12.0	12.4	12.1	12.3	12.7	13.2										
	Hi PR	225	243	256	267	253	272	287	300	288	310	327	341	328	353	372	388	369	397	419	437										
	Lo PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	147	156	132	141	154	164										
	MBh	30.7	31.6	34.2	36.7	30.0	30.9	33.4	35.9	29.3	30.2	32.6	35.0	28.6	29.4	31.8	34.2	27.1	28.0	30.3	32.5										
1050	S/T	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4										
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11										
	kW	2.1	2.1	2.2	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.7	2.7	2.8	2.9									
	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.2	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7										
	Hi PR	219	235	248	259	245	264	279	291	279	300	317	331	318	342	361	377	357	385	406	424										
Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159											

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.  
Shaded area reflects ACCA (TVA) conditions  
kW = Total system power  
Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSX160361B\* / CA\*F4860\*6\*\*+TXV+EEP (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE										ENTERING INDOOR WET BULB TEMPERATURE										115°F																																																																															
		65°F					75°F					85°F					95°F							105°F																																																																													
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75			59	63	67	71	75																																																																									
1350	MBh	34.9	35.7	38.1	40.7	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.4	37.9	30.8	31.5	33.7	36.0	28.6	29.2	31.2	33.3	S/T	1.0	0.9	0.7	0.5	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	ΔT	23	22	19	15	23	22	19	15	22	23	19	15	22	23	19	15	21	21	19	15	19	20	18	14	kW	2.2	2.2	2.3	2.4	2.3	2.4	2.5	2.5	2.5	2.5	2.5	2.6	2.7	2.6	2.7	2.8	2.7	2.7	2.8	2.9	2.9	2.8	2.9	2.9	3.0
80	Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.7	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.2	12.5	12.9	13.3	12.9	13.2	13.6	14.1	Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492	Lo PR	112	119	130	138	118	125	137	146	123	130	142	152	129	137	149	159	135	143	157	167	140	148	162	173																										
	MBh	33.9	34.6	37.0	39.5	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	29.9	30.6	32.7	34.9	27.7	28.3	30.3	32.4	S/T	0.9	0.9	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	18	15	kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	2.8	2.8	2.9	3.0	
	Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.6	12.0	12.4	12.1	12.3	12.7	13.2	12.8	13.1	13.5	14.0	Hi PR	228	245	259	270	255	275	290	303	291	313	330	344	331	356	376	392	372	401	423	441	411	443	467	487	Lo PR	110	118	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171																										
	MBh	31.3	31.9	34.1	36.5	30.5	31.2	33.3	35.6	29.8	30.5	32.5	34.8	29.1	29.7	31.8	33.9	27.6	28.2	30.2	32.2	25.6	26.2	27.9	29.9	S/T	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.6	1.0	0.9	0.8	0.6	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	22	19	15	kW	2.1	2.2	2.2	2.3	2.3	2.3	2.4	2.5	2.4	2.5	2.5	2.6	2.5	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	
1050	Amps	8.9	9.1	9.4	9.7	9.6	9.8	10.1	10.5	10.4	10.6	11.0	11.3	11.1	11.3	11.7	12.1	11.7	12.0	12.4	12.9	12.4	12.7	13.1	13.6	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	345	365	380	361	389	410	428	399	429	453	473	Lo PR	107	114	124	133	113	120	132	140	118	125	137	146	124	132	144	153	130	138	150	160	134	143	156	166																										
	MBh	35.5	36.2	37.9	40.4	34.7	35.3	37.0	39.5	33.8	34.5	36.1	38.6	33.0	33.7	35.3	37.6	31.4	32.0	33.5	35.7	29.1	29.6	31.0	33.1	S/T	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.8	ΔT	24	24	22	19	24	24	23	20	23	23	23	20	22	23	23	20	21	22	23	20	20	20	21	18	kW	2.2	2.2	2.3	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.7	2.8	2.9	2.7	2.8	2.9	3.0	2.8	2.9	3.0	3.1	
1350	Amps	9.3	9.5	9.8	10.2	10.0	10.2	10.6	10.9	10.8	11.1	11.5	11.9	11.6	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.3	13.7	14.2	Hi PR	232	250	264	275	261	280	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	451	477	497	Lo PR	113	120	131	139	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	169	141	150	164	174																										
	MBh	34.5	35.1	36.8	39.3	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.4	32.1	32.7	34.2	36.5	30.5	31.0	32.5	34.7	28.2	28.8	30.1	32.1	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.8	1.0	1.0	0.8	0.8	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	23	24	24	20	22	22	22	19	kW	2.2	2.2	2.3	2.4	2.3	2.4	2.5	2.5	2.5	2.5	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.8	2.9	2.9	2.8	2.9	2.9	3.0	
1200	Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.7	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.2	12.5	12.9	13.3	12.9	13.2	13.6	14.1	Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492	Lo PR	112	119	130	138	118	125	137	146	123	130	142	152	129	137	149	159	135	143	157	167	140	148	162	173																										
	MBh	31.8	32.4	34.0	36.2	31.1	31.7	33.2	35.4	30.3	30.9	32.4	34.5	29.6	30.2	31.6	33.7	28.1	28.7	30.0	32.0	26.0	26.5	27.8	29.7	S/T	0.9	0.9	0.8	0.6	1.0	1.0	0.9	0.8	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	ΔT	26	25	24	21	26	25	24	21	26	25	24	21	26	26	24	21	25	25	24	21	23	23	22	19	kW	2.1	2.2	2.2	2.2	2.3	2.3	2.4	2.5	2.4	2.5	2.5	2.6	2.5	2.6	2.7	2.8	2.6	2.7	2.8	2.9	2.7	2.8	2.9	3.0	
1050	Amps	9.0	9.2	9.5	9.8	9.7	9.9	10.2	10.6	10.5	10.7	11.0	11.4	11.2	11.4	11.8	12.2	11.8	12.1	12.5	13.0	12.5	12.8	13.2	13.7	Hi PR	223	240	253	264	250	269	284	297	285	306	323	337	324	349	368	384	365	392	414	432	403	434	458	478	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167																										

kW = Total system power  
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — S5X160421A\* / CA\*F4860\*6B\* +TXV +EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	34.2	35.4	38.8	-	33.4	34.6	37.9	-	32.6	33.8	37.0	-	31.8	33.0	36.1	-	30.2	31.3	34.3	-	28.0	29.0	31.8	-	
		S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
		Δ T	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	1400	kW	2.56	2.60	2.66	-	2.71	2.75	2.82	-	2.84	2.89	2.96	-	2.96	3.01	3.09	-	3.05	3.11	3.19	-	3.14	3.19	3.28	-	
		Amps	7.7	7.9	8.2	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.1	-	10.2	10.4	10.8	-	10.8	11.0	11.4	-	
		HI PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-	
	1575	LO PR	111	119	129	-	118	125	137	-	122	130	142	-	128	137	149	-	135	143	156	-	139	148	162	-	
		MBh	37.0	38.4	42.1	-	36.2	37.5	41.1	-	35.3	36.6	40.1	-	34.5	35.7	39.1	-	32.7	33.9	37.2	-	30.3	31.4	34.4	-	
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
	75	1225	Δ T	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
			kW	2.58	2.62	2.68	2.75	2.73	2.77	2.84	2.91	2.86	2.91	2.98	3.06	2.98	3.03	3.11	3.19	3.07	3.13	3.21	3.30	3.16	3.22	3.30	3.39
			Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.7	9.9	10.2	10.6	10.3	10.5	10.9	11.3	10.9	11.1	11.5	11.9
1400		HI PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471	
		LO PR	113	120	131	139	119	127	138	147	124	131	144	153	130	138	151	161	136	145	158	168	141	150	163	174	
		MBh	37.7	38.8	42.0	45.1	36.8	37.9	41.0	44.0	35.9	37.0	40.0	43.0	35.0	36.1	39.1	41.9	33.3	34.3	37.1	39.8	30.8	31.8	34.4	36.9	
1575		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	
		Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
		kW	2.62	2.67	2.73	2.80	2.78	2.83	2.90	2.97	2.92	2.97	3.04	3.12	3.04	3.09	3.17	3.26	3.14	3.19	3.28	3.37	3.23	3.28	3.37	3.47	
75		1400	Amps	8.0	8.2	8.4	8.7	8.6	8.8	9.1	9.3	9.5	9.9	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.4	11.8	12.2	
			HI PR	227	244	257	269	254	274	289	301	289	311	329	343	329	354	374	390	370	399	421	439	409	441	465	485
			LO PR	116	123	135	144	123	130	142	152	127	136	148	158	134	142	155	166	140	149	163	173	145	154	168	179
75	1575	MBh	38.8	40.0	43.2	46.4	37.9	39.0	42.2	45.3	37.0	38.1	41.2	44.3	36.1	37.2	40.2	43.2	34.3	35.3	38.2	41.0	31.8	32.7	35.4	38.0	
		S/T	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44	
		Δ T	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10	
75	1575	kW	2.64	2.68	2.75	2.82	2.80	2.84	2.92	2.99	2.93	2.99	3.06	3.14	3.06	3.11	3.19	3.28	3.16	3.22	3.30	3.39	3.25	3.31	3.40	3.49	
		Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.5	11.9	12.3	
		HI PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	443	413	445	470	490	
75	1575	LO PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	157	167	142	151	165	175	147	156	170	181	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160421A\* / CA\*F4860\*6B\* +TXV +EEP (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE																											
		65°F					75°F					85°F					95°F				105°F				115°F				
		ENTERING INDOOR WET BULB TEMPERATURE																											
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67
<b>1225</b>	MBh	35.4	36.2	38.6	41.3	34.6	35.3	37.7	40.3	33.7	34.5	36.8	39.4	32.9	33.6	35.9	38.4	31.3	32.0	34.1	36.5	29.0	29.6	31.6	33.8				
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.01	0.95	0.77	0.58	1.02	0.95	0.78	0.58				
	Δ T	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15				
	kW	2.59	2.63	2.70	2.76	2.74	2.79	2.86	2.93	2.88	2.93	3.00	3.08	3.00	3.05	3.13	3.21	3.10	3.15	3.23	3.32	3.18	3.24	3.33	3.42				
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	8.9	9.3	9.2	9.4	9.7	10.0	9.8	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.0	11.2	11.6	12.0				
	HI PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475				
	LO PR	114	121	132	141	120	128	139	149	125	133	145	154	131	139	152	162	137	146	160	170	142	151	165	176				
<b>80</b>	MBh	38.3	39.2	41.9	44.7	37.5	38.3	40.9	43.7	36.6	37.4	39.9	42.7	35.7	36.4	<b>38.9</b>	41.6	33.9	34.6	37.0	39.5	31.4	32.1	34.3	36.6				
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	<b>0.77</b>	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60				
	Δ T	23	22	19	15	23	22	20	16	23	22	20	16	23	23	<b>20</b>	16	22	22	19	16	21	21	18	14				
	kW	2.64	2.68	2.75	2.82	2.80	2.84	2.92	2.99	2.93	2.99	3.06	3.14	3.06	3.11	<b>3.19</b>	3.28	3.16	3.22	3.30	3.39	3.25	3.31	3.40	3.49				
	Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.0	10.3	<b>10.6</b>	11.0	10.7	10.9	11.3	11.7	11.3	11.5	11.9	12.3				
	HI PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	<b>378</b>	394	374	403	425	444	413	445	470	490				
	LO PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	<b>157</b>	167	142	151	165	175	147	156	170	181				
<b>1575</b>	MBh	39.5	40.4	43.1	46.1	38.6	39.4	42.1	45.0	37.7	38.5	41.1	43.9	36.7	37.5	40.1	42.9	34.9	35.7	38.1	40.7	32.3	33.0	35.3	37.7				
	S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63				
	Δ T	22	21	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	21	19	15	19	19	17	14				
	kW	2.66	2.70	2.77	2.84	2.81	2.86	2.93	3.01	2.95	3.00	3.08	3.16	3.08	3.13	3.21	3.30	3.18	3.24	3.32	3.42	3.27	3.33	3.42	3.52				
	Amps	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8	11.4	11.6	12.0	12.5				
	HI PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495				
	LO PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183				
<b>1225</b>	MBh	36.0	36.7	38.4	41.0	35.2	35.9	37.6	40.1	34.3	35.0	36.7	39.1	33.5	34.1	35.8	38.2	31.8	32.4	34.0	36.2	29.5	30.0	31.5	33.6				
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75				
	Δ T	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	24	24	23	20	22	23	22	19				
	kW	2.61	2.65	2.71	2.78	2.76	2.81	2.88	2.95	2.90	2.95	3.02	3.10	3.01	3.07	3.15	3.23	3.12	3.17	3.26	3.35	3.20	3.26	3.35	3.44				
	Amps	7.9	8.1	8.4	8.7	8.5	8.7	9.0	9.3	9.3	9.5	9.8	10.1	9.9	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.3	11.7	12.1				
	HI PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480				
	LO PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178				
<b>1400</b>	MBh	39.0	39.8	41.7	44.4	38.1	38.8	40.7	43.4	37.2	37.9	39.7	42.4	36.3	37.0	38.7	41.3	34.5	35.1	36.8	39.3	31.9	32.6	34.1	36.4				
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78				
	Δ T	25	24	23	20	25	25	23	20	24	25	23	20	24	24	23	20	23	23	23	20	21	21	21	19				
	kW	2.66	2.70	2.77	2.84	2.81	2.86	2.93	3.01	2.95	3.00	3.08	3.16	3.08	3.13	3.21	3.30	3.18	3.24	3.32	3.42	3.27	3.33	3.42	3.52				
	Amps	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8	11.4	11.6	12.0	12.5				
	HI PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495				
	LO PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183				
<b>1575</b>	MBh	40.2	41.0	42.9	45.8	39.2	40.0	41.9	44.7	38.3	39.1	40.9	43.6	37.4	38.1	39.9	42.6	35.5	36.2	37.9	40.4	32.9	33.5	35.1	37.5				
	S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.96	0.81	1.00	1.00	0.96	0.82				
	Δ T	23	23	22	19	23	23	22	19	22	23	22	19	22	22	22	19	21	21	22	20	19	20	20	18				
	kW	2.67	2.72	2.78	2.85	2.83	2.88	2.95	3.03	2.97	3.02	3.10	3.19	3.10	3.15	3.24	3.32	3.20	3.26	3.35	3.44	3.29	3.35	3.44	3.54				
	Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.3	9.7	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.5	11.9	11.5	11.7	12.1	12.6				
	HI PR	233	251	265	277	262	282	298	310	298	321	339	353	339	365	386	402	382	411	434	452	422	454	479	500				
	LO PR	120	127	139	148	126	134	147	156	131	140	152	162	138	147	160	171	145	154	168	179	149	159	174	185				

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.



EXPANDED COOLING DATA — SSX160421A\* / CA\*F4860\*6B\* +TXV/MBVC2000\*\* (CONT.)

		OUTDOOR AMBIENT TEMPERATURE										ENTERING INDOOR WET BULB TEMPERATURE																			
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	
1225	MBh	35.8	36.6	39.1	41.8	41.8	35.0	35.8	38.2	40.9	40.9	34.2	34.9	37.3	39.9	39.9	33.3	34.1	36.4	38.9	38.9	31.7	32.4	34.6	37.0	37.0	29.3	30.0	32.0	34.2	
	S/T	0.90	0.84	0.69	0.51	0.51	0.93	0.87	0.71	0.53	0.53	0.95	0.90	0.73	0.54	0.54	0.99	0.92	0.75	0.56	0.56	1.02	0.96	0.78	0.58	0.58	1.03	0.97	0.79	0.59	
	ΔT	24	23	20	16	16	24	23	20	16	16	24	23	20	16	16	25	24	21	16	16	24	23	20	16	16	23	22	19	15	
	kW	2.31	2.36	2.43	2.50	2.50	2.48	2.53	2.60	2.68	2.68	2.62	2.68	2.76	2.85	2.85	2.75	2.81	2.90	2.99	2.99	2.86	2.92	3.02	3.11	3.11	2.96	3.02	3.12	3.22	
	Amps	8.8	9.0	9.3	9.7	9.7	9.5	9.7	10.1	10.4	10.4	10.3	10.6	10.9	11.3	11.3	11.0	11.3	11.7	12.1	12.1	11.7	12.0	12.4	12.9	12.9	12.4	12.7	13.2	13.7	
	Hi PR	222	239	252	263	263	249	268	283	295	295	283	305	322	336	336	323	347	367	382	382	363	391	412	430	430	401	432	456	475	
Lo PR	114	121	132	141	141	120	128	139	149	149	125	133	145	154	154	131	139	152	162	162	137	146	160	170	170	142	151	165	176		
80	MBh	38.8	39.7	42.4	45.3	45.3	37.9	38.8	41.4	44.3	44.3	37.0	37.8	40.4	43.2	43.2	36.1	36.9	39.4	42.2	42.2	34.3	35.1	37.5	40.1	40.1	31.8	32.5	34.7	37.1	
	S/T	0.93	0.87	0.71	0.53	0.53	0.97	0.91	0.74	0.55	0.55	0.99	0.93	0.76	0.56	0.56	1.00	0.96	0.78	0.58	0.58	1.00	0.99	0.81	0.61	0.61	1.00	1.00	0.82	0.61	
	ΔT	24	23	20	16	16	24	23	20	16	16	24	23	20	16	16	24	23	20	16	16	23	23	20	16	16	21	21	19	15	
	kW	2.36	2.41	2.48	2.56	2.56	2.53	2.59	2.67	2.75	2.75	2.69	2.74	2.83	2.92	2.92	2.82	2.88	2.97	3.07	3.07	2.93	3.00	3.09	3.19	3.19	3.03	3.10	3.20	3.30	
	Amps	9.1	9.3	9.6	9.9	9.9	9.8	10.0	10.3	10.7	10.7	10.6	10.9	11.2	11.6	11.6	11.3	11.6	12.0	12.5	12.5	12.1	12.4	12.8	13.3	13.3	12.8	13.1	13.5	14.0	
	Hi PR	229	246	260	271	271	257	276	292	304	304	292	314	332	346	346	333	358	378	394	394	374	403	425	444	444	413	445	470	490	
Lo PR	117	125	136	145	145	124	132	144	153	153	129	137	149	159	159	135	144	157	167	167	142	151	165	175	175	147	156	170	181		
1575	MBh	40.0	40.9	43.7	46.7	46.7	39.1	39.9	42.7	45.6	45.6	38.1	39.0	41.6	44.5	44.5	37.2	38.0	40.6	43.4	43.4	35.4	36.1	38.6	41.3	41.3	32.7	33.5	35.7	38.2	
	S/T	1.00	0.92	0.75	0.56	0.56	1.00	0.95	0.77	0.58	0.58	1.00	1.00	0.79	0.59	0.59	1.00	1.00	0.82	0.61	0.61	1.00	1.00	0.85	0.63	0.63	1.00	1.00	0.86	0.64	
	ΔT	23	22	19	15	15	23	22	19	15	15	22	23	19	15	15	22	22	19	15	15	21	21	19	15	15	19	20	18	14	
	kW	2.38	2.43	2.50	2.58	2.58	2.55	2.61	2.69	2.77	2.77	2.71	2.76	2.85	2.94	2.94	2.84	2.90	2.99	3.09	3.09	2.96	3.02	3.12	3.22	3.22	3.06	3.12	3.22	3.33	
	Amps	9.1	9.4	9.7	10.0	10.0	9.9	10.1	10.4	10.8	10.8	10.7	11.0	11.3	11.8	11.8	11.4	11.7	12.1	12.6	12.6	12.2	12.5	12.9	13.4	13.4	12.9	13.2	13.7	14.2	
	Hi PR	231	249	263	274	274	259	279	295	307	307	295	317	335	350	350	336	362	382	398	398	378	407	430	448	448	418	449	475	495	
Lo PR	118	126	137	146	146	125	133	145	155	155	130	138	151	161	161	137	145	159	169	169	143	152	166	177	177	148	157	172	183		
1225	MBh	36.5	37.2	38.9	41.5	41.5	35.6	36.3	38.0	40.6	40.6	34.8	35.4	37.1	39.6	39.6	33.9	34.6	36.2	38.6	38.6	32.2	32.9	34.4	36.7	36.7	29.9	30.4	31.9	34.0	
	S/T	0.94	0.91	0.82	0.67	0.67	0.98	0.94	0.85	0.69	0.69	1.00	0.97	0.87	0.71	0.71	1.00	1.00	0.90	0.73	0.73	1.00	1.00	0.93	0.76	0.76	1.00	1.00	0.94	0.76	
	ΔT	26	25	24	21	21	26	26	24	21	21	26	26	24	21	21	25	26	24	21	21	24	25	24	21	21	22	23	23	19	
	kW	2.33	2.37	2.44	2.52	2.52	2.50	2.55	2.62	2.70	2.70	2.64	2.70	2.78	2.87	2.87	2.77	2.83	2.92	3.01	3.01	2.89	2.95	3.04	3.14	3.14	2.98	3.05	3.14	3.25	
	Amps	8.9	9.1	9.4	9.7	9.7	9.6	9.8	10.1	10.5	10.5	10.4	10.7	11.0	11.4	11.4	11.1	11.4	11.8	12.2	12.2	11.8	12.1	12.5	13.0	13.0	12.5	12.8	13.3	13.8	
	Hi PR	224	241	255	266	266	252	271	286	298	298	286	308	325	339	339	326	351	370	386	386	367	395	417	435	435	405	436	460	480	
Lo PR	115	122	133	142	142	121	129	141	150	150	126	134	146	156	156	132	141	154	164	164	139	148	161	172	172	144	153	167	178		
1400	MBh	39.5	40.3	42.2	45.0	45.0	38.6	39.3	41.2	44.0	44.0	37.7	38.4	40.2	42.9	42.9	36.8	37.5	39.2	41.9	41.9	34.9	35.6	37.3	39.8	39.8	32.3	33.0	34.5	36.8	
	S/T	0.98	0.94	0.85	0.69	0.69	1.00	0.98	0.88	0.72	0.72	1.00	1.00	0.90	0.73	0.73	1.00	1.00	0.93	0.76	0.76	1.00	1.00	0.97	0.79	0.79	1.00	1.00	0.98	0.79	
	ΔT	25	25	24	20	20	25	25	24	21	21	25	25	24	21	21	24	25	24	21	21	23	23	24	21	21	22	22	22	19	
	kW	2.38	2.43	2.50	2.58	2.58	2.55	2.61	2.69	2.77	2.77	2.71	2.76	2.85	2.94	2.94	2.84	2.90	2.99	3.09	3.09	2.96	3.02	3.12	3.22	3.22	3.06	3.12	3.22	3.33	
	Amps	9.1	9.4	9.7	10.0	10.0	9.9	10.1	10.4	10.8	10.8	10.7	11.0	11.3	11.8	11.8	11.4	11.7	12.1	12.6	12.6	12.2	12.5	12.9	13.4	13.4	12.9	13.2	13.7	14.2	
	Hi PR	231	249	263	274	274	259	279	295	307	307	295	317	335	350	350	336	362	382	398	398	378	407	430	448	448	418	449	475	495	
Lo PR	118	126	137	146	146	125	133	145	155	155	130	138	151	161	161	137	145	159	169	169	143	152	166	177	177	148	157	172	183		
1575	MBh	40.7	41.5	43.5	46.4	46.4	39.8	40.5	42.4	45.3	45.3	38.8	39.6	41.4	44.2	44.2	37.9	38.6	40.4	43.1	43.1	36.0	36.7	38.4	41.0	41.0	33.3	34.0	35.6	37.9	
	S/T	1.00	0.99	0.89	0.72	0.72	1.00	1.00	0.92	0.75	0.75	1.00	1.00	0.95	0.77	0.77	1.00	1.00	0.98	0.79	0.79	1.00	1.00	0.97	0.82	0.82	1.00	1.00	0.98	0.83	
	ΔT	24	24	23	20	20	23	24	23	20	20	23	23	23	20	20	22	23	23	20	20	21	21	21	22	20	19	20	21	18	
	kW	2.40	2.45	2.52	2.60	2.60	2.57	2.63	2.71	2.79	2.79	2.73	2.79	2.87	2.96	2.96	2.86	2.93	3.02	3.11	3.11	2.98	3.04	3.14	3.24	3.24	3.08	3.15	3.25	3.35	
	Amps	9.2	9.4	9.7	10.1	10.1	10.0	10.2	10.5	10.9	10.9	10.8	11.1	11.4	11.9	11.9	11.5	11.8	12.2	12.7	12.7	12.3	12.6	13.0	13.5	13.5	13.0	13.3	13.8	14.3	
	Hi PR	233	251	265	277	277	262	282	298	310	310	298	321	339	353	353	339	365	386	402	402	382	411	434	452	452	422	454	479	500	
Lo PR	120	127	139	148	148	126	134	147	156	156	131	140	152	162	162	138	147	160	171	171	145	154	168	179	179	149	159	174	185		

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX160481B\* / CA\*F4860\*6D\* +TXV

Table with columns for Outdoor Ambient Temperature (65°F to 115°F) and Indoor Wet Bulb Temperature (75°F to 105°F). Rows include IDB, Airflow (MBh, S/T, ΔT, kW), Amps, and Lo PR for cooling capacities 70, 1350, and 1750.

Table with columns for Outdoor Ambient Temperature (65°F to 115°F) and Indoor Wet Bulb Temperature (75°F to 105°F). Rows include IDB, Airflow (MBh, S/T, ΔT, kW), Amps, and Lo PR for cooling capacities 75, 1350, and 1750. Includes shaded cells for efficiency and kW values.

IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction service valves. Shaded area reflects ACCA (TVA) conditions kW = Total system power Amps = outdoor unit amps (comp. + fan)



### EXPANDED COOLING DATA — SSX160481B\* / CA\*F4860\*6D\* +TXV (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.46	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57
	S/T	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	22	22	19	15	20	21	18	14
	kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21
1750	Amps	11.1	11.4	11.9	12.3	12.1	12.5	12.9	13.4	13.3	13.7	14.1	14.7	14.3	14.7	15.2	15.8	15.3	15.7	16.3	16.9	16.3	16.7	17.3	18.0
	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	465	484
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3
1550	S/T	0.89	0.84	0.68	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15
	kW	3.02	3.07	3.16	3.26	3.23	3.29	3.39	3.49	3.42	3.49	3.59	3.70	3.58	3.66	3.77	3.89	3.73	3.80	3.92	4.04	3.85	3.93	4.05	4.18
	Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.8	13.3	13.2	13.5	14.0	14.6	14.2	14.5	15.1	15.7	15.2	15.6	16.1	16.8	16.1	16.6	17.2	17.9
1350	Hi PR	224	241	255	266	251	271	286	298	286	308	325	339	326	350	370	386	366	394	416	434	405	436	460	480
	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169
	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9
	S/T	0.86	0.81	0.66	0.49	0.89	0.83	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.92	0.75	0.56
85	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	25	24	21	16	23	22	19	15
	kW	2.95	3.01	3.09	3.18	3.16	3.22	3.31	3.41	3.34	3.41	3.51	3.62	3.50	3.57	3.68	3.80	3.64	3.71	3.83	3.95	3.76	3.83	3.95	4.08
	Amps	10.7	11.0	11.4	11.8	11.7	12.0	12.4	12.9	12.8	13.1	13.6	14.1	13.7	14.1	14.6	15.2	14.7	15.1	15.6	16.3	15.6	16.1	16.6	17.3
	Hi PR	217	234	247	258	244	262	277	289	277	298	315	329	316	340	359	374	355	382	404	421	393	422	446	465
1750	Lo PR	106	112	123	131	112	119	130	138	116	123	135	144	122	130	142	151	128	136	148	158	132	141	154	163
	MBh	47.47	48.39	50.68	54.07	46.37	47.26	49.50	52.81	45.26	46.14	48.32	51.55	44.16	45.01	47.14	50.29	41.95	42.76	44.79	47.78	38.86	39.61	41.49	44.26
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79
	ΔT	24	24	23	20	24	24	23	20	24	24	23	20	23	24	23	20	22	22	23	20	20	21	21	18
1550	kW	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.71	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25
	Amps	11.3	11.6	12.0	12.5	12.3	12.6	13.0	13.6	13.4	13.8	14.3	14.9	14.4	14.8	15.4	16.0	15.5	15.9	16.4	17.1	16.5	16.9	17.5	18.2
	Hi PR	229	246	260	271	256	276	291	304	292	314	331	346	332	357	377	394	374	402	425	443	413	444	469	489
	Lo PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172
1350	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.93	0.75	1.00	1.00	0.93	0.76
	ΔT	26	25	24	21	26	25	24	21	26	25	24	21	25	26	24	21	24	25	24	21	22	23	22	19
	kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21
85	Amps	11.1	11.4	11.9	12.3	12.1	12.5	12.9	13.4	13.3	13.7	14.1	14.7	14.3	14.7	15.2	15.8	15.3	15.7	16.3	16.9	16.3	16.7	17.3	18.0
	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	465	484
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7
1750	S/T	0.90	0.87	0.78	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.90	0.73
	ΔT	26	26	24	21	26	26	25	21	26	26	25	21	27	26	25	21	26	26	24	21	24	24	23	20
	kW	2.97	3.03	3.12	3.21	3.18	3.24	3.34	3.44	3.36	3.43	3.54	3.65	3.53	3.60	3.71	3.83	3.67	3.74	3.86	3.98	3.79	3.86	3.99	4.11
	Amps	10.8	11.1	11.5	12.0	11.8	12.1	12.5	13.0	12.9	13.2	13.7	14.3	13.9	14.2	14.8	15.4	14.8	15.2	15.8	16.4	15.8	16.2	16.8	17.5
85	Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	408	425	397	427	451	470
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.46	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57
	S/T	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	22	22	19	15	20	21	18	14
	kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21
1750	Amps	11.1	11.4	11.9	12.3	12.1	12.5	12.9	13.4	13.3	13.7	14.1	14.7	14.3	14.7	15.2	15.8	15.3	15.7	16.3	16.9	16.3	16.7	17.3	18.0
	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	465	484
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3
1550	S/T	0.89	0.84	0.68	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.								

EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1350	MBh	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.5	52.3	57.3	-	49.3	51.1	56.0	-	46.8	48.5	53.2	-	43.4	44.9	49.2	-	
		S/T	0.64	0.53	0.37	-	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.73	0.61	0.42	-	0.73	0.61	0.42	-	
		ΔT	23	20	15	-	23	20	15	-	23	20	15	-	23	20	15	-	23	20	15	-	22	19	14	-	
	1500	kW	3.46	3.53	3.63	-	3.71	3.79	3.91	-	3.94	4.02	4.15	-	4.14	4.23	4.36	-	4.31	4.40	4.55	-	4.46	4.55	4.70	-	
		Amps	13.2	13.5	14.0	-	14.3	14.6	15.1	-	15.5	15.9	16.4	-	16.6	17.0	17.6	-	17.6	18.1	18.7	-	18.7	19.2	19.8	-	
		Hi PR	222	239	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-	
	1700	Lo PR	115	122	134	-	122	129	141	-	126	134	147	-	133	141	154	-	139	148	162	-	144	153	167	-	
		MBh	53.8	55.7	61.1	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.3	54.0	-	44.0	45.6	50.0	-	
		S/T	0.66	0.55	0.38	-	0.69	0.57	0.40	-	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.76	0.63	0.44	-	
	75	1350	ΔT	22	19	14	-	22	19	14	-	22	19	15	-	22	19	15	-	22	19	14	-	20	18	13	-
			kW	3.50	3.57	3.68	-	3.76	3.84	3.96	-	3.99	4.08	4.21	-	4.20	4.29	4.43	-	4.37	4.47	4.61	-	4.52	4.62	4.77	-
			Amps	13.4	13.7	14.2	-	14.5	14.8	15.3	-	15.7	16.1	16.7	-	16.8	17.3	17.8	-	17.9	18.4	19.0	-	19.0	19.5	20.1	-
1500		Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-	
		Lo PR	117	125	136	-	124	132	144	-	129	137	149	-	135	144	157	-	141	151	164	-	146	156	170	-	
		MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	60.0	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-	
1700		S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-	
		kW	3.53	3.60	3.71	-	3.79	3.87	3.99	-	4.03	4.11	4.24	-	4.23	4.32	4.46	-	4.41	4.50	4.65	-	4.56	4.66	4.81	-	
75		1350	Amps	13.5	13.8	14.3	-	14.6	15.0	15.5	-	15.9	16.3	16.8	-	17.0	17.4	18.0	-	18.1	18.5	19.2	-	19.2	19.7	20.3	-
			Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	405	435	460	479
			Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	140	149	163	174	145	155	169	180
	1500	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.4	50.9	52.4	56.7	60.8	48.3	49.8	53.9	57.8	44.8	46.1	49.9	53.5	
		S/T	0.75	0.67	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.86	0.77	0.58	0.38	
		ΔT	25	23	19	13	25	23	19	13	26	23	19	13	26	24	19	13	25	23	19	13	24	22	18	12	
	1700	kW	3.53	3.60	3.71	3.83	3.79	3.87	3.99	4.12	4.03	4.11	4.24	4.38	4.23	4.32	4.46	4.61	4.41	4.50	4.65	4.80	4.56	4.66	4.81	4.97	
		Amps	13.5	13.8	14.3	14.8	14.6	15.0	15.5	16.1	15.9	16.3	16.8	17.5	17.0	17.4	18.0	18.7	18.1	18.5	19.2	19.9	19.2	19.7	20.3	21.1	
		Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488	
	1700	Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	136	145	158	169	143	152	166	177	148	157	172	183	
		MBh	56.3	58.0	62.8	67.4	55.0	56.6	61.3	65.8	53.7	55.3	59.9	64.2	52.4	53.9	58.4	62.7	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1	
		S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
1700	ΔT	24	22	18	13	24	22	18	13	24	22	18	13	24	23	18	13	24	22	18	13	23	21	17	12		
	kW	3.56	3.63	3.74	3.86	3.82	3.90	4.03	4.16	4.06	4.15	4.28	4.42	4.27	4.36	4.50	4.65	4.44	4.54	4.69	4.84	4.60	4.70	4.85	5.01		
	Amps	13.6	14.0	14.4	15.0	14.8	15.1	15.6	16.2	16.0	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.4	20.1	19.4	19.8	20.5	21.3		
1700	Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	427	446	416	447	472	493		
	Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185		

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

# EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F					75°F					85°F														
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75										
<b>80</b>	1350	MBh	54.8	56.0	59.8	64.0	53.5	54.7	58.5	62.5	52.3	53.4	57.1	61.0	51.0	52.1	55.7	59.5	48.4	49.5	52.9	56.5	44.9	45.9	49.0	52.4
		S/T	0.79	0.75	0.61	0.45	0.82	0.77	0.63	0.47	0.84	0.79	0.64	0.48	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.91	0.86	0.70	0.52
		ΔT	30	28	25	20	30	29	25	20	30	29	25	20	30	29	25	20	30	29	25	20	28	27	23	19
		kW	3.51	3.58	3.69	3.81	3.77	3.85	3.97	4.10	4.00	4.09	4.22	4.36	4.21	4.30	4.44	4.58	4.38	4.48	4.62	4.78	4.53	4.63	4.78	4.94
		Amps	13.4	13.8	14.2	14.7	14.5	14.9	15.4	16.0	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.4	19.0	19.8	19.1	19.5	20.2	21.0
	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	464	484	
	Lo PR	117	125	136	145	124	132	144	153	129	137	150	159	135	144	157	168	142	151	165	176	147	156	170	182	
	MBh	55.7	56.9	60.8	65.0	54.4	55.5	59.3	63.4	53.1	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.3	53.7	57.4	45.6	46.6	49.7	53.2	
	S/T	0.82	0.77	0.63	0.47	0.85	0.80	0.65	0.49	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.95	0.89	0.72	0.54	
	ΔT	28	27	23	19	28	27	24	19	28	27	24	19	29	27	24	19	28	27	24	19	26	25	22	18	
	kW	3.56	3.63	3.74	3.86	3.82	3.90	4.03	4.16	4.06	4.15	4.28	4.42	4.27	4.36	4.50	4.65	4.44	4.54	4.69	4.84	4.60	4.70	4.85	5.01	
Amps	13.6	14.0	14.4	15.0	14.8	15.1	15.6	16.2	16.0	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.4	20.1	19.4	19.8	20.5	21.3		
Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	428	446	416	447	472	493		
Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185		
MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.7	55.9	59.7	63.8	53.3	54.5	58.2	62.2	50.7	51.8	55.3	59.1	46.9	48.0	51.2	54.8		
S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.93	0.76	0.57		
ΔT	27	26	22	18	27	26	23	18	27	26	23	18	27	26	23	18	27	26	23	18	25	24	21	17		
kW	3.58	3.66	3.77	3.89	3.85	3.93	4.06	4.19	4.09	4.18	4.31	4.45	4.30	4.39	4.54	4.69	4.48	4.58	4.73	4.88	4.63	4.74	4.89	5.06		
Amps	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.1	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5		
Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498		
Lo PR	121	128	140	149	127	136	148	158	132	141	154	164	139	148	162	172	146	155	169	180	151	160	175	187		
<b>85</b>	1350	MBh	55.8	56.9	59.5	63.5	54.5	55.5	58.2	62.1	53.2	54.2	56.8	60.6	51.9	52.9	55.4	59.1	49.3	50.2	52.6	56.1	45.7	46.5	48.7	52.0
		S/T	0.83	0.80	0.73	0.59	0.86	0.83	0.75	0.61	0.89	0.85	0.77	0.63	0.91	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.96	0.92	0.83	0.68
		ΔT	32	31	29	25	32	32	30	26	32	32	30	26	32	32	30	26	32	31	30	26	30	29	28	24
		kW	3.54	3.61	3.72	3.84	3.80	3.88	4.00	4.13	4.04	4.12	4.25	4.39	4.24	4.33	4.47	4.62	4.42	4.51	4.66	4.82	4.57	4.67	4.82	4.98
		Amps	13.6	13.9	14.3	14.9	14.7	15.0	15.5	16.1	15.9	16.3	16.9	17.5	17.0	17.5	18.0	18.7	18.1	18.6	19.2	20.0	19.2	19.7	20.4	21.2
	Hi PR	228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	374	402	424	443	413	444	469	489	
	Lo PR	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	152	166	177	148	158	172	183	
	MBh	56.6	57.7	60.5	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.4	47.3	49.5	52.8	
	S/T	0.86	0.83	0.75	0.61	0.90	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.83	0.67	0.98	0.95	0.86	0.69	0.99	0.96	0.86	0.70	
	ΔT	30	29	28	24	30	30	28	24	30	30	28	24	31	30	28	25	30	30	28	24	28	28	26	23	
	kW	3.58	3.66	3.77	3.89	3.85	3.93	4.06	4.19	4.09	4.18	4.31	4.45	4.30	4.39	4.54	4.69	4.48	4.58	4.73	4.88	4.63	4.74	4.89	5.06	
Amps	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.1	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5		
Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498		
Lo PR	121	128	140	149	127	136	148	158	132	141	154	164	139	148	162	172	146	155	169	180	151	160	175	187		
MBh	58.3	59.5	62.3	66.4	57.0	58.1	60.8	64.9	55.6	56.7	59.4	63.3	54.3	55.3	57.9	61.8	51.5	52.5	55.0	58.7	47.7	48.7	51.0	54.4		
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.73		
ΔT	29	28	27	23	29	28	27	23	29	28	27	23	29	29	27	23	28	28	27	23	26	26	25	22		
kW	3.61	3.69	3.80	3.92	3.88	3.97	4.09	4.22	4.12	4.21	4.35	4.49	4.34	4.43	4.57	4.73	4.52	4.62	4.77	4.93	4.67	4.78	4.93	5.10		
Amps	13.9	14.2	14.7	15.3	15.0	15.4	15.9	16.5	16.3	16.7	17.3	18.0	17.5	17.9	18.5	19.2	18.6	19.1	19.7	20.5	19.7	20.2	20.9	21.7		
Hi PR	235	253	267	278	263	283	299	312	300	322	340	355	341	367	388	404	384	413	436	455	424	456	482	503		
Lo PR	122	130	142	151	129	137	150	159	134	142	155	165	141	150	163	174	147	157	171	182	152	162	177	188		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVAA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

**EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV/MBVC2000\*\***

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												75°F	ENTERING INDOOR WET BULB TEMPERATURE																			
		65°F				75°F				85°F					95°F				105°F				115°F											
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
70	1350	MBh	54.6	56.6	62.1	-	53.4	55.3	60.6	-	52.1	54.0	59.2	-	50.8	52.7	57.7	-	48.3	50.1	54.8	-	44.7	46.4	50.8	-	48.3	50.1	54.8	-	44.7	46.4	50.8	-
		S/T	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.75	0.62	0.43	-	0.75	0.62	0.43	-	0.75	0.62	0.43	-
		ΔT	24	21	16	-	25	21	16	-	25	21	16	-	25	21	16	-	25	21	16	-	25	21	16	-	25	21	16	-	25	21	16	-
		kW	3.26	3.33	3.43	-	3.51	3.59	3.71	-	3.74	3.82	3.95	-	3.94	4.03	4.16	-	4.11	4.20	4.35	-	4.26	4.35	4.50	-	4.11	4.20	4.35	-	4.26	4.35	4.50	-
	1500	Amps	13.2	13.5	14.0	-	14.3	14.6	15.1	-	15.5	15.9	16.4	-	16.6	17.0	17.6	-	17.6	18.1	18.7	-	18.7	19.2	19.8	-	17.6	18.1	18.7	-	18.7	19.2	19.8	-
		Hi PR	222	239	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-	362	390	412	-	400	431	455	-
		Lo PR	115	122	134	-	122	129	141	-	126	134	147	-	133	141	154	-	139	148	162	-	144	153	167	-	139	148	162	-	144	153	167	-
		MBh	55.5	57.5	63.0	-	54.2	56.2	61.5	-	52.9	54.8	60.1	-	51.6	53.5	58.6	-	49.0	50.8	55.7	-	45.4	47.1	51.6	-	49.0	50.8	55.7	-	45.4	47.1	51.6	-
1700	S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-	
	ΔT	23	20	15	-	23	20	15	-	23	20	15	-	24	20	16	-	23	20	15	-	22	19	14	-	23	20	15	-	22	19	14	-	
	kW	3.30	3.37	3.48	-	3.56	3.64	3.76	-	3.79	3.88	4.01	-	4.00	4.09	4.23	-	4.17	4.27	4.41	-	4.32	4.42	4.57	-	4.17	4.27	4.41	-	4.32	4.42	4.57	-	
	Amps	13.4	13.7	14.2	-	14.5	14.9	15.3	-	15.8	16.1	16.7	-	16.8	17.3	17.8	-	17.9	18.4	19.0	-	19.0	19.5	20.1	-	17.9	18.4	19.0	-	19.0	19.5	20.1	-	
1350	Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-	369	397	419	-	407	438	463	-	
	Lo PR	117	125	136	-	124	132	144	-	129	137	149	-	135	144	157	-	141	151	164	-	146	156	170	-	141	151	164	-	146	156	170	-	
	MBh	57.1	59.2	64.9	-	55.8	57.8	63.4	-	54.5	56.5	61.9	-	53.2	55.1	60.4	-	50.5	52.3	57.3	-	46.8	48.5	53.1	-	50.5	52.3	57.3	-	46.8	48.5	53.1	-	
	S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
1350	ΔT	22	19	14	-	22	19	15	-	22	19	15	-	22	19	15	-	22	19	15	-	22	18	14	-	22	19	15	-	22	18	14	-	
	kW	3.33	3.40	3.51	-	3.59	3.67	3.79	-	3.83	3.91	4.04	-	4.03	4.12	4.26	-	4.21	4.30	4.45	-	4.36	4.46	4.61	-	4.21	4.30	4.45	-	4.36	4.46	4.61	-	
	Amps	13.5	13.9	14.3	-	14.6	15.0	15.5	-	15.9	16.3	16.8	-	17.0	17.4	18.0	-	18.1	18.5	19.2	-	19.2	19.6	20.3	-	18.1	18.5	19.2	-	19.2	19.6	20.3	-	
	Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	405	435	460	479	366	394	416	434	405	435	460	479	
1500	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	140	149	163	174	145	155	169	180	140	149	163	174	145	155	169	180	
	MBh	56.4	58.1	62.9	67.5	55.1	56.7	61.4	65.9	53.8	55.4	59.9	64.3	52.5	54.0	58.5	62.8	49.9	51.3	55.6	59.6	46.2	47.5	51.5	55.2	49.9	51.3	55.6	59.6	46.2	47.5	51.5	55.2	
	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.73	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39	
	ΔT	27	25	20	14	27	25	20	14	27	25	20	14	27	25	21	14	27	25	20	14	25	23	19	13	27	25	20	14	25	23	19	13	
1700	kW	3.33	3.40	3.51	3.63	3.59	3.67	3.79	3.92	3.83	3.91	4.04	4.18	4.03	4.12	4.26	4.41	4.21	4.30	4.45	4.60	4.36	4.46	4.61	4.77	4.21	4.30	4.45	4.60	4.36	4.46	4.61	4.77	
	Amps	13.5	13.9	14.3	14.9	14.6	15.0	15.5	16.1	15.9	16.3	16.8	17.5	17.0	17.4	18.0	18.7	18.1	18.5	19.2	19.9	19.2	19.6	20.3	21.1	18.1	18.5	19.2	19.9	19.2	19.6	20.3	21.1	
	Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488	372	401	423	441	412	443	468	488	
	Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	136	145	158	169	143	152	166	177	148	157	172	183	143	152	166	177	148	157	172	183	
1350	MBh	58.1	59.8	64.8	69.5	56.8	58.4	63.3	67.9	55.4	57.0	61.7	66.3	54.1	55.7	60.2	64.7	51.4	52.9	57.2	61.4	47.6	49.0	53.0	56.9	51.4	52.9	57.2	61.4	47.6	49.0	53.0	56.9	
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.93	0.83	0.63	0.41	0.92	0.83	0.62	0.40	0.93	0.83	0.63	0.41	
	ΔT	25	23	19	13	26	24	19	13	26	24	19	13	26	24	20	14	26	24	19	13	24	22	18	12	26	24	19	13	24	22	18	12	
	kW	3.36	3.43	3.54	3.66	3.62	3.70	3.83	3.96	3.86	3.95	4.08	4.22	4.07	4.16	4.30	4.45	4.24	4.34	4.49	4.64	4.40	4.50	4.65	4.81	4.24	4.34	4.49	4.64	4.40	4.50	4.65	4.81	
1500	Amps	13.7	14.0	14.5	15.0	14.8	15.1	15.6	16.2	16.1	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.3	20.1	19.4	19.8	20.5	21.3	18.3	18.7	19.3	20.1	19.4	19.8	20.5	21.3	
	Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	427	446	416	447	472	493	376	405	427	446	416	447	472	493	
	Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185	144	154	168	179	149	159	173	185	
	MBh	55.6	57.2	61.9	66.5	54.3	55.9	60.5	64.9	53.0	54.6	59.0	63.4	51.7	53.2	57.6	61.8	49.1	50.6	54.7	58.7	45.5	46.8	50.7	54.4	49.1	50.6	54.7	58.7	45.5	46.8	50.7	54.4	
1700	S/T	0.75	0.67	0.50	0.32	0.77	0.69	0.52	0.34	0.79	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.86	0.77	0.58	0.37	0.85	0.76	0.57	0.37	0.86	0.77	0.58	0.37	
	ΔT	28	26	21	15	29	26	22	15	29	26	22	15	29	27	22	15	28	26	21	15	27	25	21	14	28	26	21	15	27	25	21	14	
	kW	3.28	3.35	3.46	3.58	3.54	3.62	3.74	3.87	3.77	3.86	3.98	4.12	3.97	4.06	4.20	4.34	4.15	4.24	4.38	4.54	4.29	4.39	4.54	4.70	4.15	4.24	4.38	4.54	4.29	4.39	4.54	4.70	
	Amps	13.3	13.7	14.1	14.6	14.4	14.8	15.3	15.8	15.7	16.0	16.6	17.2	16.7	17.1	17.7	18.4	17.8	18.3	18.9	19.6	18.9	19.3	20.0	20.8	17.8	18.3	18.9	19.6	18.9	19.3	20.0	20.8	
1350	Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	405	435	460	479	366	394	416	434	405	435	460	479	
	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	140	149	163	174	145	155	169	180									



AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0241B*	ASPF313716E*+TXV		24,000	16,800	16.0	13.0	800	4355457
	AVPTC313714A*		24,000	16,800	16.0	13.0	825	4431252
	CA*F3636*6D*+EEP+TXV		23,400	16,400	15.0	12.2	825	4392797
	CA*F3636*6D*+MBVC1600**-1A*+TXV		24,000	16,800	16.0	13.2	800	4392798
	CA*F3636*6D*+TXV	GME950603BXA*	23,600	16,500	15.5	12.5	800	4703692
	CA*F3636*6D*+TXV	GME950403BXA*	24,000	16,800	16.0	13.2	825	4701058
	CA*F3636*6D*+TXV	G*VC950453BXB*	24,000	16,800	16.0	13.2	825	5621767
	CA*F3636*6D*+TXV	A*VC950453BXB*	24,000	16,800	16.0	13.2	825	5621766
	CA*F3636*6D*+TXV	A*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621799
	CA*F3636*6D*+TXV	G*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621800
	CA*F3636*6D*+TXV	G*E80603B*B*	24,000	16,800	16.0	13.0	860	5038956
	CA*F3636*6D*+TXV	A*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621769
	CA*F3636*6D*+TXV	G*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621779
	CA*F3636*6D*+TXV	A*VM960603BXB*	24,000	16,800	16.0	13.2	825	5621796
	CA*F3636*6D*+TXV	A*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621778
	CA*F3636*6D*+TXV	G*VM960603BXB*	24,000	16,800	16.0	13.2	825	5621797
	CA*F3636*6D*+TXV	G*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621770
	CA*F3642*6D*+TXV	GME950603BXA*	23,600	16,500	16.0	13.2	800	4703694
	CA*F3642*6D*+TXV	G*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621781
	CA*F3642*6D*+TXV	A*VC950915DXB*	24,000	16,800	16.0	13.2	800	5621792
	CA*F3642*6D*+TXV	A*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621801
	CA*F3642*6D*+TXV	A*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621780
	CA*F3642*6D*+TXV	G*VC80805C*B*	24,000	16,800	16.0	13.0	810	5039131
	CA*F3642*6D*+TXV	A*VC80805C*B*	24,000	16,800	16.0	13.0	810	5038959
	CA*F3642*6D*+TXV	ADVC80805C*B*	24,000	16,800	16.0	13.0	810	5039132
	CA*F3642*6D*+TXV	A*VC950905CXB*	24,000	16,800	16.0	13.0	800	5621784
	CA*F3642*6D*+TXV	A*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621771
	CA*F3642*6D*+TXV	G*VC950905CXB*	24,000	16,800	16.0	13.0	800	5621785
	CA*F3642*6D*+TXV	A*VC950905DXB*	24,000	16,800	16.0	13.2	800	5621788
	CA*F3642*6D*+TXV	A*VM960805CXB*	24,000	16,800	16.0	13.0	800	5621809
	CA*F3642*6D*+TXV	A*VM960805DXB*	24,000	16,800	16.0	13.2	800	5621813
	CA*F3642*6D*+TXV	G*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621772
	CA*F3642*6D*+TXV	G*VC950905DXB*	24,000	16,800	16.0	13.2	800	5621789
	CA*F3642*6D*+TXV	G*VC950915DXB*	24,000	16,800	16.0	13.2	800	5621793
	CA*F3642*6D*+TXV	G*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621802
	CA*F3642*6D*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039040
	CA*F3642*6D*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039133
	CA*F3642*6D*+TXV	G*VM960805CXB*	24,000	16,800	16.0	13.0	800	5621810
	CA*F3642*6D*+TXV	G*VM960805DXB*	24,000	16,800	16.0	13.2	800	5621814
	CA*F3743*6D*+TXV	GME950603BXA*	23,600	16,500	16.0	13.2	800	4703696
	CA*F3743*6D*+TXV	ADVC80805C*B*	24,000	16,800	16.0	13.0	810	5038958
	CA*F3743*6D*+TXV	G*VC80805C*B*	24,000	16,800	16.0	13.0	810	5038957
	CA*F3743*6D*+TXV	A*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621782
	CA*F3743*6D*+TXV	G*VM960805DXB*	24,000	16,800	16.0	13.2	800	5621816
	CA*F3743*6D*+TXV	A*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621773
	CA*F3743*6D*+TXV	G*VC950714CXB*	24,000	16,800	16.0	13.2	825	5621783
CA*F3743*6D*+TXV	A*VC950915DXB*	24,000	16,800	16.0	13.2	800	5621794	
CA*F3743*6D*+TXV	G*VC950915DXB*	24,000	16,800	16.0	13.2	800	5621795	
CA*F3743*6D*+TXV	G*VM960805CXB*	24,000	16,800	16.0	13.0	800	5621812	
CA*F3743*6D*+TXV	G*VC950905DXB*	24,000	16,800	16.0	13.2	800	5621791	
CA*F3743*6D*+TXV	A*VC80805C*B*	24,000	16,800	16.0	13.0	810	5039134	
CA*F3743*6D*+TXV	G*VC950905CXB*	24,000	16,800	16.0	13.0	800	5621787	
CA*F3743*6D*+TXV	A*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621803	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0241B* (cont.)	CA*F3743*6D*+TXV	G*VM960604CXB*	24,000	16,800	16.0	13.2	825	5621804
	CA*F3743*6D*+TXV	A*VC950905DXB*	24,000	16,800	16.0	13.2	800	5621790
	CA*F3743*6D*+TXV	A*VM960805CXB*	24,000	16,800	16.0	13.0	800	5621811
	CA*F3743*6D*+TXV	G*VC950704CXB*	24,000	16,800	16.0	13.2	825	5621774
	CA*F3743*6D*+TXV	A*VM960805DXB*	24,000	16,800	16.0	13.2	800	5621815
	CA*F3743*6D*+TXV	A*VC950905CXB*	24,000	16,800	16.0	13.0	800	5621786
	CHPF3636B6C*+EEP+TXV		23,000	16,100	14.5	12.0	800	3586356
	CHPF3636B6C*+MBVC1200**-1A*+TXV		24,000	16,800	16.0	13.2	800	3609495
	CHPF3636B6C*+TXV	A*VM960604CXB*	24,000	16,800	16.0	13.2	750	5621805
	CHPF3636B6C*+TXV	G*E80603B*B*	24,600	17,200	16.0	13.0	860	5038857
	CHPF3636B6C*+TXV	G*VM960604CXB*	24,000	16,800	16.0	13.2	750	5621806
	CHPF3642C6C*+TXV	GME950403BXA*	24,000	16,800	15.0	13.0	825	4701110
	CHPF3642C6C*+TXV	G*VC950704CXB*	24,000	16,800	16.0	13.5	750	5621776
	CHPF3642C6C*+TXV	A*VC81005C*B*	24,000	16,800	16.0	13.0	810	5038838
	CHPF3642C6C*+TXV	G*VC81005C*B*	24,000	16,800	16.0	13.0	810	5039158
	CHPF3642C6C*+TXV	GME950603BXA*	23,800	16,700	15.5	13.0	800	4703698
	CHPF3642C6C*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039041
	CHPF3642C6C*+TXV	G*VC950453BXB*	24,000	16,800	15.0	13.0	825	5621768
	CHPF3642C6C*+TXV	A*VC950704CXB*	24,000	16,800	16.0	13.5	750	5621775
	CHPF3642C6C*+TXV	G*VM960603BXB*	24,000	16,800	15.0	13.0	825	5621798
	CHPF3642C6C*+TXV	A*VM960604CXB*	24,000	16,800	16.0	13.5	750	5621807
	CHPF3642C6C*+TXV	G*VM960604CXB*	24,000	16,800	16.0	13.5	750	5621808
	CHPF3642C6C*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039157
CHPF3743C6B*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039135	
CHPF3743C6B*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	820	5039159	
CSCF3642N6D*+TXV	G*VC950704CXB*	24,000	16,800	16.0	13.0	875	5621777	
SSX16 0301A*	ASPF313716E*+TXV		29,000	22,000	16.0	13.0	1,000	4355458
	AVPTC313714A*		29,000	22,000	16.0	13.0	1,000	4431254
	CA*F3642*6D*+EEP+TXV		28,800	21,800	14.5	12.2	1,000	4482928
	CA*F3642*6D*+MBVC1600**-1A*+TXV		29,000	22,000	16.0	13.0	1,000	3880068
	CA*F3642*6D*+TXV	GME950403BXA*	28,600	21,800	15.0	12.5	1,020	4701061
	CA*F3642*6D*+TXV	G*VC80805C*B*	27,800	21,200	15.0	12.5	990	5039069
	CA*F3642*6D*+TXV	G*VC81005C*B*	28,400	21,600	15.5	12.7	1,060	5039086
	CA*F3642*6D*+TXV	G*E80603B*B*	28,400	21,600	15.0	12.5	1,050	5038897
	CA*F3642*6D*+TXV	A*VC81005C*B*	28,400	21,600	15.5	12.7	1,060	5039217
	CA*F3642*6D*+TXV	A*VC80604B*B*	28,600	21,800	15.0	12.5	1,070	5039273
	CA*F3642*6D*+TXV	GME950603BXA*	28,400	21,600	15.0	12.5	1,000	4703701
	CA*F3642*6D*+TXV	A*VM960603BXB*	28,600	21,800	15.0	12.5	1,020	5621882
	CA*F3642*6D*+TXV	A*VM960805CXB*	28,800	21,800	15.5	12.7	1,050	5621904
	CA*F3642*6D*+TXV	G*VC950453BXB*	28,800	21,800	15.0	12.5	1,020	5621818
	CA*F3642*6D*+TXV	G*VC951155DXB*	28,600	21,800	15.0	12.5	1,020	5621874
	CA*F3642*6D*+TXV	A*VM960604CXB*	28,600	21,800	15.0	12.5	1,020	5621893
	CA*F3642*6D*+TXV	G*VM960805DXB*	28,600	21,800	16.0	13.0	1,050	5621915
	CA*F3642*6D*+TXV	A*VM961155DXB*	28,600	21,800	15.0	12.5	1,020	5621933
	CA*F3642*6D*+TXV	A*VC950453BXB*	28,600	21,800	15.0	12.5	1,020	5621817
	CA*F3642*6D*+TXV	A*VC950905CXB*	28,800	21,800	15.5	12.7	1,050	5621847
	CA*F3642*6D*+TXV	ADV80805C*B*	27,800	21,200	15.0	12.5	990	5038916
	CA*F3642*6D*+TXV	ADV81005C*B*	27,800	21,200	15.5	12.7	1,010	5039056
	CA*F3642*6D*+TXV	A*VC80805C*B*	27,800	21,200	15.0	12.5	990	5039062
	CA*F3642*6D*+TXV	G*VC80604B*B*	28,600	21,800	15.0	12.5	1,070	5039076
	CA*F3642*6D*+TXV	G*E81005C*B*	28,800	21,800	15.0	12.5	1,080	5039136
	CA*F3642*6D*+TXV	G*VC950905CXB*	28,800	21,800	15.5	12.7	1,050	5621848
	CA*F3642*6D*+TXV	A*VC950905DXB*	28,800	21,800	16.0	13.0	1,050	5621858

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0301A* (cont.)	CA*F3642*6D*+TXV	G*VM960805CXB*	28,800	21,800	15.5	12.7	1,050	5621905
	CA*F3642*6D*+TXV	A*VC950704CXB*	28,600	21,800	15.0	12.5	1,020	5621828
	CA*F3642*6D*+TXV	A*VC950714CXB*	28,600	21,800	15.0	12.5	1,020	5621841
	CA*F3642*6D*+TXV	G*VC950714CXB*	28,600	21,800	15.0	12.5	1,020	5621842
	CA*F3642*6D*+TXV	A*VC950915DXB*	28,800	21,800	16.0	13.0	1,050	5621867
	CA*F3642*6D*+TXV	G*VC950905DXB*	28,600	21,800	16.0	13.0	1,050	5621859
	CA*F3642*6D*+TXV	G*VM960603BXB*	28,800	21,800	15.0	12.5	1,020	5621883
	CA*F3642*6D*+TXV	G*VM961005DXB*	28,600	21,800	15.0	12.5	1,020	5621925
	CA*F3642*6D*+TXV	G*VM961155DXB*	28,600	21,800	15.0	12.5	1,020	5621934
	CA*F3642*6D*+TXV	G*VC950704CXB*	28,600	21,800	15.0	12.5	1,020	5621829
	CA*F3642*6D*+TXV	A*VC951155DXB*	28,600	21,800	15.0	12.5	1,020	5621873
	CA*F3642*6D*+TXV	A*VM960805DXB*	28,800	21,800	16.0	13.0	1,050	5621914
	CA*F3642*6D*+TXV	G*E80805C*B*	28,400	21,600	15.0	12.5	1,060	5038915
	CA*F3642*6D*+TXV	G*VC950915DXB*	28,600	21,800	16.0	13.0	1,050	5621868
	CA*F3642*6D*+TXV	G*VM960604CXB*	28,600	21,800	15.0	12.5	1,020	5621894
	CA*F3642*6D*+TXV	A*VM961005DXB*	28,600	21,800	15.0	12.5	1,020	5621924
	CA*F3743*6D*+MBVC1600**-1A*+TXV		28,800	21,800	16.0	13.0	1,050	4415112
	CA*F3743*6D*+TXV	G*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5038887
	CA*F3743*6D*+TXV	A*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5039190
	CA*F3743*6D*+TXV	GME950403BXA*	28,800	21,800	15.0	12.5	1,020	4701072
	CA*F3743*6D*+TXV	GME950603BXA*	28,600	21,800	15.0	12.5	1,000	4703703
	CA*F3743*6D*+TXV	A*VC950905CXB*	28,800	21,800	16.0	13.0	1,050	5621849
	CA*F3743*6D*+TXV	G*VM960805DXB*	28,800	21,800	16.0	13.0	1,050	5621917
	CA*F3743*6D*+TXV	A*VM961155DXB*	28,800	21,800	16.0	13.0	1,020	5621935
	CA*F3743*6D*+TXV	A*VM961005DXB*	28,800	21,800	16.0	13.0	1,020	5621926
	CA*F3743*6D*+TXV	G*VM961155DXB*	28,800	21,800	16.0	13.0	1,020	5621936
	CA*F3743*6D*+TXV	G*VC950704CXB*	28,800	21,800	15.5	12.7	1,020	5621831
	CA*F3743*6D*+TXV	G*VC950915DXB*	28,800	21,800	16.0	13.0	1,050	5621870
	CA*F3743*6D*+TXV	ADV80805C*B*	27,800	21,200	15.5	12.7	990	5039070
	CA*F3743*6D*+TXV	G*VC81005C*B*	28,400	21,600	15.5	12.7	1,060	5039077
	CA*F3743*6D*+TXV	A*VC81005C*B*	28,400	21,600	15.5	12.7	1,060	5038903
	CA*F3743*6D*+TXV	G*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039206
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	21,800	15.0	12.5	1,080	5038839
	CA*F3743*6D*+TXV	G*E80603B*B*	28,400	21,600	15.0	12.5	1,050	5038985
	CA*F3743*6D*+TXV	A*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039072
	CA*F3743*6D*+TXV	G*E80805C*B*	28,400	21,600	15.0	12.5	1,060	5039267
	CA*F3743*6D*+TXV	A*VM960805DXB*	28,800	21,800	16.0	13.0	1,050	5621916
	CA*F3743*6D*+TXV	A*VC950704CXB*	28,800	21,800	15.5	12.7	1,020	5621830
	CA*F3743*6D*+TXV	G*VC950714CXB*	28,800	21,800	15.5	12.7	1,020	5621844
	CA*F3743*6D*+TXV	G*VC950905CXB*	28,800	21,800	16.0	13.0	1,050	5621850
	CA*F3743*6D*+TXV	G*VC950905DXB*	28,800	21,800	16.0	13.0	1,050	5621861
	CA*F3743*6D*+TXV	A*VC950915DXB*	28,800	21,800	16.0	13.0	1,050	5621869
	CA*F3743*6D*+TXV	A*VC951155DXB*	28,800	21,800	16.0	13.0	1,020	5621875
	CA*F3743*6D*+TXV	A*VM960604CXB*	28,800	21,800	15.5	12.7	1,020	5621895
	CA*F3743*6D*+TXV	G*VM960603BXB*	28,800	21,800	15.0	12.5	1,020	5621885
	CA*F3743*6D*+TXV	A*VM960805CXB*	28,800	21,800	16.0	13.0	1,050	5621906
	CA*F3743*6D*+TXV	G*VM960805CXB*	28,800	21,800	16.0	13.0	1,050	5621907
	CA*F3743*6D*+TXV	G*VM960604CXB*	28,800	21,800	15.5	12.7	1,020	5621896
	CA*F3743*6D*+TXV	A*VC950714CXB*	28,800	21,800	15.5	12.7	1,020	5621843
	CA*F3743*6D*+TXV	A*VC950905DXB*	28,800	21,800	16.0	13.0	1,050	5621860
CA*F3743*6D*+TXV	A*VM960603BXB*	28,800	21,800	15.0	12.5	1,020	5621884	
CA*F3743*6D*+TXV	G*VM961005DXB*	28,800	21,800	16.0	13.0	1,020	5621927	
CA*F3743*6D*+TXV	ADV81005C*B*	27,800	21,200	15.5	12.7	1,010	5039165	

See Notes on Page 53.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0301A* (cont.)	CA*F3743*6D*+TXV	A*VC950453BXB*	28,800	21,800	15.0	12.5	1,020	5621819
	CA*F3743*6D*+TXV	G*VC951155DXB*	28,800	21,800	16.0	13.0	1,020	5621876
	CAPT3743*4A*	A*VC80604B*B*	27,800	21,200	15.5	12.5	895	5520530
	CAPT3743*4A*	A*VC81005C*B*	28,400	21,600	15.5	12.5	900	5520532
	CAPT3743*4A*	G*VC80805C*B*	27,800	21,200	15.5	12.5	890	5520552
	CAPT3743*4A*	GME950603BXA*	28,600	21,800	15.0	12.5	925	5520571
	CAPT3743*4A*	ADVC81005C*B*	27,800	21,200	15.5	12.5	895	5520547
	CAPT3743*4A*	G*VC950915DXB*	28,800	21,800	16.0	13.0	900	5621872
	CAPT3743*4A*	G*VC950704CXB*	28,800	21,800	15.5	12.5	875	5621833
	CAPT3743*4A*	G*VC950905CXB*	28,800	21,800	16.0	13.0	900	5621852
	CAPT3743*4A*	A*VC950905DXB*	28,800	21,800	16.0	13.0	840	5621862
	CAPT3743*4A*	G*VM960805DXB*	28,800	21,800	16.0	13.0	900	5621919
	CAPT3743*4A*	G*E80603B*B*	28,400	21,600	15.0	12.5	945	5520548
	CAPT3743*4A*	A*VC80805C*B*	27,800	21,200	15.5	12.5	890	5520531
	CAPT3743*4A*	ADVC80805C*B*	27,800	21,200	15.5	12.5	880	5520546
	CAPT3743*4A*	G*VC80604B*B*	27,800	21,200	15.5	12.5	895	5520551
	CAPT3743*4A*	G*VC81005C*B*	28,400	21,600	15.5	12.5	900	5520554
	CAPT3743*4A*	A*VC950714CXB*	28,800	21,800	15.5	12.5	875	5621845
	CAPT3743*4A*	A*VC950905CXB*	28,800	21,800	16.0	13.0	900	5621851
	CAPT3743*4A*	A*VM960604CXB*	28,800	21,800	15.5	12.5	900	5621897
	CAPT3743*4A*	A*VM961155DXB*	28,800	21,800	16.0	13.0	895	5621937
	CAPT3743*4A*	A*VC950704CXB*	28,800	21,800	15.5	12.5	875	5621832
	CAPT3743*4A*	G*VC950714CXB*	28,800	21,800	15.5	12.5	875	5621846
	CAPT3743*4A*	G*VC950905DXB*	28,800	21,800	16.0	13.0	840	5621863
	CAPT3743*4A*	A*VM960603BXB*	28,800	21,800	15.0	12.5	900	5621886
	CAPT3743*4A*	A*VC950453BXB*	28,800	21,800	15.0	12.5	880	5621820
	CAPT3743*4A*	A*VC951155DXB*	28,800	21,800	16.0	13.0	895	5621877
	CAPT3743*4A*	A*VM960805DXB*	28,800	21,800	16.0	13.0	900	5621918
	CAPT3743*4A*	G*VM960604CXB*	28,800	21,800	15.5	12.5	900	5621898
	CAPT3743*4A*	A*VM960805CXB*	28,800	21,800	16.0	13.0	900	5621908
	CAPT3743*4A*	A*VM961005DXB*	28,800	21,800	16.0	13.0	895	5621928
	CAPT3743*4A*	A*VC950915DXB*	28,800	21,800	16.0	13.0	900	5621871
	CAPT3743*4A*	G*VC951155DXB*	28,800	21,800	16.0	13.0	895	5621878
	CAPT3743*4A*	G*VM960603BXB*	28,800	21,800	15.0	12.5	900	5621887
	CAPT3743*4A*	G*VM961155DXB*	28,800	21,800	16.0	13.0	895	5621938
	CAPT3743*4A*	G*E80805C*B*	28,400	21,600	15.0	12.5	945	5520549
	CAPT3743*4A*	G*E81005C*B*	28,800	21,800	15.0	12.5	945	5520550
	CAPT3743*4A*	GME950403BXA*	28,800	21,800	15.0	12.5	925	5520570
	CAPT3743*4A*	G*VM960805CXB*	28,800	21,800	16.0	13.0	900	5621909
	CAPT3743*4A*	G*VM961005DXB*	28,800	21,800	16.0	13.0	895	5621929
	CAPT3743*4A*+EEP		28,000	21,200	14.0	12.0	1,000	5611320
	CAPT3743*4A*+MBVC1600**-1A*		28,800	21,800	16.0	13.0	930	5527285
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,800	16.0	13.0	1,050	3835004
	CHPF3642C6C*+TXV	GME950403BXA*	28,800	21,800	15.0	12.5	1,020	4701109
	CHPF3642C6C*+TXV	G*VC80805C*B*	27,800	21,200	15.5	12.7	990	5038999
CHPF3642C6C*+TXV	GME950603BXA*	28,600	21,800	15.0	12.5	1,000	4703704	
CHPF3642C6C*+TXV	A*VM960603BXB*	28,800	21,800	15.0	12.5	1,020	5621888	
CHPF3642C6C*+TXV	G*E80603B*B*	28,400	21,600	15.0	12.5	1,050	5038917	
CHPF3642C6C*+TXV	A*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5039169	
CHPF3642C6C*+TXV	A*VC81005C*B*	27,800	21,200	15.5	12.7	1,000	5038875	
CHPF3642C6C*+TXV	A*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039081	
CHPF3642C6C*+TXV	G*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5039166	
CHPF3642C6C*+TXV	G*E80805C*B*	28,400	21,600	15.0	12.5	1,060	5039268	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0301A* (cont.)	CHPF3642C6C*+TXV	A*VC950453BXB*	28,800	21,800	15.0	12.5	1,020	5621821
	CHPF3642C6C*+TXV	A*VC950704CXB*	28,800	21,800	15.5	12.7	1,020	5621834
	CHPF3642C6C*+TXV	A*VM960604CXB*	28,800	21,800	15.5	12.7	1,020	5621899
	CHPF3642C6C*+TXV	G*VM960604CXB*	28,800	21,800	15.5	12.7	1,020	5621900
	CHPF3642C6C*+TXV	G*E81005C*B*	28,800	21,800	15.0	12.5	1,080	5038960
	CHPF3642C6C*+TXV	G*VC81005C*B*	27,800	21,200	15.5	12.7	1,000	5038976
	CHPF3642C6C*+TXV	G*VC950453BXB*	28,800	21,800	15.0	12.5	1,020	5621822
	CHPF3642C6C*+TXV	G*VC950704CXB*	28,800	21,800	15.5	12.7	1,020	5621835
	CHPF3642C6C*+TXV	G*VM960603BXB*	28,800	21,800	15.0	12.5	1,020	5621889
	CHPF3642D6C*+MBVC2000**-1A*+TXV		28,800	21,800	15.5	12.7	1,050	3835030
	CHPF3642D6C*+TXV	A*VC950905DXB*	28,800	21,800	16.0	13.0	1,050	5621864
	CHPF3642D6C*+TXV	A*VM961155DXB*	28,800	21,800	16.0	13.0	1,020	5621939
	CHPF3642D6C*+TXV	A*VM960805CXB*	28,800	21,800	16.0	13.0	1,050	5621910
	CHPF3642D6C*+TXV	A*VM961005DXB*	28,800	21,800	16.0	13.0	1,020	5621930
	CHPF3642D6C*+TXV	A*VC950905CXB*	28,800	21,800	16.0	13.0	1,050	5621853
	CHPF3642D6C*+TXV	A*VM960805DXB*	28,800	21,800	16.0	13.0	1,050	5621920
	CHPF3642D6C*+TXV	A*VC951155DXB*	28,800	21,800	16.0	13.0	1,020	5621879
	CHPF3743C6B*+MBVC1600**-1A*+TXV		29,000	22,000	16.0	13.0	1,050	3835037
	CHPF3743C6B*+MBVC2000**-1A*+TXV		29,000	22,000	16.0	13.0	1,050	3836954
	CHPF3743C6B*+TXV	GME950403BXA*	29,000	22,000	15.5	12.7	1,020	4701115
	CHPF3743C6B*+TXV	A*VC950453BXB*	29,000	22,000	15.5	12.7	1,020	5621823
	CHPF3743C6B*+TXV	A*VM961155DXB*	29,000	22,000	16.0	13.0	1,020	5621940
	CHPF3743C6B*+TXV	A*VC950704CXB*	29,000	22,000	16.0	13.0	1,020	5621836
	CHPF3743C6B*+TXV	A*VM960604CXB*	29,000	22,000	16.0	13.0	1,020	5621901
	CHPF3743C6B*+TXV	G*VM960604CXB*	29,000	22,000	16.0	13.0	1,020	5621902
	CHPF3743C6B*+TXV	A*VM960805DXB*	29,000	22,000	16.0	13.0	1,050	5621921
	CHPF3743C6B*+TXV	G*E81005C*B*	29,000	22,000	15.0	12.5	1,080	5038928
	CHPF3743C6B*+TXV	A*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5039057
	CHPF3743C6B*+TXV	G*VC80604B*B*	27,800	21,200	15.5	12.7	1,040	5039020
	CHPF3743C6B*+TXV	G*E80603B*B*	28,400	21,600	15.0	12.5	1,050	5039001
	CHPF3743C6B*+TXV	GME950603BXA*	28,800	21,800	16.0	13.0	1,000	4703705
	CHPF3743C6B*+TXV	A*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039002
	CHPF3743C6B*+TXV	A*VC81005C*B*	27,800	21,200	15.5	12.7	1,000	5039170
	CHPF3743C6B*+TXV	G*VC950453BXB*	29,000	22,000	15.5	12.7	1,020	5621824
	CHPF3743C6B*+TXV	A*VM960603BXB*	29,000	22,000	15.5	12.7	1,020	5621890
	CHPF3743C6B*+TXV	A*VM960805CXB*	29,000	22,000	16.0	13.0	1,050	5621911
	CHPF3743C6B*+TXV	A*VM961005DXB*	29,000	22,000	16.0	13.0	1,020	5621931
	CHPF3743C6B*+TXV	G*VC950704CXB*	29,000	22,000	16.0	13.0	1,020	5621837
	CHPF3743C6B*+TXV	A*VC950905CXB*	29,000	22,000	16.0	13.0	1,050	5621854
	CHPF3743C6B*+TXV	G*VM960603BXB*	29,000	22,000	15.5	12.7	1,020	5621891
	CHPF3743C6B*+TXV	G*VM960805CXB*	29,000	22,000	16.0	13.0	1,050	5621912
	CHPF3743C6B*+TXV	G*VM960805DXB*	29,000	22,000	16.0	13.0	1,050	5621922
	CHPF3743C6B*+TXV	G*VC950905CXB*	29,000	22,000	16.0	13.0	1,050	5621855
	CHPF3743C6B*+TXV	G*E80805C*B*	28,400	21,600	15.0	12.5	1,060	5039184
	CHPF3743C6B*+TXV	G*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039207
	CHPF3743C6B*+TXV	G*VC81005C*B*	27,800	21,200	15.5	12.7	1,000	5039257
	CHPF3743D6B*+TXV	G*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039071
	CHPF3743D6B*+TXV	GME950403BXA*	29,000	22,000	15.5	12.7	1,020	4701118
	CHPF3743D6B*+TXV	A*VC950704CXB*	29,000	22,000	16.0	13.0	1,020	5621838
	CHPF3743D6B*+TXV	A*VM960604CXB*	29,000	22,000	16.0	13.0	1,020	5621903
CHPF3743D6B*+TXV	A*VM960805DXB*	29,000	22,000	16.0	13.0	1,050	5621923	
CHPF3743D6B*+TXV	A*VM961155DXB*	29,000	22,000	16.0	13.0	1,020	5621941	
CHPF3743D6B*+TXV	A*VM960805CXB*	29,000	22,000	16.0	13.0	1,050	5621913	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0301A* (cont.)	CHPF3743D6B*+TXV	A*VC950905CXB*	29,000	22,000	16.0	13.0	1,050	5621856
	CHPF3743D6B*+TXV	A*VC80604B*B*	28,600	21,800	15.5	12.7	1,070	5039078
	CHPF3743D6B*+TXV	G*VC80604B*B*	28,600	21,800	15.5	12.7	1,070	5039272
	CHPF3743D6B*+TXV	A*VC80805C*B*	27,800	21,200	15.5	12.7	990	5039208
	CHPF3743D6B*+TXV	A*VC950453BXB*	29,000	22,000	15.5	12.7	1,020	5621825
	CHPF3743D6B*+TXV	A*VC950905DXB*	29,000	22,000	16.0	13.0	1,050	5621865
	CHPF3743D6B*+TXV	A*VC951155DXB*	29,000	22,000	16.0	13.0	1,020	5621880
	CHPF3743D6B*+TXV	A*VM960603BXB*	29,000	22,000	15.5	12.7	1,020	5621892
	CHPF3743D6B*+TXV	A*VM961005DXB*	29,000	22,000	16.0	13.0	1,020	5621932
	CHPF3743D6B*+TXV	GME950603BXA*	28,800	21,800	16.0	13.0	1,000	4703706
	CHPF4860D6D*+EEP+TXV		28,800	21,800	14.5	12.2	1,000	5361290
	CSCF3642N6D*+TXV	G*VC950453BXB*	29,000	22,000	15.5	12.7	1,000	5621827
	CSCF3642N6D*+TXV	G*VC950704CXB*	29,000	22,000	16.0	13.0	900	5621840
	CSCF3642N6D*+TXV	A*VC950704CXB*	28,800	21,800	16.0	13.0	900	5621839
	CSCF3642N6D*+TXV	A*VC950905CXB*	29,000	22,000	16.0	13.0	1,000	5621857
	CSCF3642N6D*+TXV	A*VC950453BXB*	28,800	21,800	15.5	12.7	1,000	5621826
CSCF3642N6D*+TXV	A*VC950905DXB*	29,000	22,000	16.0	13.0	1,000	5621866	
CSCF3642N6D*+TXV	A*VC951155DXB*	29,000	22,000	16.0	13.0	1,000	5621881	
SSX16 0361B*	ASPF426016E*+TXV		34,600	26,000	15.5	12.5	1,200	4358276
	AVPTC426014A*		34,600	26,000	16.0	13.0	1,225	4431263
	CA*F3636*6D*	A*VC80604B*B*	33,400	25,200	15.0	12.5	1,100	5325852
	CA*F3636*6D*	G*E80603B*B*	33,400	25,200	14.5	12.0	1,150	5325820
	CA*F3636*6D*	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,100	5325905
	CA*F3636*6D*	ADVC80805C*B*	33,400	25,200	15.0	12.5	1,100	5326215
	CA*F3636*6D*	A*VC950905DXB*	33,400	25,200	14.5	12.0	1,100	5622030
	CA*F3636*6D*	G*VC950905DXB*	33,400	25,200	14.5	12.0	1,100	5622031
	CA*F3636*6D*	G*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622111
	CA*F3636*6D*	G*VC950905CXB*	33,400	25,200	14.5	12.0	1,100	5621989
	CA*F3636*6D*	G*VM960805CXB*	33,400	25,200	14.5	12.0	1,100	5622153
	CA*F3636*6D*	G*VM961155DXB*	33,400	25,200	15.0	12.5	1,100	5622271
	CA*F3636*6D*	A*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621942
	CA*F3636*6D*	G*VC80805C*B*	33,400	25,200	15.0	12.5	1,100	5325872
	CA*F3636*6D*	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,100	5325904
	CA*F3636*6D*	G*E80805C*B*	33,400	25,200	15.0	12.5	1,150	5325827
	CA*F3636*6D*	GME950603BXA*	33,400	25,200	14.0	11.8	1,150	5326249
	CA*F3636*6D*	A*VC80805C*B*	33,400	25,200	15.0	12.5	1,100	5325871
	CA*F3636*6D*	G*E81005C*B*	33,400	25,200	15.0	12.5	1,150	5326294
	CA*F3636*6D*	A*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622110
	CA*F3636*6D*	A*VM960805CXB*	33,400	25,200	14.5	12.0	1,100	5622152
	CA*F3636*6D*	A*VC951155DXB*	33,400	25,200	15.0	12.5	1,100	5622070
	CA*F3636*6D*	G*VM960805DXB*	33,400	25,200	15.0	12.5	1,100	5622195
	CA*F3636*6D*	A*VC950905CXB*	33,400	25,200	14.5	12.0	1,100	5621988
	CA*F3636*6D*	A*VM961005DXB*	33,400	25,200	15.0	12.5	1,100	5622232
	CA*F3636*6D*	G*VC951155DXB*	33,400	25,200	15.0	12.5	1,100	5622071
	CA*F3636*6D*	G*VM961005DXB*	33,400	25,200	15.0	12.5	1,100	5622233
	CA*F3636*6D*	A*VM961155DXB*	33,400	25,200	15.0	12.5	1,100	5622270
	CA*F3636*6D*	G*VC80604B*B*	33,400	25,200	15.0	12.5	1,100	5325853
	CA*F3636*6D*	ADVC81005C*B*	33,400	25,200	15.0	12.5	1,100	5326232
	CA*F3636*6D*	GME950805CXA*	33,400	25,200	14.5	12.0	1,150	5326259
	CA*F3636*6D*	GME951005DXA*	33,400	25,200	14.5	12.5	1,150	5326276
CA*F3636*6D*	G*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621943	
CA*F3636*6D*	A*VM960805DXB*	33,400	25,200	15.0	12.5	1,100	5622194	
CA*F3636*6D*+EEP		33,400	25,200	14.0	11.8	1,100	5325782	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CA*F3636*6D*+EEP+TXV		33,400	25,200	14.0	11.8	1,100	5325783
	CA*F3636*6D*+MBVC1600**-1A*		33,400	25,200	15.0	12.5	1,100	5326904
	CA*F3636*6D*+MBVC1600**-1A*+TXV		33,400	25,200	15.5	12.5	1,100	5325784
	CA*F3636*6D*+MBVC2000**-1A*		33,400	25,200	15.0	12.5	1,100	5326905
	CA*F3636*6D*+MBVC2000**-1A*+TXV		33,400	25,200	15.5	12.5	1,100	5326906
	CA*F3636*6D*+TXV	A*VC80604B*B*	33,400	25,200	15.1	12.5	1,100	5325854
	CA*F3636*6D*+TXV	G*E80603B*B*	33,400	25,200	15.0	12.5	1,150	5325821
	CA*F3636*6D*+TXV	A*VC81005C*B*	33,400	25,200	15.1	12.5	1,100	5326305
	CA*F3636*6D*+TXV	ADVC80805C*B*	33,400	25,200	15.1	12.5	1,100	5326216
	CA*F3636*6D*+TXV	G*E81005C*B*	33,400	25,200	15.1	12.5	1,150	5326295
	CA*F3636*6D*+TXV	G*VC80805C*B*	33,400	25,200	15.1	12.5	1,100	5326304
	CA*F3636*6D*+TXV	G*VC81005C*B*	33,400	25,200	15.1	12.5	1,100	5326306
	CA*F3636*6D*+TXV	A*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621944
	CA*F3636*6D*+TXV	A*VC950905CXB*	33,400	25,200	15.0	12.5	1,100	5621990
	CA*F3636*6D*+TXV	G*VM960805CXB*	33,400	25,200	15.0	12.5	1,100	5622155
	CA*F3636*6D*+TXV	G*VM960805DXB*	33,400	25,200	15.1	12.5	1,100	5622197
	CA*F3636*6D*+TXV	A*VM961155DXB*	33,400	25,200	15.1	12.5	1,100	5622272
	CA*F3636*6D*+TXV	ADVC81005C*B*	33,400	25,200	15.1	12.5	1,100	5326233
	CA*F3636*6D*+TXV	GME950603BXA*	33,400	25,200	14.0	11.8	1,150	5326250
	CA*F3636*6D*+TXV	A*VC80805C*B*	33,400	25,200	15.1	12.5	1,100	5325873
	CA*F3636*6D*+TXV	GME951005DXA*	33,400	25,200	15.0	12.5	1,150	5326277
	CA*F3636*6D*+TXV	G*E80805C*B*	33,400	25,200	15.1	12.5	1,150	5325828
	CA*F3636*6D*+TXV	G*VC80604B*B*	33,400	25,200	15.1	12.5	1,100	5326303
	CA*F3636*6D*+TXV	GME950805CXA*	33,400	25,200	14.5	12.0	1,150	5326260
	CA*F3636*6D*+TXV	A*VC950905DXB*	33,400	25,200	15.0	12.5	1,100	5622032
	CA*F3636*6D*+TXV	G*VC950905DXB*	33,400	25,200	15.0	12.5	1,100	5622033
	CA*F3636*6D*+TXV	A*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622112
	CA*F3636*6D*+TXV	G*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622113
	CA*F3636*6D*+TXV	A*VM960805DXB*	33,400	25,200	15.1	12.5	1,100	5622196
	CA*F3636*6D*+TXV	G*VM961005DXB*	33,400	25,200	15.1	12.5	1,100	5622235
	CA*F3636*6D*+TXV	G*VC950905CXB*	33,400	25,200	15.0	12.5	1,100	5621991
	CA*F3636*6D*+TXV	G*VC951155DXB*	33,400	25,200	15.1	12.5	1,100	5622073
	CA*F3636*6D*+TXV	G*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621945
	CA*F3636*6D*+TXV	A*VM960805CXB*	33,400	25,200	15.0	12.5	1,100	5622154
	CA*F3636*6D*+TXV	A*VC951155DXB*	33,400	25,200	15.1	12.5	1,100	5622072
	CA*F3636*6D*+TXV	A*VM961005DXB*	33,400	25,200	15.1	12.5	1,100	5622234
	CA*F3636*6D*+TXV	G*VM961155DXB*	33,400	25,200	15.1	12.5	1,100	5622273
	CA*F3642*6D*	A*VC80604B*B*	33,400	25,200	15.1	12.5	1,100	5325855
	CA*F3642*6D*	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,100	5325906
	CA*F3642*6D*	GME950603BXA*	33,400	25,200	14.0	12.0	1,150	5326251
	CA*F3642*6D*	GME951005DXA*	33,400	25,200	15.0	12.5	1,150	5326278
	CA*F3642*6D*	ADVC81005C*B*	33,400	25,200	15.0	12.5	1,100	5326234
	CA*F3642*6D*	G*E81005C*B*	33,400	25,200	15.5	12.5	1,150	5326296
	CA*F3642*6D*	G*VC950905CXB*	33,400	25,200	15.0	12.5	1,100	5621993
	CA*F3642*6D*	A*VC950905DXB*	33,400	25,200	15.0	12.5	1,100	5622034
	CA*F3642*6D*	G*VC950905DXB*	33,400	25,200	15.0	12.5	1,100	5622035
	CA*F3642*6D*	A*VM961155DXB*	33,400	25,200	15.0	12.5	1,100	5622274
	CA*F3642*6D*	A*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622114
	CA*F3642*6D*	A*VM961005DXB*	33,400	25,200	15.0	12.5	1,100	5622236
	CA*F3642*6D*	G*VM961155DXB*	33,400	25,200	15.0	12.5	1,100	5622275
CA*F3642*6D*	A*VC950905CXB*	33,400	25,200	15.0	12.5	1,100	5621992	
CA*F3642*6D*	A*VM960805DXB*	33,400	25,200	15.0	12.5	1,100	5622198	
CA*F3642*6D*	G*VC80604B*B*	33,400	25,200	15.1	12.5	1,100	5325856	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CA*F3642*6D*	A*VC80805C*B*	33,400	25,200	15.0	12.5	1,100	5325874
	CA*F3642*6D*	G*E80603B*B*	33,400	25,200	15.0	12.5	1,150	5325822
	CA*F3642*6D*	G*E80805C*B*	33,400	25,200	15.5	12.5	1,150	5325829
	CA*F3642*6D*	ADVC80805C*B*	33,400	25,200	15.0	12.5	1,100	5326217
	CA*F3642*6D*	A*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621946
	CA*F3642*6D*	A*VC951155DXB*	33,400	25,200	15.0	12.5	1,100	5622074
	CA*F3642*6D*	G*VM960805CXB*	33,400	25,200	15.0	12.5	1,100	5622157
	CA*F3642*6D*	G*VC950704CXB*	33,400	25,200	15.0	12.5	1,100	5621947
	CA*F3642*6D*	G*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622115
	CA*F3642*6D*	G*VM960805DXB*	33,400	25,200	15.0	12.5	1,100	5622199
	CA*F3642*6D*	G*VC951155DXB*	33,400	25,200	15.0	12.5	1,100	5622075
	CA*F3642*6D*	A*VM960805CXB*	33,400	25,200	15.0	12.5	1,100	5622156
	CA*F3642*6D*	G*VM961005DXB*	33,400	25,200	15.0	12.5	1,100	5622237
	CA*F3642*6D*	G*VC80805C*B*	33,400	25,200	15.0	12.5	1,100	5325875
	CA*F3642*6D*	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,100	5325907
	CA*F3642*6D*	GME950805CXA*	33,400	25,200	14.5	12.0	1,150	5326261
	CA*F3642*6D*+EEP		33,400	25,200	14.0	12.0	1,100	5325785
	CA*F3642*6D*+EEP+TXV		33,400	25,200	14.5	12.0	1,100	5325786
	CA*F3642*6D*+MBVC1600**-1A*		33,400	25,200	15.0	12.5	1,100	5325787
	CA*F3642*6D*+MBVC1600**-1A*+TXV		33,400	25,200	15.5	12.5	1,100	5325788
	CA*F3642*6D*+MBVC2000**-1A*		33,400	25,200	16.0	13.0	1,100	5325789
	CA*F3642*6D*+MBVC2000**-1A*+TXV		33,400	25,200	16.0	13.0	1,100	5326907
	CA*F3642*6D*+TXV	G*VC80805C*B*	33,400	25,200	15.5	12.5	1,100	5325877
	CA*F3642*6D*+TXV	A*VC80604B*B*	33,400	25,200	15.5	12.5	1,100	5325857
	CA*F3642*6D*+TXV	GME951005DXA*	33,400	25,200	15.5	12.5	1,150	5326279
	CA*F3642*6D*+TXV	GME950603BXA*	33,400	25,200	14.5	12.0	1,150	5326252
SSX16	CA*F3642*6D*+TXV	A*VC950704CXB*	33,400	25,200	15.5	12.5	1,100	5621948
0361B*	CA*F3642*6D*+TXV	G*VC950905CXB*	33,400	25,200	15.5	12.5	1,100	5621995
(cont.)	CA*F3642*6D*+TXV	A*VM960805DXB*	33,400	25,200	15.5	12.5	1,100	5622200
	CA*F3642*6D*+TXV	ADVC81005C*B*	33,400	25,200	15.5	12.5	1,100	5326235
	CA*F3642*6D*+TXV	GME950805CXA*	33,400	25,200	14.5	12.0	1,150	5326262
	CA*F3642*6D*+TXV	G*E80603B*B*	33,400	25,200	15.1	12.5	1,150	5326291
	CA*F3642*6D*+TXV	G*E80805C*B*	33,400	25,200	15.5	12.5	1,150	5325830
	CA*F3642*6D*+TXV	G*VC80604B*B*	33,400	25,200	15.5	12.5	1,100	5325858
	CA*F3642*6D*+TXV	G*VC81005C*B*	33,400	25,200	15.5	12.5	1,100	5325909
	CA*F3642*6D*+TXV	A*VC81005C*B*	33,400	25,200	15.5	12.5	1,100	5325908
	CA*F3642*6D*+TXV	ADVC80805C*B*	33,400	25,200	15.5	12.5	1,100	5326218
	CA*F3642*6D*+TXV	G*E81005C*B*	33,400	25,200	15.5	12.5	1,150	5326297
	CA*F3642*6D*+TXV	G*VC951155DXB*	33,400	25,200	15.5	12.5	1,100	5622077
	CA*F3642*6D*+TXV	A*VM960805CXB*	33,400	25,200	15.5	12.5	1,100	5622158
	CA*F3642*6D*+TXV	G*VC950704CXB*	33,400	25,200	15.5	12.5	1,100	5621949
	CA*F3642*6D*+TXV	A*VC950905CXB*	33,400	25,200	15.5	12.5	1,100	5621994
	CA*F3642*6D*+TXV	A*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622116
	CA*F3642*6D*+TXV	G*VM960604CXB*	33,400	25,200	14.5	12.0	1,100	5622117
	CA*F3642*6D*+TXV	G*VM960805DXB*	33,400	25,200	15.5	12.5	1,100	5622201
	CA*F3642*6D*+TXV	A*VM961155DXB*	33,400	25,200	15.5	12.5	1,100	5622276
	CA*F3642*6D*+TXV	G*VM961005DXB*	33,400	25,200	15.5	12.5	1,100	5622239
	CA*F3642*6D*+TXV	A*VC950905DXB*	33,400	25,200	15.5	12.5	1,100	5622036
	CA*F3642*6D*+TXV	G*VC950905DXB*	33,400	25,200	15.5	12.5	1,100	5622037
	CA*F3642*6D*+TXV	A*VC951155DXB*	33,400	25,200	15.5	12.5	1,100	5622076
	CA*F3642*6D*+TXV	G*VM960805CXB*	33,400	25,200	15.5	12.5	1,100	5622159
	CA*F3642*6D*+TXV	A*VM961005DXB*	33,400	25,200	15.5	12.5	1,100	5622238
	CA*F3642*6D*+TXV	G*VM961155DXB*	33,400	25,200	15.5	12.5	1,100	5622277

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CA*F3642*6D*+TXV	A*VC80805C*B*	33,400	25,200	15.5	12.5	1,100	5325876
	CA*F3743*6D*	G*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325860
	CA*F3743*6D*	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325911
	CA*F3743*6D*	G*E80603B*B*	33,600	25,200	15.0	12.5	1,150	5325823
	CA*F3743*6D*	A*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325859
	CA*F3743*6D*	GME951005DXA*	33,600	25,200	15.5	12.5	1,150	5326280
	CA*F3743*6D*	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5326298
	CA*F3743*6D*	ADVC81005C*B*	33,600	25,200	15.5	12.5	1,100	5326236
	CA*F3743*6D*	GME950805CXA*	33,600	25,200	15.0	12.5	1,150	5326263
	CA*F3743*6D*	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5621997
	CA*F3743*6D*	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621950
	CA*F3743*6D*	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621951
	CA*F3743*6D*	A*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622118
	CA*F3743*6D*	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622160
	CA*F3743*6D*	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622161
	CA*F3743*6D*	G*VM960805DXB*	33,600	25,200	15.5	12.5	1,100	5622203
	CA*F3743*6D*	G*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622241
	CA*F3743*6D*	A*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622240
	CA*F3743*6D*	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325910
	CA*F3743*6D*	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325831
	CA*F3743*6D*	A*VC950905DXB*	33,600	25,200	15.5	12.5	1,100	5622038
	CA*F3743*6D*	G*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622119
	CA*F3743*6D*	A*VM960805DXB*	33,600	25,200	15.5	12.5	1,100	5622202
	CA*F3743*6D*	A*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622278
	CA*F3743*6D*	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5621996
	CA*F3743*6D*	A*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622078
	CA*F3743*6D*	G*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622079
	CA*F3743*6D*	G*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622279
	CA*F3743*6D*	A*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325878
	CA*F3743*6D*	G*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325879
	CA*F3743*6D*	ADVC80805C*B*	33,600	25,200	15.5	12.5	1,100	5326219
	CA*F3743*6D*	GME950603BXA*	33,600	25,200	14.5	12.0	1,150	5326253
	CA*F3743*6D*	G*VC950905DXB*	33,600	25,200	15.5	12.5	1,100	5622039
	CA*F3743*6D*+EEP		34,000	25,600	14.5	12.0	1,100	5325790
	CA*F3743*6D*+EEP+TXV		34,000	25,600	14.5	12.0	1,100	5325791
	CA*F3743*6D*+MBVC1600**-1A*		33,600	25,200	16.0	13.0	1,100	5325792
	CA*F3743*6D*+MBVC1600**-1A*+TXV		33,600	25,200	16.0	13.0	1,100	5325793
	CA*F3743*6D*+MBVC2000**-1A*		34,000	25,600	16.0	13.0	1,100	5326908
	CA*F3743*6D*+MBVC2000**-1A*+TXV		34,000	25,600	16.0	13.0	1,100	5325794
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325880
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325881
	CA*F3743*6D*+TXV	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5325844
CA*F3743*6D*+TXV	ADVC80805C*B*	33,600	25,200	15.5	12.5	1,100	5326220	
CA*F3743*6D*+TXV	GME950603BXA*	33,600	25,200	14.5	12.0	1,150	5326254	
CA*F3743*6D*+TXV	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5621998	
CA*F3743*6D*+TXV	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622163	
CA*F3743*6D*+TXV	A*VM960805DXB*	33,600	25,200	16.0	13.0	1,100	5622204	
CA*F3743*6D*+TXV	G*VM961005DXB*	34,000	25,600	16.0	13.0	1,100	5622243	
CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325862	
CA*F3743*6D*+TXV	GME951005DXA*	33,600	25,200	15.5	12.5	1,150	5326281	
CA*F3743*6D*+TXV	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325912	
CA*F3743*6D*+TXV	GME950805CXA*	33,600	25,200	15.0	12.5	1,150	5326264	
CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325861	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CA*F3743*6D*+TXV	G*VC951155DXB*	34,000	25,600	16.0	13.0	1,100	5622081
	CA*F3743*6D*+TXV	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621952
	CA*F3743*6D*+TXV	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5621999
	CA*F3743*6D*+TXV	A*VC950905DXB*	33,600	25,200	16.0	13.0	1,100	5622040
	CA*F3743*6D*+TXV	A*VC951155DXB*	34,000	25,600	16.0	13.0	1,100	5622080
	CA*F3743*6D*+TXV	A*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622120
	CA*F3743*6D*+TXV	G*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622121
	CA*F3743*6D*+TXV	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622162
	CA*F3743*6D*+TXV	G*VM960805DXB*	33,600	25,200	16.0	13.0	1,100	5622205
	CA*F3743*6D*+TXV	A*VM961005DXB*	34,000	25,600	16.0	13.0	1,100	5622242
	CA*F3743*6D*+TXV	A*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622280
	CA*F3743*6D*+TXV	G*VC950905DXB*	33,600	25,200	16.0	13.0	1,100	5622041
	CA*F3743*6D*+TXV	G*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622281
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325832
	CA*F3743*6D*+TXV	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325913
	CA*F3743*6D*+TXV	ADVC81005C*B*	33,600	25,200	15.5	12.5	1,100	5326237
	CA*F3743*6D*+TXV	G*E80603B*B*	33,600	25,200	15.1	12.5	1,150	5326292
	CA*F3743*6D*+TXV	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621953
	CA*F4860*6D*	G*E80603B*B*	34,000	25,600	15.0	12.5	1,150	5325824
	CA*F4860*6D*	A*VC80805C*B*	34,000	25,600	15.5	12.5	1,100	5325882
	CA*F4860*6D*	G*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325915
	CA*F4860*6D*	G*E80805C*B*	34,000	25,600	15.5	12.5	1,150	5325833
	CA*F4860*6D*	A*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325863
	CA*F4860*6D*	G*VC80805C*B*	34,000	25,600	15.5	12.5	1,100	5325883
	CA*F4860*6D*	ADVC80805C*B*	33,800	25,400	15.5	12.5	1,100	5326221
	CA*F4860*6D*	GME950805CXA*	34,000	25,600	15.0	12.5	1,150	5326265
	CA*F4860*6D*	G*E81005C*B*	34,000	25,600	15.5	12.5	1,150	5326299
	CA*F4860*6D*	G*VC950905CXB*	34,000	25,600	15.5	12.5	1,100	5622001
	CA*F4860*6D*	G*VM960805CXB*	34,000	25,600	15.5	12.5	1,100	5622165
	CA*F4860*6D*	G*VC950704CXB*	34,000	25,600	15.5	12.5	1,100	5621955
	CA*F4860*6D*	ADVC81005C*B*	33,600	25,200	15.5	12.5	1,100	5326238
	CA*F4860*6D*	GME951005DXA*	34,000	25,600	15.5	12.5	1,150	5326282
	CA*F4860*6D*	G*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325864
	CA*F4860*6D*	A*VC950704CXB*	34,000	25,600	15.5	12.5	1,100	5621954
	CA*F4860*6D*	A*VM960805CXB*	34,000	25,600	15.5	12.5	1,100	5622164
	CA*F4860*6D*	G*VC950905DXB*	34,000	25,600	15.5	12.5	1,100	5622043
	CA*F4860*6D*	G*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622083
	CA*F4860*6D*	A*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622122
	CA*F4860*6D*	A*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622244
	CA*F4860*6D*	G*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622245
	CA*F4860*6D*	A*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622282
	CA*F4860*6D*	A*VC950905DXB*	34,000	25,600	15.5	12.5	1,100	5622042
	CA*F4860*6D*	A*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622082
	CA*F4860*6D*	G*VM960604CXB*	34,000	25,600	15.0	12.5	1,100	5622123
	CA*F4860*6D*	G*VM960805DXB*	34,000	25,600	15.5	12.5	1,100	5622207
	CA*F4860*6D*	G*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622283
	CA*F4860*6D*	A*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325914
	CA*F4860*6D*	GME950603BXA*	33,600	25,200	14.5	12.0	1,150	5326255
	CA*F4860*6D*	A*VC950905CXB*	34,000	25,600	15.5	12.5	1,100	5622000
	CA*F4860*6D*	A*VM960805DXB*	34,000	25,600	15.5	12.5	1,100	5622206
CA*F4860*6D*+EEP		34,000	25,600	14.5	12.0	1,100	5325795	
CA*F4860*6D*+EEP+TXV		34,000	25,600	14.5	12.0	1,200	4214565	
CA*F4860*6D*+MBVC1600**-1A*		34,000	25,600	16.0	13.0	1,100	5325796	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CA*F4860*6D*+MBVC1600**-1A*+TXV		34,000	25,600	16.0	13.0	1,200	3880320
	CA*F4860*6D*+MBVC2000**-1A*		34,000	25,600	16.0	13.0	1,100	5325797
	CA*F4860*6D*+MBVC2000**-1A*+TXV		34,000	25,600	16.0	13.0	1,200	3880343
	CA*F4860*6D*+TXV	G*VC91155DXA*	34,800	26,200	16.0	13.2	1,100	3880541
	CA*F4860*6D*+TXV	A*VC80604B*B*	34,000	25,600	15.5	12.5	1,200	5038994
	CA*F4860*6D*+TXV	G*VC80604B*B*	34,000	25,600	15.5	12.5	1,200	5038858
	CA*F4860*6D*+TXV	ADVC81005C*B*	33,800	25,400	16.0	13.0	1,200	5039191
	CA*F4860*6D*+TXV	GME950603BXA*	33,600	25,200	14.5	12.0	1,250	4703709
	CA*F4860*6D*+TXV	G*VM961005DXB*	34,000	25,600	16.0	13.0	1,200	5622247
	CA*F4860*6D*+TXV	A*VC950905DXB*	34,000	25,600	16.0	13.0	1,200	5622044
	CA*F4860*6D*+TXV	A*VM960805DXB*	34,000	25,600	16.0	13.0	1,200	5622208
	CA*F4860*6D*+TXV	G*VC950905CXB*	34,000	25,600	15.5	12.5	1,200	5622003
	CA*F4860*6D*+TXV	A*VC81005C*B*	33,800	25,400	15.5	12.5	1,200	5038888
	CA*F4860*6D*+TXV	ADVC80805C*B*	33,800	25,400	16.0	13.0	1,200	5039082
	CA*F4860*6D*+TXV	A*VC80805C*B*	34,000	25,600	16.0	13.0	1,200	5039185
	CA*F4860*6D*+TXV	G*E80603B*B*	34,000	25,600	15.5	12.5	1,200	5039021
	CA*F4860*6D*+TXV	G*VC81005C*B*	33,800	25,400	15.5	12.5	1,200	5039258
	CA*F4860*6D*+TXV	GME950805CXA*	34,000	25,600	15.0	12.5	1,200	4701089
	CA*F4860*6D*+TXV	GME951005DXA*	34,000	25,600	15.5	12.5	1,200	4701092
	CA*F4860*6D*+TXV	G*VC80805C*B*	34,000	25,600	16.0	13.0	1,200	5039209
	CA*F4860*6D*+TXV	A*VC950714CXB*	34,000	25,600	15.5	13.0	1,100	5621984
	CA*F4860*6D*+TXV	A*VC950915DXB*	35,000	26,400	16.0	13.2	1,150	5622068
	CA*F4860*6D*+TXV	G*VC950915DXB*	35,000	26,400	16.0	13.2	1,150	5622069
	CA*F4860*6D*+TXV	A*VM960805CXB*	34,000	25,600	15.5	12.5	1,200	5622166
	CA*F4860*6D*+TXV	G*VM960805DXB*	34,000	25,600	16.0	13.0	1,200	5622209
	CA*F4860*6D*+TXV	G*VC950704CXB*	34,000	25,600	15.5	12.5	1,200	5621957
	CA*F4860*6D*+TXV	G*VC951155DXB*	34,000	25,600	16.0	13.0	1,200	5622086
	CA*F4860*6D*+TXV	G*VM960805CXB*	34,000	25,600	15.5	12.5	1,200	5622167
	CA*F4860*6D*+TXV	A*VC950704CXB*	34,000	25,600	15.5	12.5	1,200	5621956
	CA*F4860*6D*+TXV	G*VM961155DXB*	34,000	25,600	16.0	13.0	1,200	5622285
	CA*F4860*6D*+TXV	A*VM961005DXB*	34,000	25,600	16.0	13.0	1,200	5622246
	CA*F4860*6D*+TXV	G*VC950714CXB*	34,000	25,600	15.5	13.0	1,100	5621985
	CA*F4860*6D*+TXV	A*VC950905CXB*	34,000	25,600	15.5	12.5	1,200	5622002
	CA*F4860*6D*+TXV	G*E80805C*B*	34,000	25,600	16.0	13.0	1,200	5038876
	CA*F4860*6D*+TXV	G*E81005C*B*	34,000	25,600	16.0	13.0	1,200	5039058
	CA*F4860*6D*+TXV	G*VC950905DXB*	34,000	25,600	16.0	13.0	1,200	5622045
	CA*F4860*6D*+TXV	A*VC951155DXB*	34,000	25,600	16.0	13.0	1,200	5622085
	CA*F4860*6D*+TXV	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,200	5622124
	CA*F4860*6D*+TXV	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,200	5622125
	CA*F4860*6D*+TXV	A*VM961155DXB*	34,000	25,600	16.0	13.0	1,200	5622284
	CA*F4961*6D*	A*VC80604B*B*	33,800	25,400	16.0	13.0	1,100	5325865
	CA*F4961*6D*	G*VC81005C*B*	33,800	25,400	16.0	13.0	1,100	5325917
	CA*F4961*6D*	G*VC80604B*B*	33,800	25,400	16.0	13.0	1,100	5325866
	CA*F4961*6D*	G*VC80805C*B*	34,200	25,800	16.0	13.0	1,100	5325885
	CA*F4961*6D*	A*VC81005C*B*	33,800	25,400	16.0	13.0	1,100	5325916
	CA*F4961*6D*	ADVC80805C*B*	33,800	25,400	16.0	13.0	1,100	5326222
	CA*F4961*6D*	ADVC81005C*B*	33,800	25,400	16.0	13.0	1,100	5326239
CA*F4961*6D*	A*VC950905CXB*	34,200	25,800	16.0	13.0	1,100	5622004	
CA*F4961*6D*	A*VC951155DXB*	34,200	25,800	16.0	13.0	1,100	5622087	
CA*F4961*6D*	G*VM960805DXB*	34,200	25,800	16.0	13.0	1,100	5622211	
CA*F4961*6D*	A*VC950704CXB*	34,200	25,800	16.0	13.0	1,100	5621958	
CA*F4961*6D*	G*VC950704CXB*	34,200	25,800	16.0	13.0	1,100	5621959	
CA*F4961*6D*	G*E80603B*B*	34,200	25,800	15.5	12.5	1,150	5325825	

See Notes on Page 53.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
SSX16 0361B* (cont.)	CA*F4961*6D*	GME950603BXA*	33,800	25,400	15.0	12.5	1,150	5326256	
	CA*F4961*6D*	GME950805CXA*	34,200	25,800	15.0	12.5	1,150	5326266	
	CA*F4961*6D*	G*E81005C*B*	34,000	25,600	16.0	13.0	1,150	5326300	
	CA*F4961*6D*	A*VC80805C*B*	34,200	25,800	16.0	13.0	1,100	5325884	
	CA*F4961*6D*	G*VC951155DXB*	34,200	25,800	16.0	13.0	1,100	5622088	
	CA*F4961*6D*	A*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622126	
	CA*F4961*6D*	A*VM960805CXB*	34,200	25,800	16.0	13.0	1,100	5622168	
	CA*F4961*6D*	A*VC950905DXB*	34,200	25,800	16.0	13.0	1,100	5622046	
	CA*F4961*6D*	G*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622127	
	CA*F4961*6D*	G*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622287	
	CA*F4961*6D*	A*VM960805DXB*	34,200	25,800	16.0	13.0	1,100	5622210	
	CA*F4961*6D*	A*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622286	
	CA*F4961*6D*	G*VC950905DXB*	34,200	25,800	16.0	13.0	1,100	5622047	
	CA*F4961*6D*	A*VM961005DXB*	34,200	25,800	16.0	13.0	1,100	5622248	
	CA*F4961*6D*	G*VM961005DXB*	34,200	25,800	16.0	13.0	1,100	5622249	
	CA*F4961*6D*	G*E80805C*B*	34,000	25,600	16.0	13.0	1,150	5325834	
	CA*F4961*6D*	GME951005DXA*	34,200	25,800	16.0	13.0	1,150	5326283	
	CA*F4961*6D*	G*VC950905CXB*	34,200	25,800	16.0	13.0	1,100	5622005	
	CA*F4961*6D*	G*VM960805CXB*	34,200	25,800	16.0	13.0	1,100	5622169	
	CA*F4961*6D*+EEP			34,200	25,800	14.5	12.0	1,100	5338940
	CA*F4961*6D*+EEP+TXV			34,000	25,600	14.5	12.0	1,200	4940533
	CA*F4961*6D*+MBVC1600**-1A*			34,200	25,800	16.0	13.0	1,100	5325798
	CA*F4961*6D*+MBVC1600**-1A*+TXV			34,200	25,800	16.0	13.0	1,100	5325799
	CA*F4961*6D*+MBVC2000**-1A*			34,200	25,800	16.0	13.0	1,100	5325800
	CA*F4961*6D*+MBVC2000**-1A*+TXV			34,200	25,800	16.0	13.0	1,100	5325801
	CA*F4961*6D*+TXV	A*VC80805C*B*		34,200	25,800	16.0	13.0	1,100	5038898
	CA*F4961*6D*+TXV	ADV81005C*B*		33,800	25,400	16.0	13.0	1,100	5038906
	CA*F4961*6D*+TXV	G*VC80604B*B*		33,800	25,400	16.0	13.0	1,100	5038840
	CA*F4961*6D*+TXV	ADV80805C*B*		33,800	25,400	16.0	13.0	1,100	5039270
	CA*F4961*6D*+TXV	A*VC81005C*B*		33,800	25,400	16.0	13.0	1,100	5039023
	CA*F4961*6D*+TXV	GME950805CXA*		34,200	25,800	15.0	12.5	1,150	4701094
	CA*F4961*6D*+TXV	GME951005DXA*		34,200	25,800	16.0	13.0	1,150	4701098
	CA*F4961*6D*+TXV	A*VC950905DXB*		34,200	25,800	16.0	13.0	1,100	5622048
	CA*F4961*6D*+TXV	G*VC950905DXB*		34,200	25,800	16.0	13.0	1,100	5622049
	CA*F4961*6D*+TXV	A*VC951155DXB*		34,200	25,800	16.0	13.0	1,100	5622089
	CA*F4961*6D*+TXV	G*VC951155DXB*		34,200	25,800	16.0	13.0	1,100	5622090
	CA*F4961*6D*+TXV	A*VM961005DXB*		34,200	25,800	16.0	13.0	1,100	5622250
	CA*F4961*6D*+TXV	A*VC80604B*B*		33,800	25,400	16.0	13.0	1,100	5038842
	CA*F4961*6D*+TXV	G*VC950905CXB*		34,200	25,800	16.0	13.0	1,100	5622007
	CA*F4961*6D*+TXV	A*VM960805CXB*		34,200	25,800	16.0	13.0	1,100	5622170
	CA*F4961*6D*+TXV	A*VM960805DXB*		34,200	25,800	16.0	13.0	1,100	5622212
	CA*F4961*6D*+TXV	G*E80603B*B*		34,200	25,800	15.5	12.5	1,150	5039192
	CA*F4961*6D*+TXV	G*VC81005C*B*		33,800	25,400	16.0	13.0	1,100	5038977
	CA*F4961*6D*+TXV	G*VC80805C*B*		34,200	25,800	16.0	13.0	1,100	5039210
	CA*F4961*6D*+TXV	GME950603BXA*		33,800	25,400	15.0	12.5	1,150	4703711
CA*F4961*6D*+TXV	G*E81005C*B*		34,000	25,600	16.0	13.0	1,150	5039177	
CA*F4961*6D*+TXV	A*VC950704CXB*		34,200	25,800	16.0	13.0	1,100	5621960	
CA*F4961*6D*+TXV	G*VC950704CXB*		34,200	25,800	16.0	13.0	1,100	5621961	
CA*F4961*6D*+TXV	A*VC950714CXB*		34,000	25,600	15.5	13.0	1,100	5621986	
CA*F4961*6D*+TXV	G*VC950714CXB*		34,000	25,600	15.5	13.0	1,100	5621987	
CA*F4961*6D*+TXV	G*VM960805CXB*		34,200	25,800	16.0	13.0	1,100	5622171	
CA*F4961*6D*+TXV	G*VM960805DXB*		34,200	25,800	16.0	13.0	1,100	5622213	
CA*F4961*6D*+TXV	G*VM961005DXB*		34,200	25,800	16.0	13.0	1,100	5622251	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CA*F4961*6D*+TXV	A*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622288
	CA*F4961*6D*+TXV	A*VC950905CXB*	34,200	25,800	16.0	13.0	1,100	5622006
	CA*F4961*6D*+TXV	G*E80805C*B*	34,000	25,600	16.0	13.0	1,150	5039171
	CA*F4961*6D*+TXV	A*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622128
	CA*F4961*6D*+TXV	G*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622129
	CA*F4961*6D*+TXV	G*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622289
	CAPT3743*4A*	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5520575
	CAPT3743*4A*	ADVC80805C*B*	33,600	25,200	15.5	12.5	1,090	5520582
	CAPT3743*4A*	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5520589
	CAPT3743*4A*	A*VC80805C*B*	33,800	25,400	15.5	12.5	1,110	5520574
	CAPT3743*4A*	G*VC80604B*B*	33,600	25,200	15.5	12.5	1,110	5520587
	CAPT3743*4A*	ADVC81005C*B*	33,600	25,200	15.5	12.5	1,100	5520583
	CAPT3743*4A*	GME951005DXA*	33,600	25,200	15.5	12.5	1,100	5520598
	CAPT3743*4A*	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,080	5622009
	CAPT3743*4A*	A*VC950905DXB*	33,600	25,200	16.0	13.0	1,090	5622050
	CAPT3743*4A*	G*VC950905DXB*	33,600	25,200	16.0	13.0	1,090	5622051
	CAPT3743*4A*	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,080	5622172
	CAPT3743*4A*	G*VC951155DXB*	34,000	25,600	16.0	13.0	1,120	5622092
	CAPT3743*4A*	G*VM960805DXB*	33,600	25,200	16.0	13.0	1,115	5622215
	CAPT3743*4A*	G*VM960604CXB*	34,000	25,600	15.0	12.5	1,110	5622131
	CAPT3743*4A*	A*VC80604B*B*	33,600	25,200	15.5	12.5	1,110	5520573
	CAPT3743*4A*	G*E80603B*B*	33,600	25,200	15.0	12.5	1,100	5520584
	CAPT3743*4A*	G*E80805C*B*	33,600	25,200	15.5	12.5	1,100	5520585
	CAPT3743*4A*	GME950805CXA*	33,600	25,200	15.0	12.5	1,100	5520597
	CAPT3743*4A*	GME950603BXA*	33,600	25,200	14.5	12.0	1,100	5520596
	CAPT3743*4A*	A*VM960604CXB*	34,000	25,600	15.0	12.5	1,110	5622130
	CAPT3743*4A*	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,080	5622008
	CAPT3743*4A*	A*VC951155DXB*	34,000	25,600	16.0	13.0	1,120	5622091
	CAPT3743*4A*	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,080	5622173
	CAPT3743*4A*	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621963
	CAPT3743*4A*	A*VM961005DXB*	34,000	25,600	16.0	13.0	1,120	5622252
	CAPT3743*4A*	A*VM960805DXB*	33,600	25,200	16.0	13.0	1,115	5622214
	CAPT3743*4A*	G*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622291
	CAPT3743*4A*	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621962
	CAPT3743*4A*	A*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622290
	CAPT3743*4A*	G*E81005C*B*	33,600	25,200	15.5	12.5	1,100	5520586
	CAPT3743*4A*	G*VC80805C*B*	33,800	25,400	15.5	12.5	1,110	5520588
	CAPT3743*4A*	G*VM961005DXB*	34,000	25,600	16.0	13.0	1,120	5622253
	CAPT3743*4A*+EEP		34,000	25,600	14.5	12.0	1,100	5520599
	CAPT3743*4A*+MBVC1600**-1A*		33,600	25,200	16.0	13.0	1,095	5527286
	CAPT3743*4A*+MBVC2000**-1A*		34,000	25,600	16.0	13.0	1,090	5527287
	CHPF3743C6B*	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325835
	CHPF3743C6B*	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5325845
	CHPF3743C6B*	A*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325867
	CHPF3743C6B*	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325919
	CHPF3743C6B*	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622132
	CHPF3743C6B*	G*E80603B*B*	33,600	25,200	15.0	12.5	1,150	5325826
	CHPF3743C6B*	G*VC80805C*B*	33,600	25,200	15.5	12.5	1,100	5325887
	CHPF3743C6B*	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325918
	CHPF3743C6B*	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326267
CHPF3743C6B*	G*VC80604B*B*	33,600	25,200	15.5	12.5	1,100	5325868	
CHPF3743C6B*	A*VC80805C*B*	33,600	25,200	15.5	12.5	1,100	5325886	
CHPF3743C6B*	GME950603BXA*	33,600	25,200	14.5	12.0	1,150	5326257	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CHPF3743C6B*	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622010
	CHPF3743C6B*	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622011
	CHPF3743C6B*	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622175
	CHPF3743C6B*	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622133
	CHPF3743C6B*	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621965
	CHPF3743C6B*	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621964
	CHPF3743C6B*	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622174
	CHPF3743C6B*+EEP		34,000	25,600	14.5	12.0	1,100	5326909
	CHPF3743C6B*+EEP+TXV		34,000	25,600	14.5	12.0	1,100	5325802
	CHPF3743C6B*+MBVC1600**-1A*		33,600	25,200	16.0	13.0	1,100	5325803
	CHPF3743C6B*+MBVC1600**-1A*+TXV		33,600	25,200	16.0	13.0	1,100	5325804
	CHPF3743C6B*+MBVC2000**-1A*		34,000	25,600	16.0	13.0	1,100	5326910
	CHPF3743C6B*+MBVC2000**-1A*+TXV		34,000	25,600	16.0	13.0	1,100	5325805
	CHPF3743C6B*+TXV	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5325846
	CHPF3743C6B*+TXV	A*VC80805C*B*	33,600	25,200	15.5	12.5	1,100	5325888
	CHPF3743C6B*+TXV	GME950603BXA*	33,600	25,200	14.5	12.0	1,150	5326258
	CHPF3743C6B*+TXV	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621967
	CHPF3743C6B*+TXV	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622013
	CHPF3743C6B*+TXV	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325836
	CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	25,200	16.0	13.0	1,100	5325870
	CHPF3743C6B*+TXV	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325920
	CHPF3743C6B*+TXV	G*E80603B*B*	33,600	25,200	15.1	12.5	1,150	5326293
	CHPF3743C6B*+TXV	G*VC80805C*B*	33,600	25,200	15.5	12.5	1,100	5325889
	CHPF3743C6B*+TXV	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325921
	CHPF3743C6B*+TXV	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622012
SSX16	CHPF3743C6B*+TXV	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622134
0361B*	CHPF3743C6B*+TXV	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622135
(cont.)	CHPF3743C6B*+TXV	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622177
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	25,200	16.0	13.0	1,100	5325869
	CHPF3743C6B*+TXV	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326268
	CHPF3743C6B*+TXV	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621966
	CHPF3743C6B*+TXV	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622176
	CHPF3743D6B*	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325837
	CHPF3743D6B*	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5326301
	CHPF3743D6B*	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621969
	CHPF3743D6B*	G*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622094
	CHPF3743D6B*	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622137
	CHPF3743D6B*	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621968
	CHPF3743D6B*	A*VC951155DXB*	34,000	25,600	15.5	12.5	1,100	5622093
	CHPF3743D6B*	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622136
	CHPF3743D6B*	A*VM960805DXB*	33,600	25,200	15.5	12.5	1,100	5622216
	CHPF3743D6B*	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325923
	CHPF3743D6B*	A*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325890
	CHPF3743D6B*	G*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325891
	CHPF3743D6B*	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325922
	CHPF3743D6B*	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326269
	CHPF3743D6B*	GME951005DXA*	33,600	25,200	15.5	12.5	1,150	5326284
	CHPF3743D6B*	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622014
	CHPF3743D6B*	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622179
	CHPF3743D6B*	G*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622293
	CHPF3743D6B*	G*VC950905DXB*	33,600	25,200	15.5	12.5	1,100	5622053
	CHPF3743D6B*	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622178
	CHPF3743D6B*	G*VM960805DXB*	33,600	25,200	15.5	12.5	1,100	5622217

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CHPF3743D6B*	A*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622254
	CHPF3743D6B*	A*VC950905DXB*	33,600	25,200	15.5	12.5	1,100	5622052
	CHPF3743D6B*	G*VM961005DXB*	34,000	25,600	15.5	12.5	1,100	5622255
	CHPF3743D6B*	A*VM961155DXB*	34,000	25,600	15.5	12.5	1,100	5622292
	CHPF3743D6B*	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622015
	CHPF3743D6B*+MBVC1600**-1A*		33,600	25,200	16.0	13.0	1,100	5326911
	CHPF3743D6B*+MBVC1600**-1A*+TXV		33,600	25,200	16.0	13.0	1,100	5325806
	CHPF3743D6B*+MBVC2000**-1A*		34,000	25,600	16.0	13.0	1,100	5326912
	CHPF3743D6B*+MBVC2000**-1A*+TXV		34,000	25,600	16.0	13.0	1,100	5325807
	CHPF3743D6B*+TXV	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326270
	CHPF3743D6B*+TXV	A*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621970
	CHPF3743D6B*+TXV	G*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622017
	CHPF3743D6B*+TXV	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622139
	CHPF3743D6B*+TXV	A*VC950905DXB*	33,600	25,200	16.0	13.0	1,100	5622054
	CHPF3743D6B*+TXV	G*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622295
	CHPF3743D6B*+TXV	A*VM960805DXB*	33,600	25,200	16.0	13.0	1,100	5622218
	CHPF3743D6B*+TXV	A*VM961155DXB*	34,000	25,600	16.0	13.0	1,100	5622294
	CHPF3743D6B*+TXV	G*E81005C*B*	33,600	25,200	15.5	12.5	1,150	5325847
	CHPF3743D6B*+TXV	G*E80805C*B*	33,600	25,200	15.5	12.5	1,150	5325838
	CHPF3743D6B*+TXV	G*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325893
	CHPF3743D6B*+TXV	A*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325924
	CHPF3743D6B*+TXV	G*VC81005C*B*	33,600	25,200	15.5	12.5	1,100	5325925
	CHPF3743D6B*+TXV	GME951005DXA*	33,600	25,200	15.5	12.5	1,150	5326285
	CHPF3743D6B*+TXV	A*VC80805C*B*	33,800	25,400	15.5	12.5	1,100	5325892
	CHPF3743D6B*+TXV	G*VC951155DXB*	34,000	25,600	16.0	13.0	1,100	5622096
	CHPF3743D6B*+TXV	A*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622180
	CHPF3743D6B*+TXV	G*VM960805DXB*	33,600	25,200	16.0	13.0	1,100	5622219
	CHPF3743D6B*+TXV	G*VM961005DXB*	34,000	25,600	16.0	13.0	1,100	5622257
	CHPF3743D6B*+TXV	G*VC950905DXB*	33,600	25,200	16.0	13.0	1,100	5622055
	CHPF3743D6B*+TXV	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622138
	CHPF3743D6B*+TXV	G*VC950704CXB*	33,600	25,200	15.5	12.5	1,100	5621971
	CHPF3743D6B*+TXV	A*VC950905CXB*	33,600	25,200	15.5	12.5	1,100	5622016
	CHPF3743D6B*+TXV	A*VM961005DXB*	34,000	25,600	16.0	13.0	1,100	5622256
	CHPF3743D6B*+TXV	G*VM960805CXB*	33,600	25,200	15.5	12.5	1,100	5622181
	CHPF3743D6B*+TXV	A*VC951155DXB*	34,000	25,600	16.0	13.0	1,100	5622095
	CHPF4860D6D*	A*VC80805C*B*	34,200	25,800	15.5	12.5	1,100	5325894
	CHPF4860D6D*	G*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325927
	CHPF4860D6D*	G*VC950704CXB*	34,200	25,800	15.5	12.5	1,100	5621973
	CHPF4860D6D*	G*VC950905CXB*	34,200	25,800	15.5	12.5	1,100	5622019
	CHPF4860D6D*	G*VM960805CXB*	33,800	25,400	15.5	12.5	1,100	5622183
	CHPF4860D6D*	G*VC950905DXB*	34,200	25,800	15.5	12.5	1,100	5622057
	CHPF4860D6D*	A*VC951155DXB*	34,200	25,800	15.5	12.5	1,100	5622097
	CHPF4860D6D*	A*VM961155DXB*	34,200	25,800	15.5	12.5	1,100	5622296
	CHPF4860D6D*	G*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622141
	CHPF4860D6D*	A*VM960805DXB*	33,800	25,400	15.5	12.5	1,100	5622220
	CHPF4860D6D*	A*VC950905CXB*	34,200	25,800	15.5	12.5	1,100	5622018
	CHPF4860D6D*	A*VC950905DXB*	34,200	25,800	15.5	12.5	1,100	5622056
	CHPF4860D6D*	G*VM961005DXB*	34,200	25,800	15.5	12.5	1,100	5622259
	CHPF4860D6D*	G*E80805C*B*	34,000	25,600	15.5	12.5	1,150	5325839
	CHPF4860D6D*	A*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325926
CHPF4860D6D*	G*E81005C*B*	34,000	25,600	15.5	12.5	1,150	5326302	
CHPF4860D6D*	GME950805CXA*	34,200	25,800	15.0	12.5	1,150	5326271	
CHPF4860D6D*	G*VC80805C*B*	34,200	25,800	15.5	12.5	1,100	5325895	

See Notes on Page 53.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CHPF4860D6D*	GME951005DXA*	34,200	25,800	15.5	12.5	1,150	5326286
	CHPF4860D6D*	A*VM960805CXB*	33,800	25,400	15.5	12.5	1,100	5622182
	CHPF4860D6D*	G*VM960805DXB*	33,800	25,400	15.5	12.5	1,100	5622221
	CHPF4860D6D*	G*VM961155DXB*	34,200	25,800	15.5	12.5	1,100	5622297
	CHPF4860D6D*	A*VC950704CXB*	34,200	25,800	15.5	12.5	1,100	5621972
	CHPF4860D6D*	G*VC951155DXB*	34,200	25,800	15.5	12.5	1,100	5622098
	CHPF4860D6D*	A*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622140
	CHPF4860D6D*	A*VM961005DXB*	34,200	25,800	15.5	12.5	1,100	5622258
	CHPF4860D6D*+EEP		34,200	25,800	14.5	12.0	1,100	5338939
	CHPF4860D6D*+EEP+TXV		34,000	25,600	14.5	12.0	1,200	3586326
	CHPF4860D6D*+MBVC1600**-1A*		34,200	25,800	16.0	13.0	1,100	5325808
	CHPF4860D6D*+MBVC1600**-1A*+TXV		34,200	25,800	16.0	13.0	1,100	5325809
	CHPF4860D6D*+MBVC2000**-1A*		34,200	25,800	16.0	13.0	1,100	5325810
	CHPF4860D6D*+MBVC2000**-1A*+TXV		34,200	25,800	16.0	13.0	1,100	3609504
	CHPF4860D6D*+TXV	GME950805CXA*	34,200	25,800	15.0	12.5	1,150	4701123
	CHPF4860D6D*+TXV	A*VC80805C*B*	34,200	25,800	16.0	13.0	1,100	5038899
	CHPF4860D6D*+TXV	G*E80603B*B*	34,000	25,600	15.0	12.5	1,150	5038907
	CHPF4860D6D*+TXV	G*E81005C*B*	34,000	25,600	15.5	12.5	1,150	5039022
	CHPF4860D6D*+TXV	A*VC81005C*B*	33,800	25,400	16.0	13.0	1,100	5039065
	CHPF4860D6D*+TXV	A*VC80604B*B*	34,400	25,800	15.5	12.7	1,220	5039042
	CHPF4860D6D*+TXV	GME951005DXA*	34,200	25,800	16.0	13.0	1,150	4701126
	CHPF4860D6D*+TXV	A*VC950704CXB*	34,200	25,800	16.0	13.0	1,100	5621974
	CHPF4860D6D*+TXV	G*VM960805CXB*	34,200	25,800	16.0	13.0	1,100	5622185
	CHPF4860D6D*+TXV	A*VC950905DXB*	34,200	25,800	16.0	13.0	1,100	5622058
	CHPF4860D6D*+TXV	G*VM961005DXB*	34,200	25,800	16.0	13.0	1,100	5622261
	CHPF4860D6D*+TXV	A*VM960805DXB*	34,200	25,800	16.0	13.0	1,100	5622222
	CHPF4860D6D*+TXV	G*VC950905DXB*	34,200	25,800	16.0	13.0	1,100	5622059
	CHPF4860D6D*+TXV	A*VC951155DXB*	34,200	25,800	16.0	13.0	1,100	5622099
	CHPF4860D6D*+TXV	G*VC951155DXB*	34,200	25,800	16.0	13.0	1,100	5622100
	CHPF4860D6D*+TXV	A*VM961005DXB*	34,200	25,800	16.0	13.0	1,100	5622260
	CHPF4860D6D*+TXV	G*VC80604B*B*	34,400	25,800	15.5	12.7	1,220	5038841
	CHPF4860D6D*+TXV	G*VC80805C*B*	34,200	25,800	16.0	13.0	1,100	5038919
	CHPF4860D6D*+TXV	G*E80805C*B*	34,000	25,600	15.5	12.5	1,150	5039064
	CHPF4860D6D*+TXV	G*VM960805DXB*	34,200	25,800	16.0	13.0	1,100	5622223
	CHPF4860D6D*+TXV	A*VC950905CXB*	34,200	25,800	16.0	13.0	1,100	5622020
	CHPF4860D6D*+TXV	G*VC950905CXB*	34,200	25,800	16.0	13.0	1,100	5622021
	CHPF4860D6D*+TXV	G*VC950704CXB*	34,200	25,800	16.0	13.0	1,100	5621975
	CHPF4860D6D*+TXV	A*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622142
	CHPF4860D6D*+TXV	G*VM960604CXB*	34,200	25,800	15.0	12.5	1,100	5622143
	CHPF4860D6D*+TXV	A*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622298
	CHPF4860D6D*+TXV	GME950603BXA*	34,000	25,600	15.0	12.5	1,200	4703713
	CHPF4860D6D*+TXV	G*VC81005C*B*	33,800	25,400	16.0	13.0	1,100	5039193
	CHPF4860D6D*+TXV	A*VM960805CXB*	34,200	25,800	16.0	13.0	1,100	5622184
	CHPF4860D6D*+TXV	G*VM961155DXB*	34,200	25,800	16.0	13.0	1,100	5622299
	CSCF3642N6D*	G*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325897
	CSCF3642N6D*	A*VC81005C*B*	33,600	25,200	15.0	12.5	1,100	5325928
	CSCF3642N6D*	A*VM961155DXB*	34,000	25,600	15.0	12.5	1,100	5622300
	CSCF3642N6D*	G*VC950704CXB*	33,600	25,200	15.0	12.5	1,100	5621977
	CSCF3642N6D*	G*VC950905CXB*	33,600	25,200	15.0	12.5	1,100	5622023
	CSCF3642N6D*	A*VC950905DXB*	33,600	25,200	15.0	12.5	1,100	5622060
CSCF3642N6D*	A*VM961005DXB*	34,000	25,600	15.0	12.5	1,100	5622262	
CSCF3642N6D*	G*E81005C*B*	33,600	25,200	15.0	12.5	1,150	5325848	
CSCF3642N6D*	G*VC81005C*B*	33,600	25,200	15.0	12.5	1,100	5325929	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CSCF3642N6D*	G*E80805C*B*	33,600	25,200	15.0	12.5	1,150	5325840
	CSCF3642N6D*	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326272
	CSCF3642N6D*	A*VC950704CXB*	33,600	25,200	15.0	12.5	1,100	5621976
	CSCF3642N6D*	A*VC950905CXB*	33,600	25,200	15.0	12.5	1,100	5622022
	CSCF3642N6D*	G*VM960805CXB*	33,600	25,200	15.0	12.5	1,100	5622187
	CSCF3642N6D*	G*VM961155DXB*	34,000	25,600	15.0	12.5	1,100	5622301
	CSCF3642N6D*	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622145
	CSCF3642N6D*	G*VM960805DXB*	33,600	25,200	15.0	12.5	1,100	5622225
	CSCF3642N6D*	G*VM961005DXB*	34,000	25,600	15.0	12.5	1,100	5622263
	CSCF3642N6D*	G*VC951155DXB*	33,600	25,200	15.0	12.5	1,100	5622102
	CSCF3642N6D*	A*VM960805CXB*	33,600	25,200	15.0	12.5	1,100	5622186
	CSCF3642N6D*	A*VM960805DXB*	33,600	25,200	15.0	12.5	1,100	5622224
	CSCF3642N6D*	A*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325896
	CSCF3642N6D*	GME951005DXA*	33,600	25,200	15.0	12.5	1,150	5326287
	CSCF3642N6D*	G*VC950905DXB*	33,600	25,200	15.0	12.5	1,100	5622061
	CSCF3642N6D*	A*VC951155DXB*	33,600	25,200	15.0	12.5	1,100	5622101
	CSCF3642N6D*	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622144
	CSCF3642N6D*+EEP		34,000	25,600	14.5	12.0	1,100	5325811
	CSCF3642N6D*+EEP+TXV		34,000	25,600	14.5	12.0	1,100	5325812
	CSCF3642N6D*+MBVC1600**-1A*		33,600	25,200	15.5	12.5	1,100	5326913
	CSCF3642N6D*+MBVC1600**-1A*+TXV		33,600	25,200	15.5	12.5	1,100	5325813
	CSCF3642N6D*+MBVC2000**-1A*		34,000	25,600	15.5	12.5	1,100	5326914
	CSCF3642N6D*+MBVC2000**-1A*+TXV		34,000	25,600	15.5	12.5	1,100	5325814
	CSCF3642N6D*+TXV	A*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325898
	CSCF3642N6D*+TXV	G*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325899
	CSCF3642N6D*+TXV	A*VC81005C*B*	33,600	25,200	15.1	12.5	1,100	5325930
	CSCF3642N6D*+TXV	GME950805CXA*	33,600	25,200	14.5	12.0	1,150	5326273
	CSCF3642N6D*+TXV	A*VC950704CXB*	33,600	25,200	15.1	12.5	1,100	5621978
	CSCF3642N6D*+TXV	G*VC950704CXB*	33,600	25,200	15.1	12.5	1,100	5621979
	CSCF3642N6D*+TXV	A*VC950905CXB*	33,600	25,200	15.1	12.5	1,100	5622024
	CSCF3642N6D*+TXV	A*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622146
	CSCF3642N6D*+TXV	A*VM961005DXB*	34,000	25,600	15.1	12.5	1,100	5622264
	CSCF3642N6D*+TXV	G*VM961155DXB*	34,000	25,600	15.1	12.5	1,100	5622303
	CSCF3642N6D*+TXV	G*VM960604CXB*	34,000	25,600	14.5	12.0	1,100	5622147
	CSCF3642N6D*+TXV	A*VM960805CXB*	33,600	25,200	15.1	12.5	1,100	5622188
	CSCF3642N6D*+TXV	G*VM960805DXB*	33,600	25,200	15.1	12.5	1,100	5622227
	CSCF3642N6D*+TXV	G*E80805C*B*	33,600	25,200	15.0	12.5	1,150	5325841
	CSCF3642N6D*+TXV	G*E81005C*B*	33,600	25,200	15.0	12.5	1,150	5325849
	CSCF3642N6D*+TXV	G*VC81005C*B*	33,600	25,200	15.1	12.5	1,100	5325931
	CSCF3642N6D*+TXV	GME951005DXA*	34,000	25,600	15.1	12.5	1,150	5326288
	CSCF3642N6D*+TXV	G*VC951155DXB*	33,600	25,200	15.1	12.5	1,100	5622104
	CSCF3642N6D*+TXV	A*VC950905DXB*	33,600	25,200	15.1	12.5	1,100	5622062
	CSCF3642N6D*+TXV	A*VM960805DXB*	33,600	25,200	15.1	12.5	1,100	5622226
	CSCF3642N6D*+TXV	A*VM961155DXB*	34,000	25,600	15.1	12.5	1,100	5622302
	CSCF3642N6D*+TXV	G*VC950905DXB*	33,600	25,200	15.1	12.5	1,100	5622063
	CSCF3642N6D*+TXV	A*VC951155DXB*	33,600	25,200	15.1	12.5	1,100	5622103
	CSCF3642N6D*+TXV	G*VM960805CXB*	33,600	25,200	15.1	12.5	1,100	5622189
	CSCF3642N6D*+TXV	G*VC950905CXB*	33,600	25,200	15.1	12.5	1,100	5622025
CSCF3642N6D*+TXV	G*VM961005DXB*	34,000	25,600	15.1	12.5	1,100	5622265	
CSCF4860N6D*	G*E81005C*B*	34,000	25,600	15.0	12.5	1,150	5325850	
CSCF4860N6D*	A*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325900	
CSCF4860N6D*	GME951005DXA*	34,200	25,800	15.0	12.5	1,150	5326289	
CSCF4860N6D*	A*VC950704CXB*	34,200	25,800	15.1	12.5	1,100	5621980	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0361B* (cont.)	CSCF4860N6D*	A*VM960604CXB*	34,200	25,800	14.5	12.0	1,100	5622148
	CSCF4860N6D*	A*VC950905DXB*	34,200	25,800	15.1	12.5	1,100	5622064
	CSCF4860N6D*	G*VC950905DXB*	34,200	25,800	15.1	12.5	1,100	5622065
	CSCF4860N6D*	G*VC951155DXB*	34,200	25,800	15.1	12.5	1,100	5622107
	CSCF4860N6D*	A*VM961005DXB*	34,200	25,800	15.1	12.5	1,100	5622266
	CSCF4860N6D*	A*VM960805CXB*	34,200	25,800	15.1	12.5	1,100	5622190
	CSCF4860N6D*	G*VM960805DXB*	34,200	25,800	15.1	12.5	1,100	5622229
	CSCF4860N6D*	A*VM960805DXB*	34,200	25,800	15.1	12.5	1,100	5622228
	CSCF4860N6D*	G*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325901
	CSCF4860N6D*	G*VC81005C*B*	33,800	25,400	15.1	12.5	1,100	5325933
	CSCF4860N6D*	GME950805CXA*	34,200	25,800	14.5	12.0	1,150	5326274
	CSCF4860N6D*	G*E80805C*B*	34,000	25,600	15.0	12.5	1,150	5325842
	CSCF4860N6D*	A*VC81005C*B*	33,800	25,400	15.1	12.5	1,100	5325932
	CSCF4860N6D*	A*VC951155DXB*	34,200	25,800	15.1	12.5	1,100	5622106
	CSCF4860N6D*	G*VM960604CXB*	34,200	25,800	14.5	12.0	1,100	5622149
	CSCF4860N6D*	G*VM961155DXB*	34,200	25,800	15.1	12.5	1,100	5622305
	CSCF4860N6D*	G*VC950704CXB*	34,200	25,800	15.1	12.5	1,100	5621981
	CSCF4860N6D*	A*VC950905CXB*	34,200	25,800	15.1	12.5	1,100	5622026
	CSCF4860N6D*	G*VM960805CXB*	34,200	25,800	15.1	12.5	1,100	5622191
	CSCF4860N6D*	G*VM961005DXB*	34,200	25,800	15.1	12.5	1,100	5622267
	CSCF4860N6D*	G*VC950905CXB*	34,200	25,800	15.1	12.5	1,100	5622027
	CSCF4860N6D*	A*VM961155DXB*	34,200	25,800	15.1	12.5	1,100	5622304
	CSCF4860N6D*+EEP		34,200	25,800	14.5	12.0	1,100	5325815
	CSCF4860N6D*+EEP+TXV		34,200	25,800	14.5	12.0	1,100	5325816
	CSCF4860N6D*+MBVC1600**-1A*		34,200	25,800	15.5	12.5	1,100	5326915
	CSCF4860N6D*+MBVC1600**-1A*+TXV		34,200	25,800	15.5	12.5	1,100	5325817
	CSCF4860N6D*+MBVC2000**-1A*		34,200	25,800	15.5	12.5	1,100	5325818
	CSCF4860N6D*+MBVC2000**-1A*+TXV		34,200	25,800	15.5	12.5	1,100	5325819
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	25,600	15.0	12.5	1,150	5325851
	CSCF4860N6D*+TXV	A*VC950905CXB*	34,200	25,800	15.5	12.5	1,100	5622028
	CSCF4860N6D*+TXV	A*VC950704CXB*	34,200	25,800	15.5	12.5	1,100	5621982
	CSCF4860N6D*+TXV	G*VM960805CXB*	34,200	25,800	15.5	12.5	1,100	5622193
	CSCF4860N6D*+TXV	G*VC950905DXB*	34,200	25,800	15.5	12.5	1,100	5622067
	CSCF4860N6D*+TXV	G*VC951155DXB*	34,200	25,800	15.5	12.5	1,100	5622109
	CSCF4860N6D*+TXV	A*VM961005DXB*	34,200	25,800	15.5	12.5	1,100	5622268
	CSCF4860N6D*+TXV	G*VM961005DXB*	34,200	25,800	15.5	12.5	1,100	5622269
	CSCF4860N6D*+TXV	A*VM960805CXB*	34,200	25,800	15.5	12.5	1,100	5622192
	CSCF4860N6D*+TXV	G*VM960805DXB*	34,200	25,800	15.5	12.5	1,100	5622231
	CSCF4860N6D*+TXV	G*VC950905CXB*	34,200	25,800	15.5	12.5	1,100	5622029
	CSCF4860N6D*+TXV	A*VM961155DXB*	34,200	25,800	15.5	12.5	1,100	5622306
	CSCF4860N6D*+TXV	A*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325934
	CSCF4860N6D*+TXV	G*E80805C*B*	34,000	25,600	15.0	12.5	1,150	5325843
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325903
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,800	25,400	15.5	12.5	1,100	5325935
	CSCF4860N6D*+TXV	GME951005DXA*	33,800	25,400	15.1	12.5	1,150	5326290
	CSCF4860N6D*+TXV	A*VM960604CXB*	34,200	25,800	14.5	12.0	1,100	5622150
	CSCF4860N6D*+TXV	A*VC950905DXB*	34,200	25,800	15.5	12.5	1,100	5622066
	CSCF4860N6D*+TXV	A*VC951155DXB*	34,200	25,800	15.5	12.5	1,100	5622108
	CSCF4860N6D*+TXV	G*VC950704CXB*	34,200	25,800	15.5	12.5	1,100	5621983
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,800	25,400	15.0	12.5	1,100	5325902
CSCF4860N6D*+TXV	GME950805CXA*	34,200	25,800	14.5	12.0	1,150	5326275	
CSCF4860N6D*+TXV	G*VM960604CXB*	34,200	25,800	14.5	12.0	1,100	5622151	
CSCF4860N6D*+TXV	A*VM960805DXB*	34,200	25,800	15.5	12.5	1,100	5622230	
CSCF4860N6D*+TXV	G*VM961155DXB*	34,200	25,800	15.5	12.5	1,100	5622307	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A*	ASPF426016E*+TXV		39,500	29,400	16.0	13.0	1,400	4358278
	AVPTC426014A*		39,500	29,400	16.0	13.0	1,475	4431269
	CA*F3743*6D*	GME950805CXA*	38,000	28,200	14.0	12.0	1,350	5328553
	CA*F3743*6D*	GME951005DXA*	38,000	28,200	14.5	12.0	1,350	5328525
	CA*F3743*6D*	A*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622420
	CA*F3743*6D*	G*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622421
	CA*F3743*6D*	G*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622355
	CA*F3743*6D*	A*VC951155DXB*	38,000	28,200	14.5	12.0	1,300	5622386
	CA*F3743*6D*	G*VC951155DXB*	38,000	28,200	14.5	12.0	1,300	5622387
	CA*F3743*6D*	G*VM961155DXB*	38,000	28,200	14.5	12.0	1,300	5622485
	CA*F3743*6D*	G*E80805C*B*	38,000	28,200	14.5	12.0	1,350	5328340
	CA*F3743*6D*	G*VC80805C*B*	38,000	28,200	14.5	12.0	1,250	5328363
	CA*F3743*6D*	ADVC80805C*B*	38,000	28,200	14.5	12.0	1,300	5328510
	CA*F3743*6D*	G*E81005C*B*	38,000	28,200	14.0	12.0	1,350	5328351
	CA*F3743*6D*	A*VC81005C*B*	38,000	28,200	14.5	12.0	1,300	5328384
	CA*F3743*6D*	A*VC80805C*B*	38,000	28,200	14.5	12.0	1,250	5328362
	CA*F3743*6D*	G*VC81005C*B*	38,000	28,200	14.5	12.0	1,300	5328385
	CA*F3743*6D*	A*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622308
	CA*F3743*6D*	G*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622309
	CA*F3743*6D*	A*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622354
	CA*F3743*6D*	A*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622458
	CA*F3743*6D*	G*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622459
	CA*F3743*6D*	A*VM961155DXB*	38,000	28,200	14.5	12.0	1,300	5622484
	CA*F3743*6D*+EEP		37,600	28,000	13.5	11.5	1,300	5328329
	CA*F3743*6D*+EEP+TXV		37,600	28,000	14.0	11.5	1,300	5328336
	CA*F3743*6D*+MBVC2000**-1A*		38,000	28,200	15.5	13.0	1,300	5328499
	CA*F3743*6D*+MBVC2000**-1A*+TXV		38,000	28,200	16.0	13.0	1,300	5328506
	CA*F3743*6D*+TXV	A*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328376
	CA*F3743*6D*+TXV	G*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328377
	CA*F3743*6D*+TXV	G*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328399
	CA*F3743*6D*+TXV	G*E81005C*B*	38,000	28,200	15.0	12.5	1,350	5328358
	CA*F3743*6D*+TXV	A*VC950905DXB*	38,000	28,200	15.0	12.5	1,300	5622356
	CA*F3743*6D*+TXV	A*VM960805CXB*	38,000	28,200	15.0	12.5	1,300	5622422
	CA*F3743*6D*+TXV	A*VM961005DXB*	38,000	28,200	15.0	12.5	1,300	5622460
	CA*F3743*6D*+TXV	A*VC950704CXB*	38,000	28,200	14.5	12.0	1,300	5622310
	CA*F3743*6D*+TXV	G*VM960805CXB*	38,000	28,200	15.0	12.5	1,300	5622423
	CA*F3743*6D*+TXV	G*VM961005DXB*	38,000	28,200	15.0	12.5	1,300	5622461
	CA*F3743*6D*+TXV	ADVC80805C*B*	38,000	28,200	15.0	12.5	1,300	5328517
	CA*F3743*6D*+TXV	GME950805CXA*	38,000	28,200	14.5	12.0	1,350	5328522
	CA*F3743*6D*+TXV	GME951005DXA*	38,000	28,200	15.0	12.5	1,350	5328531
	CA*F3743*6D*+TXV	G*E80805C*B*	38,000	28,200	15.0	12.5	1,350	5328347
	CA*F3743*6D*+TXV	A*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328398
	CA*F3743*6D*+TXV	A*VC951155DXB*	38,000	28,200	15.5	12.5	1,300	5622388
	CA*F3743*6D*+TXV	G*VC950704CXB*	38,000	28,200	14.5	12.0	1,300	5622311
	CA*F3743*6D*+TXV	G*VC950905DXB*	38,000	28,200	15.0	12.5	1,300	5622357
	CA*F3743*6D*+TXV	A*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622486
	CA*F3743*6D*+TXV	G*VC951155DXB*	38,000	28,200	15.5	12.5	1,300	5622389
	CA*F3743*6D*+TXV	G*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622487
	CA*F4860*6D*	G*E81005C*B*	38,000	28,200	14.0	12.0	1,350	5328352
	CA*F4860*6D*	GME951005DXA*	38,000	28,200	15.0	12.5	1,350	5328526
	CA*F4860*6D*	G*E80805C*B*	38,000	28,200	14.5	12.0	1,350	5328341
	CA*F4860*6D*	G*VM961155DXB*	38,000	28,200	14.5	12.0	1,300	5622489
CA*F4860*6D*	A*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622424	

See Notes on Page 53.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A* (cont.)	CA*F4860*6D*	G*VC951155DXB*	38,000	28,200	14.5	12.0	1,300	5622391
	CA*F4860*6D*	A*VC81005C*B*	38,000	28,200	14.5	12.0	1,300	5328386
	CA*F4860*6D*	A*VC80805C*B*	38,500	28,600	14.5	12.0	1,250	5328364
	CA*F4860*6D*	G*VC81005C*B*	38,000	28,200	14.5	12.0	1,300	5328387
	CA*F4860*6D*	ADVC80805C*B*	38,000	28,200	14.5	12.0	1,300	5328511
	CA*F4860*6D*	G*VC80805C*B*	38,500	28,600	14.5	12.0	1,250	5328365
	CA*F4860*6D*	A*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622312
	CA*F4860*6D*	A*VM961155DXB*	38,000	28,200	14.5	12.0	1,300	5622488
	CA*F4860*6D*	A*VC951155DXB*	38,000	28,200	14.5	12.0	1,300	5622390
	CA*F4860*6D*	G*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622313
	CA*F4860*6D*	A*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622358
	CA*F4860*6D*	G*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622463
	CA*F4860*6D*	G*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622359
	CA*F4860*6D*	G*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622425
	CA*F4860*6D*	A*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622462
	CA*F4860*6D*	GME950805CXA*	38,000	28,200	14.0	12.0	1,350	5328554
	CA*F4860*6D*+EEP		38,000	28,200	13.5	11.5	1,300	5328330
	CA*F4860*6D*+EEP+TXV		39,000	29,000	14.5	12.2	1,400	4559595
	CA*F4860*6D*+MBVC2000**-1A*		38,000	28,200	15.0	13.0	1,300	5328500
	CA*F4860*6D*+MBVC2000**-1A*+TXV		39,000	29,000	16.0	13.0	1,440	3880344
	CA*F4860*6D*+TXV	G*VC91155DXA*	38,500	28,600	16.0	13.0	1,440	3880572
	CA*F4860*6D*+TXV	G*E81005C*B*	38,500	28,600	15.0	12.5	1,420	5038843
	CA*F4860*6D*+TXV	G*VC80604B*B*	38,500	28,600	15.0	12.5	1,400	5038844
	CA*F4860*6D*+TXV	GME951005DXA*	38,500	28,600	15.5	12.5	1,440	4703715
	CA*F4860*6D*+TXV	GME950805CXA*	38,000	28,200	15.0	12.5	1,400	4703762
	CA*F4860*6D*+TXV	ADVC81005C*B*	38,500	28,600	15.5	12.7	1,410	5038909
	CA*F4860*6D*+TXV	G*E80805C*B*	38,500	28,600	15.5	12.7	1,350	5039024
	CA*F4860*6D*+TXV	G*E80603B*B*	38,500	28,600	15.0	12.5	1,360	5039160
	CA*F4860*6D*+TXV	ADVC80805C*B*	38,500	28,600	15.5	12.7	1,380	5039259
	CA*F4860*6D*+TXV	A*VC950714CXB*	38,500	28,600	15.0	12.5	1,400	5622338
	CA*F4860*6D*+TXV	A*VC950905DXB*	39,000	29,000	15.0	12.5	1,400	5622360
	CA*F4860*6D*+TXV	G*VC950905DXB*	38,500	28,600	15.0	12.5	1,400	5622361
	CA*F4860*6D*+TXV	A*VM960805DXB*	39,000	29,000	15.0	12.5	1,400	5622450
	CA*F4860*6D*+TXV	G*VM960805DXB*	38,500	28,600	15.0	12.5	1,400	5622451
	CA*F4860*6D*+TXV	A*VC950704CXB*	38,500	28,600	15.0	12.5	1,400	5622314
	CA*F4860*6D*+TXV	G*VM960604CXB*	38,500	28,600	15.0	12.5	1,440	5622413
	CA*F4860*6D*+TXV	G*VC950905CXB*	38,500	28,600	15.5	13.0	1,400	5622345
	CA*F4860*6D*+TXV	A*VC81005C*B*	38,500	28,600	15.5	12.7	1,370	5038889
	CA*F4860*6D*+TXV	G*VC80805C*B*	38,500	28,600	15.5	12.7	1,400	5039034
	CA*F4860*6D*+TXV	G*VM961005DXB*	39,000	29,000	16.0	13.0	1,440	5622465
	CA*F4860*6D*+TXV	A*VM961155DXB*	39,000	29,000	16.0	13.0	1,440	5622490
	CA*F4860*6D*+TXV	G*VC81005C*B*	38,500	28,600	15.5	12.7	1,370	5038908
	CA*F4860*6D*+TXV	A*VC80805C*B*	38,500	28,600	15.5	12.7	1,400	5039179
	CA*F4860*6D*+TXV	A*VC80604B*B*	38,500	28,600	15.0	12.5	1,400	5039045
	CA*F4860*6D*+TXV	A*VC950905CXB*	38,500	28,600	15.5	13.0	1,400	5622344
CA*F4860*6D*+TXV	A*VM960805CXB*	38,500	28,600	15.5	13.0	1,400	5622426	
CA*F4860*6D*+TXV	G*VC950704CXB*	38,500	28,600	15.0	12.5	1,440	5622315	
CA*F4860*6D*+TXV	G*VC951155DXB*	39,000	29,000	16.0	13.0	1,440	5622393	
CA*F4860*6D*+TXV	G*VM961155DXB*	39,000	29,000	16.0	13.0	1,440	5622491	
CA*F4860*6D*+TXV	G*VC950714CXB*	38,500	28,600	15.0	12.5	1,440	5622339	
CA*F4860*6D*+TXV	G*VC950915DXB*	38,500	28,600	15.0	12.5	1,400	5622381	
CA*F4860*6D*+TXV	G*VM960805CXB*	38,500	28,600	15.5	13.0	1,400	5622427	
CA*F4860*6D*+TXV	A*VC950915DXB*	39,000	29,000	15.0	12.5	1,400	5622380	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A* (cont.)	CA*F4860*6D*+TXV	A*VC951155DXB*	39,000	29,000	16.0	13.0	1,440	5622392
	CA*F4860*6D*+TXV	A*VM960604CXB*	38,500	28,600	15.0	12.5	1,400	5622412
	CA*F4860*6D*+TXV	A*VM961005DXB*	39,000	29,000	16.0	13.0	1,440	5622464
	CA*F4961*6D*	A*VC80805C*B*	38,500	28,600	15.0	12.5	1,250	5328366
	CA*F4961*6D*	GME951005DXA*	38,500	28,600	15.0	12.5	1,350	5328527
	CA*F4961*6D*	G*E81005C*B*	38,500	28,600	14.5	12.0	1,350	5328353
	CA*F4961*6D*	G*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622363
	CA*F4961*6D*	A*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622394
	CA*F4961*6D*	G*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622395
	CA*F4961*6D*	G*E80805C*B*	38,500	28,600	15.0	12.5	1,350	5328342
	CA*F4961*6D*	G*VC80805C*B*	38,500	28,600	15.0	12.5	1,250	5328367
	CA*F4961*6D*	A*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328388
	CA*F4961*6D*	GME950805CXA*	38,500	28,600	14.0	12.5	1,350	5328555
	CA*F4961*6D*	G*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328389
	CA*F4961*6D*	ADVC80805C*B*	38,500	28,600	15.0	12.5	1,300	5328512
	CA*F4961*6D*	G*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622429
	CA*F4961*6D*	G*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622493
	CA*F4961*6D*	A*VC950704CXB*	38,500	28,600	14.5	12.5	1,300	5622316
	CA*F4961*6D*	G*VC950704CXB*	38,500	28,600	14.5	12.5	1,300	5622317
	CA*F4961*6D*	A*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622428
	CA*F4961*6D*	G*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622467
	CA*F4961*6D*	A*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622362
	CA*F4961*6D*	A*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622492
	CA*F4961*6D*	A*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622466
	CA*F4961*6D*+EEP		38,000	28,200	13.5	11.5	1,300	5328331
	CA*F4961*6D*+EEP+TXV		39,000	29,000	14.5	12.2	1,400	4431657
	CA*F4961*6D*+MBVC2000**-1A*		38,500	28,600	15.5	13.0	1,300	5328501
	CA*F4961*6D*+MBVC2000**-1A*+TXV		40,000	29,800	16.0	13.0	1,440	4431677
	CA*F4961*6D*+TXV	GME951005DXA*	39,000	29,000	15.5	12.5	1,440	4703717
	CA*F4961*6D*+TXV	A*VC80604B*B*	39,000	29,000	15.0	12.5	1,400	5039141
	CA*F4961*6D*+TXV	A*VC81005C*B*	39,500	29,400	15.5	12.7	1,480	5038877
	CA*F4961*6D*+TXV	G*VC80805C*B*	39,500	29,400	15.5	12.7	1,400	5039242
	CA*F4961*6D*+TXV	GME950805CXA*	39,000	29,000	15.0	12.5	1,400	4703764
	CA*F4961*6D*+TXV	A*VC950714CXB*	39,500	29,400	15.0	12.5	1,440	5622340
	CA*F4961*6D*+TXV	A*VC950905CXB*	39,500	29,400	15.5	13.0	1,400	5622346
	CA*F4961*6D*+TXV	A*VC950704CXB*	39,500	29,400	15.0	12.5	1,440	5622318
	CA*F4961*6D*+TXV	G*VC950714CXB*	39,500	29,400	15.0	12.5	1,440	5622341
	CA*F4961*6D*+TXV	A*VC950905DXB*	39,500	29,400	15.5	12.7	1,400	5622364
	CA*F4961*6D*+TXV	G*E81005C*B*	39,000	29,000	15.0	12.5	1,420	5038859
	CA*F4961*6D*+TXV	A*VC951155DXB*	39,500	29,400	16.0	13.0	1,440	5622396
	CA*F4961*6D*+TXV	ADVC80805C*B*	39,500	29,400	15.5	12.7	1,380	5038961
	CA*F4961*6D*+TXV	G*VM960805DXB*	39,500	29,400	15.5	12.7	1,400	5622453
	CA*F4961*6D*+TXV	A*VM961005DXB*	39,500	29,400	16.0	13.0	1,440	5622468
	CA*F4961*6D*+TXV	G*E80805C*B*	39,000	29,000	15.5	12.7	1,350	5039043
	CA*F4961*6D*+TXV	A*VC80805C*B*	39,500	29,400	15.5	12.7	1,400	5038963
	CA*F4961*6D*+TXV	ADVC81005C*B*	39,500	29,400	15.5	12.7	1,410	5038995
	CA*F4961*6D*+TXV	G*VC80604B*B*	39,000	29,000	15.0	12.5	1,400	5039044
	CA*F4961*6D*+TXV	G*VC81005C*B*	39,500	29,400	15.5	12.7	1,480	5039161
	CA*F4961*6D*+TXV	G*E80603B*B*	39,000	29,000	15.0	12.3	1,360	5039241
	CA*F4961*6D*+TXV	G*VM960805CXB*	39,500	29,400	15.5	13.0	1,400	5622431
CA*F4961*6D*+TXV	G*VC950704CXB*	39,500	29,400	15.0	12.5	1,440	5622319	
CA*F4961*6D*+TXV	G*VC950915DXB*	39,500	29,400	15.5	12.7	1,400	5622383	
CA*F4961*6D*+TXV	G*VC950905CXB*	39,500	29,400	15.5	13.0	1,400	5622347	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CA*F4961*6D*+TXV	G*VC950905DXB*	39,500	29,400	15.5	12.7	1,400	5622365
	CA*F4961*6D*+TXV	G*VC951155DXB*	39,500	29,400	16.0	13.0	1,440	5622397
	CA*F4961*6D*+TXV	A*VM960805DXB*	39,500	29,400	15.5	12.7	1,400	5622452
	CA*F4961*6D*+TXV	G*VM961155DXB*	39,500	29,400	16.0	13.0	1,440	5622495
	CA*F4961*6D*+TXV	A*VM960604CXB*	39,500	29,400	15.0	12.5	1,440	5622414
	CA*F4961*6D*+TXV	G*VM960604CXB*	39,500	29,400	15.0	12.5	1,440	5622415
	CA*F4961*6D*+TXV	A*VM960805CXB*	39,500	29,400	15.5	13.0	1,400	5622430
	CA*F4961*6D*+TXV	G*VM961005DXB*	39,500	29,400	16.0	13.0	1,440	5622469
	CA*F4961*6D*+TXV	A*VC950915DXB*	39,500	29,400	15.5	12.7	1,400	5622382
	CA*F4961*6D*+TXV	A*VM961155DXB*	39,500	29,400	16.0	13.0	1,440	5622494
	CAPT4961*4A*	G*VC80805C*B*	39,500	29,400	15.5	12.5	1,265	5520732
	CAPT4961*4A*	A*VC80604B*B*	39,000	29,000	15.0	12.5	1,265	5520713
	CAPT4961*4A*	G*E80603B*B*	39,000	29,000	15.0	12.3	1,300	5520728
	CAPT4961*4A*	A*VC950704CXB*	39,500	29,400	15.0	12.5	1,350	5622320
	CAPT4961*4A*	G*VC950714CXB*	39,500	29,400	15.0	12.5	1,350	5622343
	CAPT4961*4A*	A*VC950905DXB*	39,500	29,400	15.5	12.5	1,320	5622366
	CAPT4961*4A*	G*VC950905DXB*	39,500	29,400	15.5	12.5	1,320	5622367
	CAPT4961*4A*	G*VM961155DXB*	39,500	29,400	16.0	13.0	1,275	5622497
	CAPT4961*4A*	G*VM961005DXB*	39,500	29,400	16.0	13.0	1,280	5622471
	CAPT4961*4A*	A*VC950714CXB*	39,500	29,400	15.0	12.5	1,350	5622342
	CAPT4961*4A*	A*VM961155DXB*	39,500	29,400	16.0	13.0	1,275	5622496
	CAPT4961*4A*	G*E80805C*B*	39,000	29,000	15.5	12.5	1,300	5520729
	CAPT4961*4A*	G*VC80604B*B*	39,000	29,000	15.0	12.5	1,265	5520731
	CAPT4961*4A*	A*VC80805C*B*	39,500	29,400	15.5	12.5	1,265	5520714
	CAPT4961*4A*	ADVC80805C*B*	39,500	29,400	15.5	12.5	1,265	5520726
	CAPT4961*4A*	G*E81005C*B*	39,000	29,000	15.0	12.5	1,300	5520730
SSX16	CAPT4961*4A*	G*VM960604CXB*	39,500	29,400	14.5	12.5	1,325	5622417
0421A*	CAPT4961*4A*	G*VC950915DXB*	39,500	29,400	15.5	12.5	1,280	5622385
(cont.)	CAPT4961*4A*	G*VC950704CXB*	39,500	29,400	15.0	12.5	1,350	5622321
	CAPT4961*4A*	A*VC950915DXB*	39,500	29,400	15.5	12.5	1,280	5622384
	CAPT4961*4A*	A*VM960604CXB*	39,500	29,400	14.5	12.5	1,325	5622416
	CAPT4961*4A*	G*VM960805DXB*	39,500	29,400	15.5	12.5	1,300	5622455
	CAPT4961*4A*	A*VM960805CXB*	39,500	29,400	15.5	13.0	1,280	5622432
	CAPT4961*4A*	G*VM960805CXB*	39,500	29,400	15.5	13.0	1,280	5622433
	CAPT4961*4A*	A*VC950905CXB*	39,500	29,400	15.5	13.0	1,280	5622348
	CAPT4961*4A*	G*VC950905CXB*	39,500	29,400	15.5	13.0	1,280	5622349
	CAPT4961*4A*	A*VC951155DXB*	39,500	29,400	16.0	13.0	1,275	5622398
	CAPT4961*4A*	A*VM961005DXB*	39,500	29,400	16.0	13.0	1,280	5622470
	CAPT4961*4A*	A*VC81005C*B*	39,500	29,400	15.5	12.5	1,270	5520715
	CAPT4961*4A*	ADVC81005C*B*	39,500	29,400	15.5	12.5	1,270	5520727
	CAPT4961*4A*	G*VC81005C*B*	39,500	29,400	15.5	12.5	1,270	5520733
	CAPT4961*4A*	GME950805CXA*	39,000	29,000	15.0	12.5	1,300	5520744
	CAPT4961*4A*	GME951005DXA*	39,000	29,000	15.5	12.5	1,300	5520745
	CAPT4961*4A*	G*VC951155DXB*	39,500	29,400	16.0	13.0	1,275	5622399
	CAPT4961*4A*	A*VM960805DXB*	39,500	29,400	15.5	12.5	1,300	5622454
	CAPT4961*4A*+EEP		39,000	29,000	14.5	12.0	1,300	5520746
	CAPT4961*4A*+MBVC1600**-1A*		39,000	29,000	15.0	12.5	1,370	5611385
	CAPT4961*4A*+MBVC2000**-1A*		40,000	29,800	16.0	13.0	1,310	5527438
	CHPF3743C6B*	G*E80805C*B*	38,000	28,200	14.5	12.0	1,350	5328343
	CHPF3743C6B*	A*VC81005C*B*	38,000	28,200	15.0	12.5	1,300	5328390
	CHPF3743C6B*	G*E81005C*B*	38,500	28,600	14.0	12.0	1,350	5328354
	CHPF3743C6B*	GME950805CXA*	38,000	28,200	14.0	12.0	1,300	5328521
	CHPF3743C6B*	A*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328368
	CHPF3743C6B*	G*VC81005C*B*	38,000	28,200	15.0	12.5	1,300	5328391
	CHPF3743C6B*	A*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622434

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A* (cont.)	CHPF3743C6B*	G*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328369
	CHPF3743C6B*	A*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622322
	CHPF3743C6B*	G*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622323
	CHPF3743C6B*	G*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622435
	CHPF3743C6B*+EEP		37,600	28,000	13.5	11.5	1,300	5328332
	CHPF3743C6B*+EEP+TXV		37,600	28,000	14.0	11.5	1,300	5328337
	CHPF3743C6B*+MBVC2000**-1A*		39,000	29,000	15.0	12.5	1,300	5328502
	CHPF3743C6B*+MBVC2000**-1A*+TXV		39,000	29,000	16.0	13.0	1,300	5328507
	CHPF3743C6B*+TXV	G*E81005C*B*	38,500	28,600	15.0	12.5	1,350	5328359
	CHPF3743C6B*+TXV	A*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328400
	CHPF3743C6B*+TXV	A*VC950704CXB*	38,000	28,200	15.0	12.5	1,300	5622324
	CHPF3743C6B*+TXV	G*VC950704CXB*	38,000	28,200	15.0	12.5	1,300	5622325
	CHPF3743C6B*+TXV	G*E80805C*B*	38,000	28,200	15.0	12.5	1,350	5328348
	CHPF3743C6B*+TXV	A*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328378
	CHPF3743C6B*+TXV	G*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328379
	CHPF3743C6B*+TXV	GME950805CXA*	38,000	28,200	15.0	12.5	1,300	5328523
	CHPF3743C6B*+TXV	G*VM960805CXB*	38,000	28,200	15.5	12.5	1,300	5622437
	CHPF3743C6B*+TXV	A*VM960805CXB*	38,000	28,200	15.5	12.5	1,300	5622436
	CHPF3743C6B*+TXV	G*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328401
	CHPF3743D6B*	GME950805CXA*	38,000	28,200	14.0	12.0	1,350	5328556
	CHPF3743D6B*	G*VC951155DXB*	38,000	28,200	15.0	12.5	1,300	5622401
	CHPF3743D6B*	G*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622499
	CHPF3743D6B*	G*E80805C*B*	38,000	28,200	14.5	12.0	1,350	5328344
	CHPF3743D6B*	A*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328370
	CHPF3743D6B*	G*E81005C*B*	38,000	28,200	14.5	12.0	1,350	5328355
	CHPF3743D6B*	A*VC81005C*B*	38,000	28,200	15.0	12.5	1,300	5328392
	CHPF3743D6B*	GME951005DXA*	38,000	28,200	14.5	12.5	1,350	5328528
	CHPF3743D6B*	G*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328371
	CHPF3743D6B*	A*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622326
	CHPF3743D6B*	G*VC950704CXB*	38,000	28,200	14.0	12.0	1,300	5622327
	CHPF3743D6B*	A*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622368
	CHPF3743D6B*	G*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622439
	CHPF3743D6B*	A*VC951155DXB*	38,000	28,200	15.0	12.5	1,300	5622400
	CHPF3743D6B*	G*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622473
	CHPF3743D6B*	A*VM961005DXB*	38,000	28,200	14.5	12.0	1,300	5622472
	CHPF3743D6B*	G*VC81005C*B*	38,000	28,200	15.0	12.5	1,300	5328393
	CHPF3743D6B*	G*VC950905DXB*	38,000	28,200	14.5	12.0	1,300	5622369
	CHPF3743D6B*	A*VM960805CXB*	38,000	28,200	14.5	12.0	1,300	5622438
	CHPF3743D6B*	A*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622498
	CHPF3743D6B*+EEP		37,600	28,000	13.5	11.5	1,300	5328333
	CHPF3743D6B*+EEP+TXV		37,600	28,000	14.0	11.5	1,300	5328338
	CHPF3743D6B*+MBVC2000**-1A*		38,000	28,200	15.5	13.0	1,300	5328503
	CHPF3743D6B*+MBVC2000**-1A*+TXV		38,000	28,200	16.0	13.0	1,300	5328508
	CHPF3743D6B*+TXV	A*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328380
	CHPF3743D6B*+TXV	GME951005DXA*	38,000	28,200	15.5	12.5	1,350	5328532
	CHPF3743D6B*+TXV	A*VC950704CXB*	38,000	28,200	14.5	12.0	1,300	5622328
CHPF3743D6B*+TXV	A*VC950905DXB*	38,000	28,200	15.0	12.5	1,300	5622370	
CHPF3743D6B*+TXV	A*VM960805CXB*	38,000	28,200	15.0	12.5	1,300	5622440	
CHPF3743D6B*+TXV	G*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622501	
CHPF3743D6B*+TXV	G*VC950905DXB*	38,000	28,200	15.0	12.5	1,300	5622371	
CHPF3743D6B*+TXV	G*E80805C*B*	38,000	28,200	15.0	12.5	1,350	5328349	
CHPF3743D6B*+TXV	A*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328402	
CHPF3743D6B*+TXV	G*E81005C*B*	38,000	28,200	15.0	12.5	1,350	5328360	
CHPF3743D6B*+TXV	GME950805CXA*	38,000	28,200	14.5	12.0	1,350	5328552	
CHPF3743D6B*+TXV	G*VC80805C*B*	38,000	28,200	15.5	12.5	1,250	5328381	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A* (cont.)	CHPF3743D6B*+TXV	G*VC81005C*B*	38,000	28,200	15.5	12.5	1,300	5328403
	CHPF3743D6B*+TXV	A*VC951155DXB*	38,000	28,200	15.5	12.5	1,300	5622402
	CHPF3743D6B*+TXV	A*VM961005DXB*	38,000	28,200	15.0	12.5	1,300	5622474
	CHPF3743D6B*+TXV	G*VM961005DXB*	38,000	28,200	15.0	12.5	1,300	5622475
	CHPF3743D6B*+TXV	G*VC950704CXB*	38,000	28,200	14.5	12.0	1,300	5622329
	CHPF3743D6B*+TXV	G*VM960805CXB*	38,000	28,200	15.0	12.5	1,300	5622441
	CHPF3743D6B*+TXV	G*VC951155DXB*	38,000	28,200	15.5	12.5	1,300	5622403
	CHPF3743D6B*+TXV	A*VM961155DXB*	38,000	28,200	15.0	12.5	1,300	5622500
	CHPF4860D6D*	G*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328395
	CHPF4860D6D*	A*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328394
	CHPF4860D6D*	A*VC950704CXB*	38,500	28,600	14.0	12.5	1,300	5622330
	CHPF4860D6D*	A*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622372
	CHPF4860D6D*	G*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622503
	CHPF4860D6D*	G*E80805C*B*	38,500	28,600	15.0	12.5	1,350	5328345
	CHPF4860D6D*	G*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328373
	CHPF4860D6D*	GME951005DXA*	38,500	28,600	15.0	12.5	1,350	5328529
	CHPF4860D6D*	G*E81005C*B*	38,500	28,600	14.5	12.0	1,350	5328356
	CHPF4860D6D*	A*VC80805C*B*	38,000	28,200	15.0	12.5	1,250	5328372
	CHPF4860D6D*	G*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622443
	CHPF4860D6D*	A*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622404
	CHPF4860D6D*	G*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622405
	CHPF4860D6D*	A*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622476
	CHPF4860D6D*	G*VC950704CXB*	38,500	28,600	14.0	12.5	1,300	5622331
	CHPF4860D6D*	GME950805CXA*	38,500	28,600	14.0	12.0	1,350	5328557
	CHPF4860D6D*	G*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622373
	CHPF4860D6D*	A*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622442
	CHPF4860D6D*	G*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622477
	CHPF4860D6D*	A*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622502
	CHPF4860D6D*+EEP		38,000	28,200	13.5	11.5	1,300	5328334
	CHPF4860D6D*+EEP+TXV		39,500	29,400	14.5	12.2	1,400	3835185
	CHPF4860D6D*+MBVC2000**-1A*		38,500	28,600	15.5	13.0	1,300	5328504
	CHPF4860D6D*+MBVC2000**-1A*+TXV		39,500	29,400	16.0	13.0	1,400	3835187
	CHPF4860D6D*+TXV	A*VC80805C*B*	39,000	29,000	15.5	12.7	1,400	5038878
	CHPF4860D6D*+TXV	G*E80805C*B*	38,500	28,600	15.5	12.7	1,440	5039138
	CHPF4860D6D*+TXV	G*VC81005C*B*	38,500	28,600	15.5	12.7	1,440	5039162
	CHPF4860D6D*+TXV	G*E80603B*B*	38,500	28,600	15.0	12.3	1,360	5039137
	CHPF4860D6D*+TXV	GME951005DXA*	38,000	28,200	14.5	12.0	1,425	4703728
	CHPF4860D6D*+TXV	A*VC950704CXB*	38,500	28,600	15.0	12.5	1,440	5622332
	CHPF4860D6D*+TXV	G*VC951155DXB*	38,500	28,600	15.0	12.5	1,440	5622407
	CHPF4860D6D*+TXV	G*VM961005DXB*	38,500	28,600	15.0	12.5	1,440	5622479
	CHPF4860D6D*+TXV	G*VM960805DXB*	39,000	29,000	15.0	12.5	1,400	5622457
	CHPF4860D6D*+TXV	G*VM961155DXB*	38,500	28,600	15.0	12.5	1,440	5622505
	CHPF4860D6D*+TXV	G*VC950704CXB*	38,500	28,600	15.0	12.5	1,440	5622333
	CHPF4860D6D*+TXV	A*VC950905DXB*	38,500	28,600	15.0	12.5	1,400	5622374
	CHPF4860D6D*+TXV	A*VM960805CXB*	39,000	29,000	15.5	13.0	1,400	5622444
	CHPF4860D6D*+TXV	G*VM960805CXB*	39,000	29,000	15.5	13.0	1,400	5622445
	CHPF4860D6D*+TXV	A*VM960805DXB*	38,500	28,600	15.0	12.5	1,400	5622456
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,500	28,600	15.5	12.7	1,440	5038862
	CHPF4860D6D*+TXV	G*VC80805C*B*	39,000	29,000	15.5	12.7	1,400	5039140
	CHPF4860D6D*+TXV	A*VC80604B*B*	38,500	28,600	15.0	12.5	1,400	5039142
	CHPF4860D6D*+TXV	GME950805CXA*	38,500	28,600	15.0	12.5	1,400	4703765
	CHPF4860D6D*+TXV	G*VC80604B*B*	38,500	28,600	15.0	12.5	1,400	5039139
CHPF4860D6D*+TXV	A*VC950905CXB*	39,000	29,000	15.5	13.0	1,400	5622350	
CHPF4860D6D*+TXV	A*VC951155DXB*	38,500	28,600	15.0	12.5	1,440	5622406	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0421A* (cont.)	CHPF4860D6D*+TXV	A*VM961005DXB*	38,500	28,600	15.0	12.5	1,440	5622478
	CHPF4860D6D*+TXV	G*VC950905CXB*	39,000	29,000	15.5	13.0	1,400	5622351
	CHPF4860D6D*+TXV	G*VC950905DXB*	39,000	29,000	15.0	12.5	1,400	5622375
	CHPF4860D6D*+TXV	A*VM960604CXB*	38,500	28,600	15.0	12.5	1,440	5622418
	CHPF4860D6D*+TXV	G*VM960604CXB*	38,500	28,600	15.0	12.5	1,440	5622419
	CHPF4860D6D*+TXV	A*VM961155DXB*	38,500	28,600	15.0	12.5	1,440	5622504
	CHPF4860D6D*+TXV	G*E81005C*B*	38,500	28,600	15.0	12.5	1,420	5038962
	CSCF4860N6D*	G*VC80805C*B*	38,500	28,600	15.0	12.5	1,250	5328375
	CSCF4860N6D*	G*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328397
	CSCF4860N6D*	G*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622409
	CSCF4860N6D*	A*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622446
	CSCF4860N6D*	A*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622506
	CSCF4860N6D*	G*VM960805CXB*	38,500	28,600	14.5	12.0	1,300	5622447
	CSCF4860N6D*	G*VM961155DXB*	38,500	28,600	15.0	12.5	1,300	5622507
	CSCF4860N6D*	GME950805CXA*	38,500	28,600	14.0	12.0	1,350	5328558
	CSCF4860N6D*	A*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328396
	CSCF4860N6D*	GME951005DXA*	38,500	28,600	14.5	12.5	1,350	5328530
	CSCF4860N6D*	A*VC951155DXB*	38,500	28,600	15.0	12.5	1,300	5622408
	CSCF4860N6D*	A*VC950704CXB*	38,500	28,600	14.5	12.5	1,300	5622334
	CSCF4860N6D*	G*VC950704CXB*	38,500	28,600	14.5	12.5	1,300	5622335
	CSCF4860N6D*	G*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622377
	CSCF4860N6D*	A*VM961005DXB*	38,500	28,600	14.5	12.0	1,300	5622480
	CSCF4860N6D*	A*VC950905DXB*	38,500	28,600	14.5	12.0	1,300	5622376
	CSCF4860N6D*	G*VM961005DXB*	38,500	28,600	14.5	12.0	1,300	5622481
	CSCF4860N6D*	G*E80805C*B*	38,500	28,600	15.0	12.5	1,350	5328346
	CSCF4860N6D*	G*E81005C*B*	38,500	28,600	14.5	12.0	1,350	5328357
	CSCF4860N6D*	A*VC80805C*B*	38,500	28,600	15.0	12.5	1,250	5328374
	CSCF4860N6D*+EEP		38,000	28,200	13.5	11.5	1,300	5328335
	CSCF4860N6D*+EEP+TXV		38,000	28,200	14.5	12.0	1,300	5328339
	CSCF4860N6D*+MBVC2000**-1A*		38,500	28,600	15.5	13.0	1,300	5328505
	CSCF4860N6D*+MBVC2000**-1A*+TXV		38,500	28,600	16.0	13.0	1,300	5328509
	CSCF4860N6D*+TXV	G*E81005C*B*	38,500	28,600	15.0	12.5	1,350	5328361
	CSCF4860N6D*+TXV	A*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328404
	CSCF4860N6D*+TXV	G*VC81005C*B*	38,500	28,600	15.0	12.5	1,300	5328405
	CSCF4860N6D*+TXV	A*VC950905DXB*	39,500	29,400	15.5	13.0	1,450	5622378
	CSCF4860N6D*+TXV	G*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622483
	CSCF4860N6D*+TXV	A*VC950905CXB*	39,500	29,400	15.0	13.0	1,450	5622352
	CSCF4860N6D*+TXV	A*VM961155DXB*	38,500	28,600	15.5	12.5	1,300	5622508
	CSCF4860N6D*+TXV	G*VC80805C*B*	38,500	28,600	15.5	12.5	1,250	5328383
	CSCF4860N6D*+TXV	G*E80805C*B*	38,500	28,600	15.0	12.5	1,350	5328350
	CSCF4860N6D*+TXV	GME951005DXA*	38,500	28,600	15.5	12.5	1,350	5328533
	CSCF4860N6D*+TXV	A*VC80805C*B*	38,500	28,600	15.5	12.5	1,250	5328382
	CSCF4860N6D*+TXV	A*VM960805CXB*	38,500	28,600	15.5	12.5	1,300	5622448
	CSCF4860N6D*+TXV	A*VM961005DXB*	38,500	28,600	15.0	12.5	1,300	5622482
	CSCF4860N6D*+TXV	G*VC950905CXB*	39,500	29,400	15.0	13.0	1,450	5622353
CSCF4860N6D*+TXV	G*VC950905DXB*	39,500	29,400	15.5	13.0	1,450	5622379	
CSCF4860N6D*+TXV	G*VC951155DXB*	39,500	29,400	15.5	13.0	1,425	5622411	
CSCF4860N6D*+TXV	G*VM960805CXB*	38,500	28,600	15.5	12.5	1,300	5622449	
CSCF4860N6D*+TXV	GME950805CXA*	38,500	28,600	15.0	12.5	1,350	5328524	
CSCF4860N6D*+TXV	A*VC950704CXB*	39,000	29,000	15.0	12.5	1,400	5622336	
CSCF4860N6D*+TXV	G*VC950704CXB*	38,500	28,600	15.0	12.5	1,300	5622337	
CSCF4860N6D*+TXV	A*VC951155DXB*	39,000	29,000	15.5	13.0	1,425	5622410	
CSCF4860N6D*+TXV	G*VM961155DXB*	38,500	28,600	15.5	12.5	1,300	5622509	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0481B*	ASPF426016E*+TXV		45,500	34,600	15.5	12.5	1,540	4559597
	AVPTC426014A*		45,500	34,600	16.0	13.0	1,575	4431277
	CA*F4860*6D*	G*E80805C*B*	45,000	34,200	15.0	12.5	1,400	5368288
	CA*F4860*6D*	A*VC80604B*B*	45,000	34,200	14.5	12.0	1,400	5368298
	CA*F4860*6D*	A*VC80805C*B*	45,000	34,200	15.0	12.5	1,400	5368306
	CA*F4860*6D*	GME951005DXA*	45,000	34,200	14.5	12.5	1,450	5368426
	CA*F4860*6D*	ADVC81005C*B*	44,500	34,000	15.0	12.5	1,400	5368416
	CA*F4860*6D*	G*E81005C*B*	45,000	34,200	15.0	12.5	1,400	5368293
	CA*F4860*6D*	A*VC950905DXB*	45,000	34,200	14.5	12.0	1,450	5622548
	CA*F4860*6D*	G*VC950905DXB*	45,000	34,200	14.5	12.0	1,450	5622549
	CA*F4860*6D*	A*VM961005DXB*	45,000	34,200	15.0	12.5	1,400	5622632
	CA*F4860*6D*	G*VM961005DXB*	45,000	34,200	15.0	12.5	1,400	5622633
	CA*F4860*6D*	A*VM961155DXB*	45,000	34,200	15.0	12.5	1,400	5622650
	CA*F4860*6D*	G*VM961155DXB*	45,000	34,200	15.0	12.5	1,400	5622651
	CA*F4860*6D*	G*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622511
	CA*F4860*6D*	G*VC950905CXB*	45,000	34,200	14.0	12.0	1,450	5622531
	CA*F4860*6D*	A*VC951155DXB*	45,000	34,200	15.0	12.5	1,400	5622572
	CA*F4860*6D*	G*VC951155DXB*	45,000	34,200	15.0	12.5	1,400	5622573
	CA*F4860*6D*	A*VC81005C*B*	45,000	34,200	15.0	12.5	1,400	5368316
	CA*F4860*6D*	G*VC81005C*B*	45,000	34,200	15.0	12.5	1,400	5368317
	CA*F4860*6D*	ADVC80805C*B*	44,500	34,000	15.0	12.5	1,400	5368411
	CA*F4860*6D*	A*VC950905CXB*	45,000	34,200	14.0	12.0	1,450	5622530
	CA*F4860*6D*	A*VM960805CXB*	45,000	34,200	14.0	12.0	1,450	5622608
	CA*F4860*6D*	G*VM960805CXB*	45,000	34,200	14.0	12.0	1,450	5622609
	CA*F4860*6D*	A*VM960604CXB*	45,000	34,200	14.5	12.0	1,400	5622590
	CA*F4860*6D*	G*VM960604CXB*	45,000	34,200	14.5	12.0	1,400	5622591
	CA*F4860*6D*	G*VC80604B*B*	45,000	34,200	14.5	12.0	1,400	5368299
	CA*F4860*6D*	G*VC80805C*B*	45,000	34,200	15.0	12.5	1,400	5368307
	CA*F4860*6D*	GME950805CXA*	44,500	34,000	15.0	12.5	1,400	5368421
	CA*F4860*6D*	A*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622510
	CA*F4860*6D*+EEP		45,000	34,200	14.0	12.0	1,400	5368279
	CA*F4860*6D*+EEP+TXV		45,000	34,200	14.0	12.0	1,575	4300928
	CA*F4860*6D*+MBVC2000**-1A*		45,000	34,200	15.5	12.5	1,450	5368280
	CA*F4860*6D*+MBVC2000**-1A*+TXV		45,000	34,200	16.0	13.0	1,620	4300930
	CA*F4860*6D*+TXV	G*VC91155DXA*	46,000	35,000	16.0	13.0	1,370	4300942
	CA*F4860*6D*+TXV	A*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5038901
	CA*F4860*6D*+TXV	G*E80805C*B*	45,000	34,200	15.0	12.3	1,480	5039003
	CA*F4860*6D*+TXV	ADVC80805C*B*	44,500	34,000	15.0	12.3	1,380	5038910
	CA*F4860*6D*+TXV	G*VC81005C*B*	45,000	34,200	15.0	12.0	1,530	5039004
	CA*F4860*6D*+TXV	A*VC81005C*B*	45,000	34,200	15.0	12.0	1,530	5039195
	CA*F4860*6D*+TXV	G*VC80604B*B*	45,000	34,200	14.5	12.0	1,550	5368301
	CA*F4860*6D*+TXV	GME950805CXA*	44,500	34,000	16.0	13.0	1,220	4701090
	CA*F4860*6D*+TXV	A*VC950915DXB*	46,000	35,000	16.0	13.0	1,330	5622566
	CA*F4860*6D*+TXV	G*VC950915DXB*	46,000	35,000	16.0	13.0	1,330	5622567
	CA*F4860*6D*+TXV	G*VC950714CXB*	45,500	34,600	15.5	12.5	1,320	5622529
	CA*F4860*6D*+TXV	G*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622533
	CA*F4860*6D*+TXV	G*VC950905DXB*	45,000	34,200	16.0	13.0	1,300	5622551
CA*F4860*6D*+TXV	G*VC951155DXB*	45,000	34,200	16.0	13.0	1,270	5622575	
CA*F4860*6D*+TXV	A*VM960604CXB*	45,000	34,200	15.5	12.5	1,320	5622592	
CA*F4860*6D*+TXV	G*VM960604CXB*	45,000	34,200	15.5	12.5	1,320	5622593	
CA*F4860*6D*+TXV	A*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622610	
CA*F4860*6D*+TXV	A*VM960805DXB*	46,000	35,000	16.0	13.0	1,330	5622626	
CA*F4860*6D*+TXV	A*VM961005DXB*	45,000	34,200	16.0	13.0	1,270	5622634	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0481B* (cont.)	CA*F4860*6D*+TXV	A*VC950905DXB*	45,000	34,200	16.0	13.0	1,300	5622550
	CA*F4860*6D*+TXV	G*VM960805DXB*	46,000	35,000	16.0	13.0	1,330	5622627
	CA*F4860*6D*+TXV	G*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5038900
	CA*F4860*6D*+TXV	G*E81005C*B*	45,000	34,200	15.0	12.3	1,570	5039143
	CA*F4860*6D*+TXV	ADVC81005C*B*	44,500	34,000	15.0	12.0	1,410	5039063
	CA*F4860*6D*+TXV	G*VC950704CXB*	45,000	34,200	15.5	12.5	1,290	5622513
	CA*F4860*6D*+TXV	A*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622532
	CA*F4860*6D*+TXV	A*VM961155DXB*	45,000	34,200	16.0	13.0	1,270	5622652
	CA*F4860*6D*+TXV	A*VC950704CXB*	45,000	34,200	14.5	12.0	1,550	5622512
	CA*F4860*6D*+TXV	A*VC950714CXB*	45,500	34,600	15.5	12.5	1,320	5622528
	CA*F4860*6D*+TXV	A*VC951155DXB*	45,000	34,200	16.0	13.0	1,270	5622574
	CA*F4860*6D*+TXV	G*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622611
	CA*F4860*6D*+TXV	G*VM961155DXB*	45,000	34,200	16.0	13.0	1,270	5622653
	CA*F4860*6D*+TXV	GME951005DXA*	45,000	34,200	16.0	13.0	1,270	4701093
	CA*F4860*6D*+TXV	A*VC80604B*B*	45,000	34,200	14.5	12.0	1,550	5368300
	CA*F4860*6D*+TXV	G*VM961005DXB*	45,000	34,200	16.0	13.0	1,270	5622635
	CA*F4961*6D*	G*E81005C*B*	45,000	34,200	15.5	12.5	1,400	5368294
	CA*F4961*6D*	A*VC81005C*B*	45,000	34,200	15.5	12.5	1,400	5368318
	CA*F4961*6D*	A*VC80805C*B*	45,000	34,200	15.5	12.5	1,400	5368308
	CA*F4961*6D*	ADVC81005C*B*	44,500	34,000	15.0	12.5	1,400	5368417
	CA*F4961*6D*	GME950805CXA*	44,500	34,000	15.0	12.5	1,400	5368422
	CA*F4961*6D*	G*E80805C*B*	45,000	34,200	15.5	12.5	1,400	5368289
	CA*F4961*6D*	G*VC81005C*B*	45,000	34,200	15.5	12.5	1,400	5368319
	CA*F4961*6D*	G*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622515
	CA*F4961*6D*	A*VC951155DXB*	45,000	34,200	15.5	12.5	1,400	5622576
	CA*F4961*6D*	G*VC951155DXB*	45,000	34,200	15.5	12.5	1,400	5622577
	CA*F4961*6D*	A*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622514
	CA*F4961*6D*	G*VM961155DXB*	45,000	34,200	15.5	12.5	1,400	5622655
	CA*F4961*6D*	A*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5368302
	CA*F4961*6D*	G*VC80805C*B*	45,000	34,200	15.5	12.5	1,400	5368309
	CA*F4961*6D*	GME951005DXA*	45,000	34,200	15.0	12.5	1,450	5368427
	CA*F4961*6D*	G*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5368303
	CA*F4961*6D*	G*VC950905DXB*	45,000	34,200	15.0	12.5	1,450	5622553
	CA*F4961*6D*	A*VM960604CXB*	45,000	34,200	15.0	12.5	1,400	5622594
	CA*F4961*6D*	G*VM960604CXB*	45,000	34,200	15.0	12.5	1,400	5622595
	CA*F4961*6D*	A*VM960805CXB*	45,000	34,200	14.5	12.0	1,450	5622612
	CA*F4961*6D*	G*VM960805CXB*	45,000	34,200	14.5	12.0	1,450	5622613
	CA*F4961*6D*	G*VM961005DXB*	45,000	34,200	15.5	12.5	1,400	5622637
	CA*F4961*6D*	A*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622534
	CA*F4961*6D*	A*VC950905DXB*	45,000	34,200	15.0	12.5	1,450	5622552
	CA*F4961*6D*	ADVC80805C*B*	44,500	34,000	15.0	12.5	1,400	5368412
	CA*F4961*6D*	G*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622535
	CA*F4961*6D*	A*VM961005DXB*	45,000	34,200	15.5	12.5	1,400	5622636
	CA*F4961*6D*	A*VM961155DXB*	45,000	34,200	15.5	12.5	1,400	5622654
	CA*F4961*6D*+EEP		45,000	34,200	14.5	12.0	1,400	5368281
	CA*F4961*6D*+EEP+TXV		45,000	34,200	14.5	11.5	1,550	4431658
	CA*F4961*6D*+MBVC2000**-1A*		45,000	34,200	16.0	13.0	1,450	5368282
	CA*F4961*6D*+MBVC2000**-1A*+TXV		45,000	34,200	15.5	12.5	1,620	4431679
CA*F4961*6D*+TXV	ADVC80805C*B*	44,500	34,000	15.0	12.3	1,380	5038890	
CA*F4961*6D*+TXV	A*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5039196	
CA*F4961*6D*+TXV	A*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5368304	
CA*F4961*6D*+TXV	GME950805CXA*	44,500	34,000	16.0	13.0	1,220	4701095	
CA*F4961*6D*+TXV	G*VC950905DXB*	45,000	34,200	16.0	13.0	1,420	5622555	

See Notes on Page 53.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0481B* (cont.)	CA*F4961*6D*+TXV	A*VM960604CXB*	45,000	34,200	15.5	12.5	1,400	5622596
	CA*F4961*6D*+TXV	G*VM960604CXB*	45,000	34,200	15.5	12.5	1,400	5622597
	CA*F4961*6D*+TXV	G*VM961155DXB*	45,000	34,200	15.5	13.0	1,400	5622657
	CA*F4961*6D*+TXV	G*E80805C*B*	45,000	34,200	15.0	12.3	1,480	5039186
	CA*F4961*6D*+TXV	G*VC81005C*B*	45,000	34,200	15.5	12.0	1,530	5039212
	CA*F4961*6D*+TXV	G*VC951155DXB*	45,000	34,200	15.5	13.0	1,400	5622579
	CA*F4961*6D*+TXV	G*E81005C*B*	45,000	34,200	15.0	12.3	1,570	5038920
	CA*F4961*6D*+TXV	ADVC81005C*B*	44,500	34,000	15.0	12.0	1,410	5039213
	CA*F4961*6D*+TXV	A*VC81005C*B*	45,000	34,200	15.5	12.0	1,530	5039214
	CA*F4961*6D*+TXV	GME951005DXA*	45,000	34,200	15.0	12.5	1,650	4703720
	CA*F4961*6D*+TXV	G*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5368305
	CA*F4961*6D*+TXV	G*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5039211
	CA*F4961*6D*+TXV	G*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622537
	CA*F4961*6D*+TXV	G*VC950704CXB*	45,000	34,200	15.5	12.5	1,290	5622517
	CA*F4961*6D*+TXV	A*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622536
	CA*F4961*6D*+TXV	A*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622614
	CA*F4961*6D*+TXV	A*VC951155DXB*	45,000	34,200	15.5	12.5	1,400	5622578
	CA*F4961*6D*+TXV	A*VC950915DXB*	46,000	35,000	16.0	13.0	1,330	5622568
	CA*F4961*6D*+TXV	G*VC950915DXB*	46,000	35,000	16.0	13.0	1,330	5622569
	CA*F4961*6D*+TXV	G*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622615
	CA*F4961*6D*+TXV	A*VM961005DXB*	45,000	34,200	15.5	12.5	1,400	5622638
	CA*F4961*6D*+TXV	G*VM961005DXB*	45,000	34,200	15.5	13.0	1,400	5622639
	CA*F4961*6D*+TXV	A*VC950704CXB*	45,000	34,200	15.0	12.5	1,400	5622516
	CA*F4961*6D*+TXV	A*VC950905DXB*	45,000	34,200	15.5	12.5	1,450	5622554
	CA*F4961*6D*+TXV	G*VM960805DXB*	46,000	35,000	16.0	13.0	1,330	5622628
	CA*F4961*6D*+TXV	A*VM961155DXB*	45,000	34,200	15.5	12.5	1,400	5622656
	CAPT4961*4A*	A*VC80805C*B*	45,000	34,200	15.0	12.3	1,390	5520681
	CAPT4961*4A*	G*VC80805C*B*	45,000	34,200	15.0	12.3	1,390	5520697
	CAPT4961*4A*	A*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5520680
	CAPT4961*4A*	ADVC80805C*B*	44,500	34,000	15.0	12.3	1,390	5520692
	CAPT4961*4A*	G*E81005C*B*	45,000	34,200	15.0	12.3	1,400	5520695
	CAPT4961*4A*	G*VC950905CXB*	45,000	34,200	15.5	12.5	1,450	5622539
	CAPT4961*4A*	A*VM960805CXB*	45,000	34,200	15.5	12.5	1,450	5622616
	CAPT4961*4A*	G*VM960805DXB*	46,000	35,000	15.5	12.5	1,450	5622629
	CAPT4961*4A*	A*VM961005DXB*	45,000	34,200	15.5	12.5	1,400	5622640
	CAPT4961*4A*	A*VM961155DXB*	45,000	34,200	15.5	12.5	1,400	5622658
	CAPT4961*4A*	GME951005DXA*	45,000	34,200	15.0	12.5	1,400	5520710
	CAPT4961*4A*	ADVC81005C*B*	44,500	34,000	15.0	12.0	1,400	5520693
	CAPT4961*4A*	G*E80805C*B*	45,000	34,200	15.0	12.3	1,400	5520694
	CAPT4961*4A*	G*VC80604B*B*	45,000	34,200	15.0	12.5	1,400	5520696
	CAPT4961*4A*	GME950805CXA*	44,500	34,000	16.0	13.0	1,400	5520709
	CAPT4961*4A*	G*VC81005C*B*	45,000	34,200	15.5	12.0	1,400	5520698
	CAPT4961*4A*	A*VC950704CXB*	45,000	34,200	15.0	12.5	1,390	5622518
	CAPT4961*4A*	G*VC950905DXB*	45,000	34,200	15.5	12.5	1,450	5622557
	CAPT4961*4A*	A*VC951155DXB*	45,000	34,200	15.5	12.5	1,400	5622580
	CAPT4961*4A*	G*VM960805CXB*	45,000	34,200	15.5	12.5	1,450	5622617
	CAPT4961*4A*	G*VM961155DXB*	45,000	34,200	15.5	13.0	1,400	5622659
	CAPT4961*4A*	A*VC950905CXB*	45,000	34,200	15.5	12.5	1,450	5622538
CAPT4961*4A*	A*VC950905DXB*	45,000	34,200	15.5	12.5	1,450	5622556	
CAPT4961*4A*	G*VC950915DXB*	46,000	35,000	16.0	13.0	1,410	5622571	
CAPT4961*4A*	G*VC951155DXB*	45,000	34,200	15.5	13.0	1,400	5622581	
CAPT4961*4A*	A*VC950915DXB*	46,000	35,000	16.0	13.0	1,410	5622570	
CAPT4961*4A*	A*VM960604CXB*	45,000	34,200	15.5	12.5	1,400	5622598	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0481B* (cont.)	CAPT4961*4A*	G*VM960604CXB*	45,000	34,200	15.5	12.5	1,400	5622599
	CAPT4961*4A*	G*VM961005DXB*	45,000	34,200	15.5	13.0	1,400	5622641
	CAPT4961*4A*	A*VC81005C*B*	45,000	34,200	15.5	12.0	1,400	5520682
	CAPT4961*4A*	G*VC950704CXB*	45,000	34,200	15.5	12.5	1,390	5622519
	CAPT4961*4A*+EEP		45,000	34,200	14.5	11.5	1,400	5520711
	CAPT4961*4A*+MBVC1600**-1A*		45,000	34,200	15.0	12.5	1,400	5611386
	CAPT4961*4A*+MBVC2000**-1A*		45,000	34,200	15.5	12.5	1,450	5527437
	CHPF4860D6D*	G*E81005C*B*	45,000	34,200	15.0	12.5	1,400	5368295
	CHPF4860D6D*	A*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622540
	CHPF4860D6D*	G*VM961155DXB*	45,000	34,200	15.0	12.5	1,400	5622661
	CHPF4860D6D*	G*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622541
	CHPF4860D6D*	G*VC950905DXB*	45,000	34,200	15.0	12.5	1,450	5622559
	CHPF4860D6D*	A*VC951155DXB*	45,000	34,200	15.0	12.5	1,400	5622582
	CHPF4860D6D*	G*VC951155DXB*	45,000	34,200	15.0	12.5	1,400	5622583
	CHPF4860D6D*	A*VM960604CXB*	45,000	34,200	15.0	12.5	1,400	5622600
	CHPF4860D6D*	G*VM960604CXB*	45,000	34,200	15.0	12.5	1,400	5622601
	CHPF4860D6D*	G*VC81005C*B*	45,000	34,200	15.0	12.5	1,400	5368321
	CHPF4860D6D*	A*VC81005C*B*	45,000	34,200	15.0	12.5	1,400	5368320
	CHPF4860D6D*	GME950805CXA*	44,500	34,000	15.0	12.5	1,400	5368423
	CHPF4860D6D*	G*E80805C*B*	45,000	34,200	15.0	12.5	1,400	5368290
	CHPF4860D6D*	A*VC80805C*B*	45,000	34,200	15.0	12.5	1,400	5368310
	CHPF4860D6D*	G*VC80805C*B*	45,000	34,200	15.0	12.5	1,400	5368311
	CHPF4860D6D*	G*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622521
	CHPF4860D6D*	A*VC950704CXB*	45,000	34,200	14.5	12.0	1,400	5622520
	CHPF4860D6D*	A*VC950905DXB*	45,000	34,200	15.0	12.5	1,450	5622558
	CHPF4860D6D*	A*VM960805CXB*	45,000	34,200	14.5	12.0	1,450	5622618
	CHPF4860D6D*	G*VM961005DXB*	45,000	34,200	15.0	12.5	1,400	5622643
	CHPF4860D6D*	A*VM961005DXB*	45,000	34,200	15.0	12.5	1,400	5622642
	CHPF4860D6D*	A*VM961155DXB*	45,000	34,200	15.0	12.5	1,400	5622660
	CHPF4860D6D*	GME951005DXA*	45,000	34,200	14.5	12.0	1,450	5368428
	CHPF4860D6D*	G*VM960805CXB*	45,000	34,200	14.5	12.0	1,450	5622619
	CHPF4860D6D*+EEP		45,000	34,200	14.0	12.0	1,400	5368283
	CHPF4860D6D*+EEP+TXV		45,000	34,200	14.0	12.0	1,500	4300960
	CHPF4860D6D*+MBVC2000**-1A*		45,000	34,200	15.5	12.5	1,450	5368284
	CHPF4860D6D*+MBVC2000**-1A*+TXV		45,000	34,200	16.0	13.2	1,620	4300962
	CHPF4860D6D*+TXV	G*E81005C*B*	45,000	34,200	15.0	12.3	1,570	5038973
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5039073
	CHPF4860D6D*+TXV	GME950805CXA*	44,500	34,000	16.0	13.0	1,220	4701124
	CHPF4860D6D*+TXV	GME951005DXA*	45,000	34,200	15.5	12.5	1,650	4703721
	CHPF4860D6D*+TXV	G*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622543
	CHPF4860D6D*+TXV	G*VC950905DXB*	45,000	34,200	16.0	13.0	1,420	5622561
	CHPF4860D6D*+TXV	A*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622620
	CHPF4860D6D*+TXV	G*VM961155DXB*	45,000	34,200	16.0	13.0	1,400	5622663
	CHPF4860D6D*+TXV	G*VM961005DXB*	45,000	34,200	16.0	13.0	1,400	5622645
	CHPF4860D6D*+TXV	G*E80805C*B*	45,000	34,200	15.0	12.3	1,480	5038921
	CHPF4860D6D*+TXV	A*VM961155DXB*	45,000	34,200	16.0	13.0	1,400	5622662
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,000	34,200	15.5	12.0	1,530	5038922
CHPF4860D6D*+TXV	G*VC81005C*B*	45,000	34,200	15.5	12.0	1,530	5039187	
CHPF4860D6D*+TXV	A*VC950704CXB*	45,000	34,200	15.5	12.5	1,290	5622522	
CHPF4860D6D*+TXV	G*VM960805CXB*	45,000	34,200	16.0	13.0	1,220	5622621	
CHPF4860D6D*+TXV	A*VM961005DXB*	45,000	34,200	16.0	13.0	1,400	5622644	
CHPF4860D6D*+TXV	G*VC950704CXB*	45,000	34,200	15.5	12.5	1,290	5622523	
CHPF4860D6D*+TXV	A*VC950905CXB*	45,000	34,200	16.0	13.0	1,220	5622542	
CHPF4860D6D*+TXV	A*VC951155DXB*	45,000	34,200	16.0	13.0	1,400	5622584	
CHPF4860D6D*+TXV	A*VM960604CXB*	45,000	34,200	15.5	12.5	1,320	5622602	
CHPF4860D6D*+TXV	G*VM960604CXB*	45,000	34,200	15.5	12.5	1,320	5622603	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0481B* (cont.)	CHPF4860D6D*+TXV	G*VM960805DXB*	46,000	35,000	16.0	13.0	1,330	5622631
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,000	34,200	15.0	12.3	1,510	5039271
	CHPF4860D6D*+TXV	A*VC950905DXB*	45,000	34,200	16.0	13.0	1,420	5622560
	CHPF4860D6D*+TXV	G*VC951155DXB*	45,000	34,200	16.0	13.0	1,400	5622585
	CHPF4860D6D*+TXV	A*VM960805DXB*	46,000	35,000	16.0	13.0	1,330	5622630
	CSCF4860N6D*	G*E81005C*B*	44,500	34,000	15.0	12.5	1,400	5368296
	CSCF4860N6D*	A*VC80805C*B*	44,500	34,000	15.0	12.5	1,400	5368312
	CSCF4860N6D*	G*VC950704CXB*	44,500	34,000	14.5	12.0	1,400	5622525
	CSCF4860N6D*	A*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622544
	CSCF4860N6D*	G*VC950905DXB*	44,500	34,000	15.0	12.5	1,450	5622563
	CSCF4860N6D*	A*VM961155DXB*	44,500	34,000	15.0	12.5	1,400	5622664
	CSCF4860N6D*	A*VC950905DXB*	44,500	34,000	15.0	12.5	1,450	5622562
	CSCF4860N6D*	A*VM961005DXB*	44,500	34,000	15.0	12.5	1,400	5622646
	CSCF4860N6D*	G*VM961005DXB*	44,500	34,000	15.0	12.5	1,400	5622647
	CSCF4860N6D*	G*E80805C*B*	45,000	34,200	15.0	12.5	1,400	5368291
	CSCF4860N6D*	G*VC80805C*B*	44,500	34,000	15.0	12.5	1,400	5368313
	CSCF4860N6D*	A*VC81005C*B*	44,500	34,000	15.0	12.5	1,400	5368322
	CSCF4860N6D*	GME951005DXA*	44,500	34,000	14.5	12.0	1,450	5368429
	CSCF4860N6D*	G*VC81005C*B*	44,500	34,000	15.0	12.5	1,400	5368323
	CSCF4860N6D*	A*VC950704CXB*	44,500	34,000	14.5	12.0	1,400	5622524
	CSCF4860N6D*	A*VM960604CXB*	44,500	34,000	14.5	12.0	1,400	5622604
	CSCF4860N6D*	G*VM960604CXB*	44,500	34,000	14.5	12.0	1,400	5622605
	CSCF4860N6D*	A*VM960805CXB*	44,500	34,000	14.5	12.0	1,475	5622622
	CSCF4860N6D*	G*VC951155DXB*	44,500	34,000	15.0	12.5	1,400	5622587
	CSCF4860N6D*	G*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622545
	CSCF4860N6D*	G*VM960805CXB*	44,500	34,000	14.5	12.0	1,475	5622623
	CSCF4860N6D*	GME950805CXA*	44,000	33,600	15.0	12.5	1,400	5368424
	CSCF4860N6D*	A*VC951155DXB*	44,500	34,000	15.0	12.5	1,400	5622586
	CSCF4860N6D*	G*VM961155DXB*	44,500	34,000	15.0	12.5	1,400	5622665
	CSCF4860N6D*+EEP		44,500	34,000	14.0	12.0	1,400	5368285
	CSCF4860N6D*+EEP+TXV		44,500	34,000	14.5	11.5	1,600	4767537
	CSCF4860N6D*+MBVC2000**-1A*		44,500	34,000	15.5	12.5	1,450	5368286
	CSCF4860N6D*+MBVC2000**-1A*+TXV		44,500	34,000	15.5	12.5	1,450	5368287
	CSCF4860N6D*+TXV	A*VC81005C*B*	44,500	34,000	15.5	12.5	1,400	5368324
	CSCF4860N6D*+TXV	GME951005DXA*	44,500	34,000	15.0	12.5	1,450	5368430
	CSCF4860N6D*+TXV	G*VC81005C*B*	44,500	34,000	15.5	12.5	1,400	5368325
	CSCF4860N6D*+TXV	A*VC950704CXB*	44,500	34,000	15.0	12.5	1,450	5622526
	CSCF4860N6D*+TXV	A*VC950905CXB*	45,000	34,200	14.5	12.0	1,450	5622546
	CSCF4860N6D*+TXV	G*VC950905CXB*	45,000	34,200	16.0	13.0	1,400	5622547
	CSCF4860N6D*+TXV	A*VC950905DXB*	44,500	34,000	15.0	12.5	1,450	5622564
	CSCF4860N6D*+TXV	G*VC951155DXB*	44,500	34,000	16.0	13.0	1,400	5622589
	CSCF4860N6D*+TXV	A*VM960604CXB*	44,500	34,000	15.0	12.5	1,400	5622606
	CSCF4860N6D*+TXV	G*VC950704CXB*	44,500	34,000	15.0	12.5	1,450	5622527
	CSCF4860N6D*+TXV	A*VC951155DXB*	44,500	34,000	15.5	12.5	1,400	5622588
	CSCF4860N6D*+TXV	G*VM960604CXB*	44,500	34,000	15.0	12.5	1,400	5622607
	CSCF4860N6D*+TXV	G*E80805C*B*	45,000	34,200	15.5	12.5	1,400	5368292
	CSCF4860N6D*+TXV	G*E81005C*B*	44,500	34,000	15.5	12.5	1,400	5368297
	CSCF4860N6D*+TXV	G*VC80805C*B*	44,500	34,000	15.5	12.5	1,425	5368315
	CSCF4860N6D*+TXV	GME950805CXA*	44,000	33,600	15.0	12.5	1,400	5368425
	CSCF4860N6D*+TXV	A*VC80805C*B*	44,500	34,000	15.5	12.5	1,425	5368314
CSCF4860N6D*+TXV	G*VC950905DXB*	44,500	34,000	16.0	13.0	1,400	5622565	
CSCF4860N6D*+TXV	A*VM961005DXB*	44,500	34,000	15.5	12.5	1,400	5622648	
CSCF4860N6D*+TXV	A*VM961155DXB*	44,500	34,000	15.5	12.5	1,400	5622666	
CSCF4860N6D*+TXV	G*VM961005DXB*	44,500	34,000	15.5	12.5	1,400	5622649	
CSCF4860N6D*+TXV	G*VM960805CXB*	44,500	34,000	14.5	12.0	1,475	5622625	
CSCF4860N6D*+TXV	A*VM960805CXB*	44,500	34,000	14.5	12.0	1,475	5622624	
CSCF4860N6D*+TXV	G*VM961155DXB*	44,500	34,000	15.5	12.5	1,400	5622667	

See Notes on Page 53.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
SSX16 0591A*	AVPTC426014A*		56,500	39,000	15.5	12.7	1,800	4431281
	CA*F4860*6D*+MBVC2000**-1A*+TXV		55,500	38,000	15.5	12.7	1,550	3880346
	CA*F4860*6D*+TXV	GME951005DXA*	54,500	37,400	14.5	12.2	1,575	4703724
	CA*F4860*6D*+TXV	GME950805CXA*	55,500	38,000	14.5	12.2	1,575	4701091
	CA*F4860*6D*+TXV	G*E81005C*B*	54,500	37,400	14.5	12.0	1,500	5379178
	CA*F4860*6D*+TXV	A*VM960805CXB*	55,500	38,000	14.5	12.2	1,575	5622698
	CA*F4860*6D*+TXV	A*VC950905DXB*	55,500	38,000	15.0	12.5	1,575	5622676
	CA*F4860*6D*+TXV	G*VM960805DXB*	55,500	38,000	15.0	12.5	1,575	5622707
	CA*F4860*6D*+TXV	A*VM961155DXB*	55,000	37,800	14.5	12.2	1,575	5622722
	CA*F4860*6D*+TXV	G*VM961155DXB*	55,000	37,800	14.5	12.2	1,575	5622723
	CA*F4860*6D*+TXV	G*VC950905DXB*	55,500	38,000	15.0	12.5	1,575	5622677
	CA*F4860*6D*+TXV	G*VM960805CXB*	55,500	38,000	14.5	12.2	1,575	5622699
	CA*F4860*6D*+TXV	G*VM961005DXB*	55,000	37,800	14.5	12.2	1,575	5622715
	CA*F4860*6D*+TXV	G*VC951155DXB*	55,000	37,800	14.5	12.2	1,575	5622691
	CA*F4860*6D*+TXV	A*VM960805DXB*	55,500	38,000	15.0	12.5	1,575	5622706
	CA*F4860*6D*+TXV	A*VC951155DXB*	55,000	37,800	14.5	12.2	1,575	5622690
	CA*F4860*6D*+TXV	G*VC950915DXB*	55,500	38,000	15.0	12.5	1,575	5622685
	CA*F4860*6D*+TXV	A*VC950905CXB*	55,500	38,000	14.5	12.2	1,575	5622668
	CA*F4860*6D*+TXV	A*VM961005DXB*	55,000	37,800	14.5	12.2	1,575	5622714
	CA*F4860*6D*+TXV	G*E80805C*B*	54,500	37,400	14.5	12.0	1,500	5379181
	CA*F4860*6D*+TXV	G*VC950905CXB*	55,500	38,000	14.5	12.2	1,575	5622669
	CA*F4860*6D*+TXV	A*VC950915DXB*	55,500	38,000	15.0	12.5	1,575	5622684
	CA*F4961*6D*+EEP+TXV		56,500	39,000	14.5	12.2	1,500	4906888
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	39,000	16.0	13.0	1,500	4431680
	CA*F4961*6D*+TXV	GME950805CXA*	56,000	38,500	15.5	12.7	1,550	4701096
	CA*F4961*6D*+TXV	A*VC80805C*B*	56,000	38,500	15.5	12.5	1,510	5039080
	CA*F4961*6D*+TXV	ADV80805C*B*	56,000	38,500	15.5	12.5	1,580	5038905
	CA*F4961*6D*+TXV	G*VC81005C*B*	56,000	38,500	15.5	12.5	1,600	5039200
	CA*F4961*6D*+TXV	G*E80805C*B*	56,000	38,500	15.0	12.5	1,500	5379180
	CA*F4961*6D*+TXV	GME951005DXA*	56,000	38,500	15.5	12.7	1,500	4701097
	CA*F4961*6D*+TXV	A*VC950915DXB*	56,000	38,500	15.5	12.7	1,550	5622686
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,000	38,500	15.5	12.7	1,550	5622687
	CA*F4961*6D*+TXV	A*VM961155DXB*	56,000	38,500	15.5	12.7	1,500	5622724
	CA*F4961*6D*+TXV	A*VC950905CXB*	56,000	38,500	15.5	12.7	1,550	5622670
	CA*F4961*6D*+TXV	G*VC950905DXB*	56,000	38,500	15.5	12.7	1,550	5622679
	CA*F4961*6D*+TXV	A*VM960805DXB*	56,000	38,500	15.5	12.7	1,550	5622708
	CA*F4961*6D*+TXV	A*VC81005C*B*	56,000	38,500	15.5	12.5	1,600	5039087
	CA*F4961*6D*+TXV	ADV81005C*B*	56,000	38,500	15.5	12.5	1,550	5039088
	CA*F4961*6D*+TXV	G*E81005C*B*	56,000	38,500	15.0	12.5	1,500	5379177
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,000	38,500	15.5	12.5	1,510	5039089
	CA*F4961*6D*+TXV	G*VC950905CXB*	56,000	38,500	15.5	12.7	1,550	5622671
	CA*F4961*6D*+TXV	G*VC951155DXB*	56,000	38,500	15.5	12.7	1,500	5622693
	CA*F4961*6D*+TXV	A*VM960805CXB*	56,000	38,500	15.5	12.7	1,550	5622700
	CA*F4961*6D*+TXV	A*VM961005DXB*	56,000	38,500	15.5	12.7	1,500	5622716
	CA*F4961*6D*+TXV	G*VM960805CXB*	56,000	38,500	15.5	12.7	1,550	5622701
	CA*F4961*6D*+TXV	G*VM960805DXB*	56,000	38,500	15.5	12.7	1,550	5622709
	CA*F4961*6D*+TXV	A*VC950905DXB*	56,000	38,500	15.5	12.7	1,550	5622678
	CA*F4961*6D*+TXV	A*VC951155DXB*	56,000	38,500	15.5	12.7	1,500	5622692
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,000	38,500	15.5	12.7	1,500	5622725
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,000	38,500	15.5	12.7	1,500	5622717
	CAPT4961*4A*	GME951005DXA*	56,000	38,500	15.0	12.5	1,500	5520773
	CAPT4961*4A*	A*VM961005DXB*	56,000	38,500	15.0	12.5	1,540	5622718
CAPT4961*4A*	A*VC950905DXB*	56,000	38,500	15.0	12.5	1,460	5622680	
CAPT4961*4A*	G*VC950905DXB*	56,000	38,500	15.0	12.5	1,460	5622681	
CAPT4961*4A*	A*VM960805CXB*	56,000	38,500	15.0	12.5	1,570	5622702	

See Notes on Page 53.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
SSX16 0591A* (cont.)	CAPT4961*4A*	G*VM960805DXB*	56,000	38,500	15.0	12.5	1,570	5622711	
	CAPT4961*4A*	G*E81005C*B*	56,000	38,500	15.0	12.5	1,505	5520761	
	CAPT4961*4A*	ADVC81005C*B*	56,000	38,500	15.5	12.5	1,550	5520759	
	CAPT4961*4A*	G*VC81005C*B*	56,000	38,500	15.0	12.5	1,520	5520763	
	CAPT4961*4A*	GME950805CXA*	56,000	38,500	15.0	12.5	1,510	5520772	
	CAPT4961*4A*	ADVC80805C*B*	56,000	38,500	15.5	12.5	1,530	5520758	
	CAPT4961*4A*	A*VM960805DXB*	56,000	38,500	15.0	12.5	1,570	5622710	
	CAPT4961*4A*	G*VC950905CXB*	56,000	38,500	15.0	12.5	1,455	5622673	
	CAPT4961*4A*	G*VC951155DXB*	56,000	38,500	15.0	12.5	1,540	5622695	
	CAPT4961*4A*	G*VC950915DXB*	56,000	38,500	15.0	12.5	1,570	5622689	
	CAPT4961*4A*	G*VM961005DXB*	56,000	38,500	15.0	12.5	1,540	5622719	
	CAPT4961*4A*	A*VM961155DXB*	56,000	38,500	15.0	12.5	1,540	5622726	
	CAPT4961*4A*	G*VM960805CXB*	56,000	38,500	15.0	12.5	1,570	5622703	
	CAPT4961*4A*	G*VM961155DXB*	56,000	38,500	15.0	12.5	1,540	5622727	
	CAPT4961*4A*	G*E80805C*B*	56,000	38,500	15.0	12.5	1,530	5520760	
	CAPT4961*4A*	G*VC80805C*B*	56,000	38,500	15.0	12.5	150	5520762	
	CAPT4961*4A*	A*VC950905CXB*	56,000	38,500	15.0	12.5	1,455	5622672	
	CAPT4961*4A*	A*VC950915DXB*	56,000	38,500	15.0	12.5	1,570	5622688	
	CAPT4961*4A*	A*VC951155DXB*	56,000	38,500	15.0	12.5	1,540	5622694	
	CAPT4961*4A*+EEP			56,500	39,000	14.5	12.0	1,500	5520774
	CAPT4961*4A*+MBVC2000**-1A*			57,000	39,000	16.0	13.0	1,590	5527439
	CHPF4860D6D*+MBVC2000**-1A*+TXV			57,000	39,000	16.0	13.0	1,500	3835281
	CHPF4860D6D*+TXV	A*VC81005C*B*		56,000	38,500	15.5	12.5	1,600	5039277
	CHPF4860D6D*+TXV	GME950805CXA*		56,500	39,000	15.0	12.5	1,575	4701125
	CHPF4860D6D*+TXV	GME951005DXA*		56,000	38,500	15.0	12.5	1,575	4703725
	CHPF4860D6D*+TXV	G*VC950905CXB*		56,500	39,000	15.0	12.5	1,575	5622675
	CHPF4860D6D*+TXV	A*VM960805DXB*		56,500	39,000	15.5	12.7	1,575	5622712
	CHPF4860D6D*+TXV	G*VC951155DXB*		56,500	39,000	15.0	12.5	1,575	5622697
	CHPF4860D6D*+TXV	A*VM961005DXB*		56,500	39,000	15.0	12.5	1,575	5622720
	CHPF4860D6D*+TXV	G*VM961005DXB*		56,500	39,000	15.0	12.5	1,575	5622721
	CHPF4860D6D*+TXV	G*VC80805C*B*		56,000	38,500	15.5	12.5	1,510	5038931
	CHPF4860D6D*+TXV	A*VC80805C*B*		56,000	38,500	15.5	12.5	1,510	5039218
	CHPF4860D6D*+TXV	G*VC81005C*B*		56,000	38,500	15.5	12.5	1,600	5039009
	CHPF4860D6D*+TXV	G*E80805C*B*		54,500	37,400	15.0	12.5	1,500	5379182
	CHPF4860D6D*+TXV	G*VC950905DXB*		56,500	39,000	15.5	12.7	1,575	5622683
	CHPF4860D6D*+TXV	A*VM961155DXB*		56,500	39,000	15.0	12.5	1,575	5622728
	CHPF4860D6D*+TXV	A*VC950905CXB*		56,500	39,000	15.0	12.5	1,575	5622674
	CHPF4860D6D*+TXV	G*VM960805CXB*		56,500	39,000	15.0	12.5	1,575	5622705
	CHPF4860D6D*+TXV	A*VC950905DXB*		56,500	39,000	15.5	12.7	1,575	5622682
	CHPF4860D6D*+TXV	A*VC951155DXB*		56,500	39,000	15.0	12.5	1,575	5622696
CHPF4860D6D*+TXV	G*VM960805DXB*		56,500	39,000	15.5	12.7	1,575	5622713	
CHPF4860D6D*+TXV	G*VM961155DXB*		56,500	39,000	15.0	12.5	1,575	5622729	
CHPF4860D6D*+TXV	G*E81005C*B*		54,500	37,400	14.5	12.0	1,500	5379179	
CHPF4860D6D*+TXV	A*VM960805CXB*		56,500	39,000	15.0	12.5	1,575	5622704	
CSCF4860N6D*+TXV	G*E80805C*B*		54,500	37,400	15.0	12.5	1,500	5379184	
CSCF4860N6D*+TXV	G*E81005C*B*		54,500	37,400	15.0	12.5	1,500	5379183	

<sup>1</sup> BTU/h


<sup>2</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>3</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

# WIRING DIAGRAM — SSX160241\*\* - 481\*\*

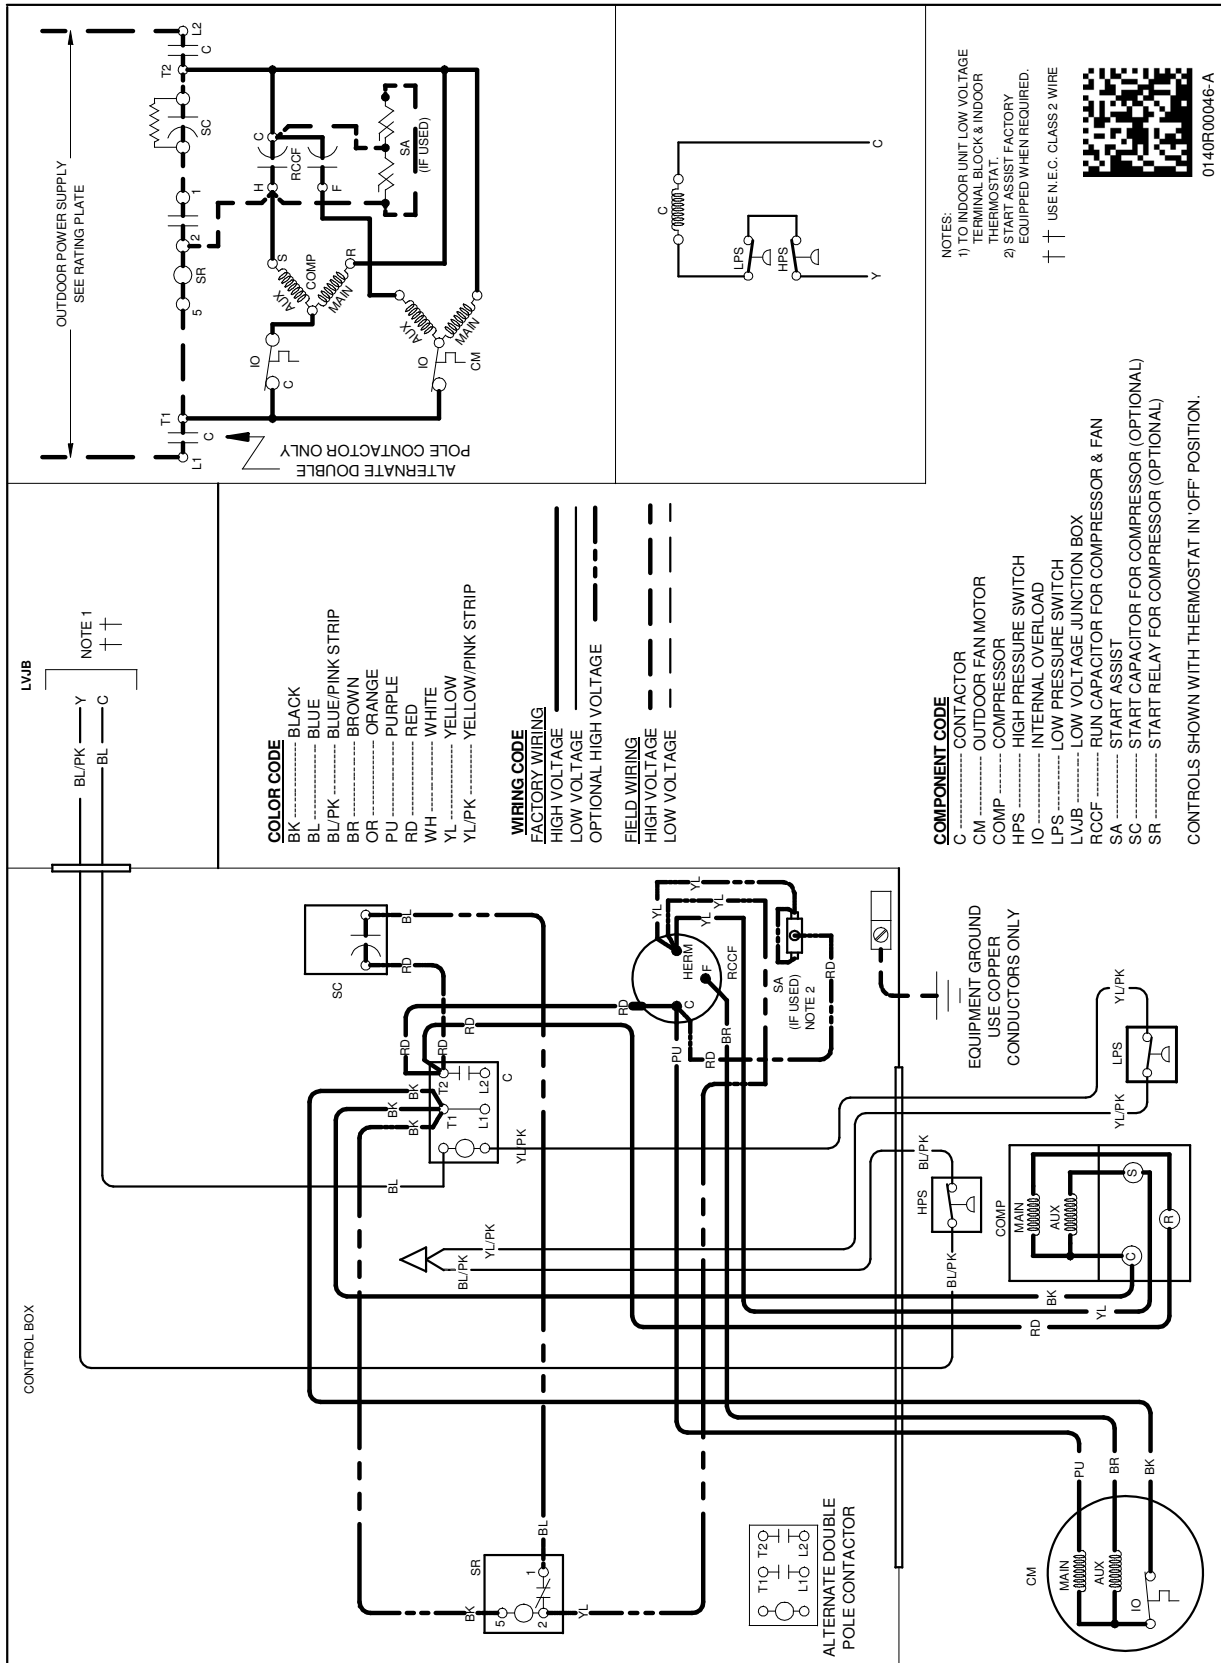


**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



**WARNING**

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.


WIRING DIAGRAM — SSX160591\*\*

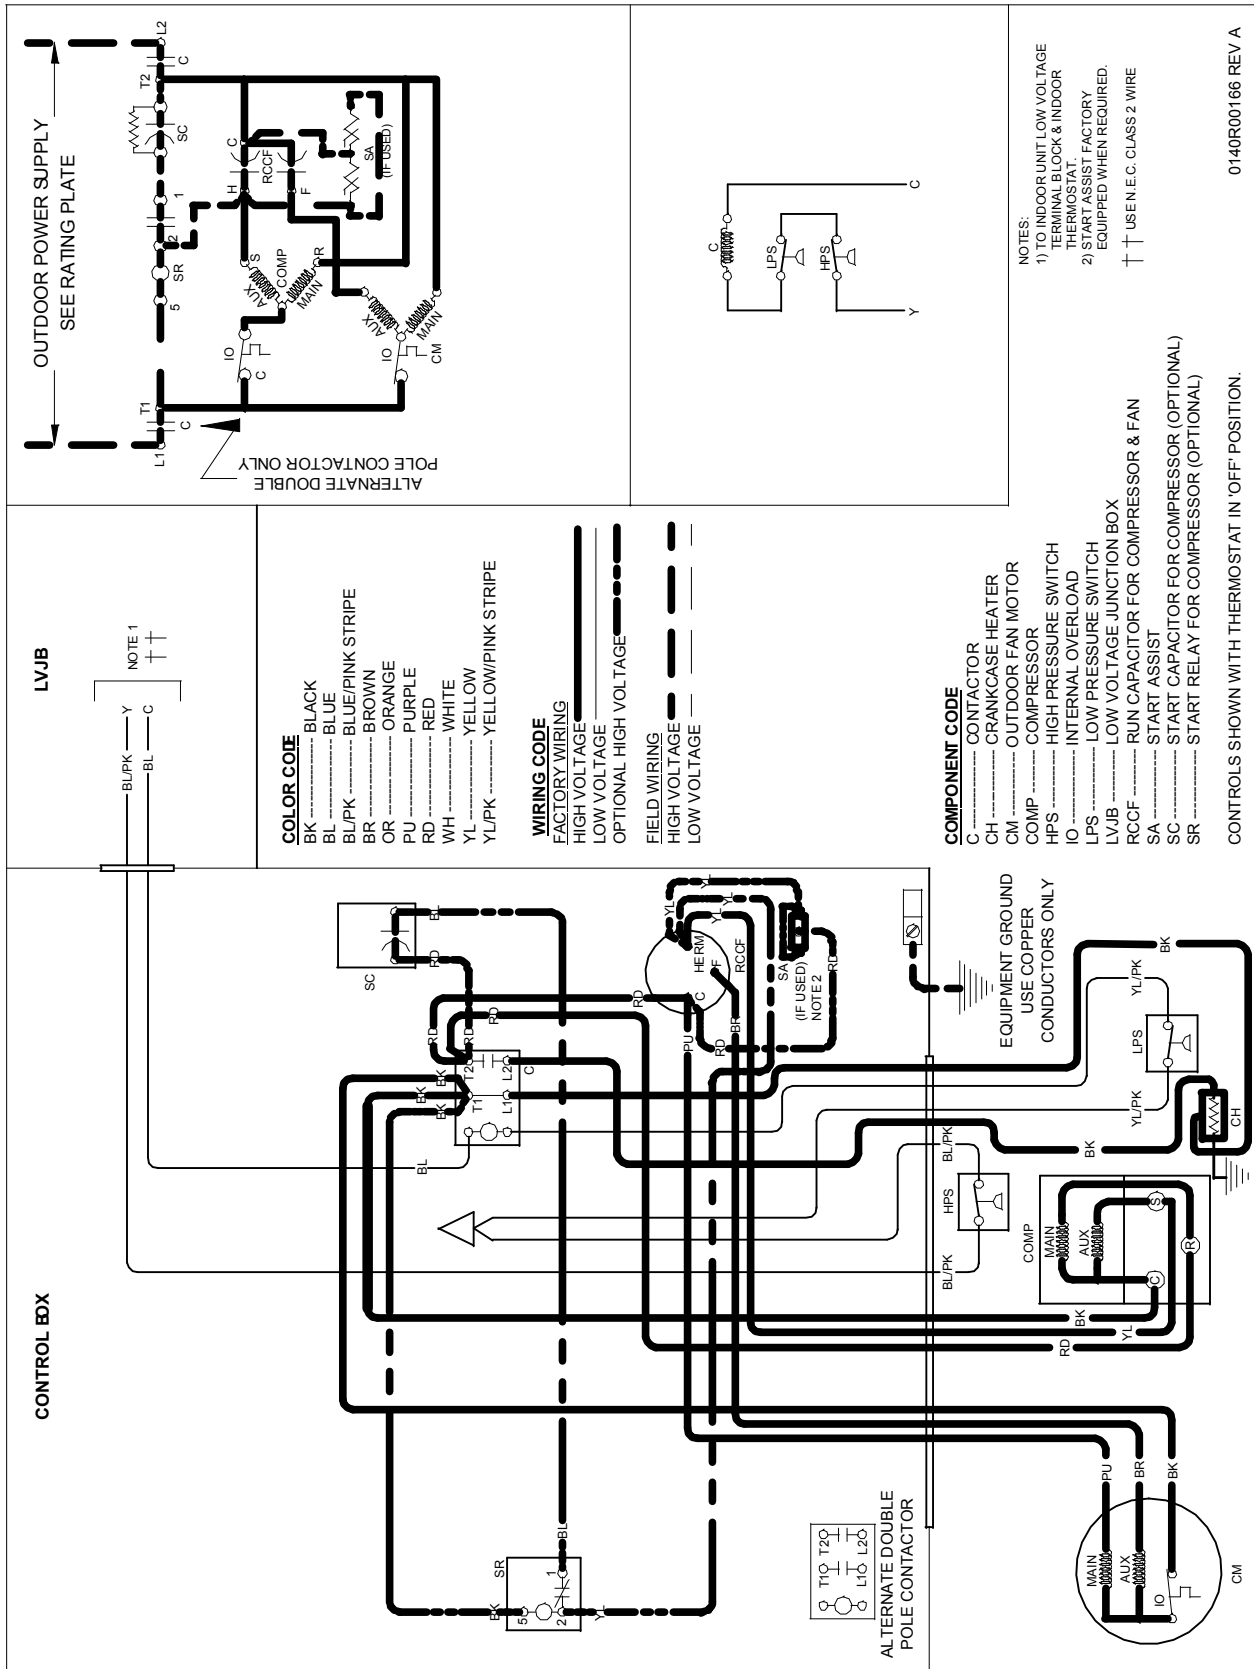

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

**DIMENSIONS**

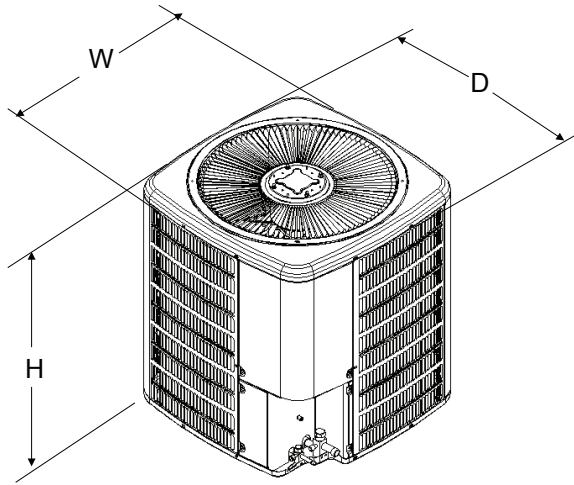

MODEL	DIMENSIONS		
	W"	D"	H"
SSX160241A*	29	29	38¼
SSX160241B*	29	29	32¼
SSX160301A*	29	29	32¼
SSX160361A*	29	29	38¼
SSX160361B*	29	29	32¼
SSX160421A*	29	29	36¼
SSX160481A*	35½	35½	38¼
SSX160481B*	35½	35½	36¼
SSX160591A*	35½	35½	38¼
SSX160601A*	35½	35½	38¼
SSX160601B*	35½	35½	38¼

**ACCESSORIES**

MODEL	DESCRIPTION	SSX16 024*	SSX16 030*	SSX16 036*	SSX16 042*	SSX16 048*	SSX16 059*	SSX16 060*
0163R00003	Crankcase Heater						X	
ABK-20	Anchor Bracket Kit ^	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X						
TX2N4A <sup>2</sup>	TXV Kit	X						
TX3N4 <sup>2</sup>	TXV Kit		X	X				
TX5N4 <sup>2</sup>	TXV Kit				X	X	X	X

^ Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>