



ELECTRIC KEY BOX

Model 95041

ASSEMBLY & OPERATING INSTRUCTIONS



Due to continuing improvement, actual product may differ slightly from the product described herein.

Note: Harbor Freight Tools is not responsible for the loss of any property stored within this safe due to theft, fire, or any other circumstance.



3491 Mission Oaks Blvd., Camarillo, CA 93011
Visit our Web Site at www.harborfreight.com

Copyright© 2006 by Harbor Freight Tools®. All rights reserved. No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools.

For technical questions and replacement parts please call 1-800-444-3353.

THANK YOU for choosing a **HARBOR FREIGHT TOOLS** product. For future reference, please complete the owner's record below:

Model _____ **Serial No.** _____ **Purchase Date** _____

SAVE THE RECEIPT, WARRANTY AND THESE INSTRUCTIONS. It is important that you read the entire manual to become familiar with the unit BEFORE you begin assembly.

Technical Specifications

Overall Dimensions: 12-1/4" L X 12-1/2" H x 4-3/4" D

Materials: 9 Gauge steel door thickness

Batteries: (4) "AA" batteries (included)

Internal Dimensions: 3-7/8" D X 12-3/8" H X 12" W

Also includes: 5 different color coded key labels, 4 adjustable steel hook hanger brackets, 2 steel wall anchors, Manual Key override

Safe location: Can be mounted to a flat surface or wall



READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT!

Safety Warnings and Precautions

WARNING: When using product, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment.

Read all instructions before using this product!

1. **Keep work area clean.** Cluttered areas invite injuries.
2. **Check for damaged parts.** Before using any product, any part that appears damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for any broken or damaged parts and any other conditions that may affect its operation. Replace or repair damaged or worn parts immediately.
3. **Replacement parts and accessories.** When servicing, use only identical replacement parts. Use of any other parts will void the warranty.
4. **Keep children away.** Do not allow children to play with the Key Box, codes or key.
5. **Maintain product with care.** Keep the Key Box in a dry location. Do not expose to rain. Do not use electrically powered Key Boxes in the presence of flammable gases or liquids.
6. **Use the right Key Box for the situation.** There are certain applications for which this Key Box was designed. Do not modify this product and do not use this product for a purpose for which it was not intended.
7. **Do not use the Key Box if under the influence of alcohol or drugs.** Read warning labels on prescriptions to determine if your judgement or reflexes are impaired while taking drugs. If there is any doubt, do not use the Key Box.

NOTE: Harbor Freight Tools is not responsible for the loss of any property stored within this safe due to theft, fire, or any other circumstance.

WARNING: The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

Unpacking

When unpacking your Key Box, check to make sure that all parts listed in the parts list on page 5 are included. If any parts are missing or broken, please call **HARBOR FREIGHT TOOLS** at **1-800-444-3353**. It is important that you read the entire manual to become familiar with the product BEFORE you operate and use the Key Box.

Operation

Your Key Box comes completely assembled. It is important that you read the entire manual to become familiar with the product BEFORE you set up and use the Key Box.

1. **Opening the Key Box for the first time:** On the Keypad (7) enter the factory preset Personal Identification Number (PIN) which is **159B**. When the Green LED light goes on, turn the Knob (4) clockwise and the Key Box will open-see Assembly Diagram.
2. **To program your own PIN:** On the Keypad (7) enter the factory preset PIN which is **159B**. When the Green LED Light goes on, turn the Knob (4) clockwise and the Key Box will open-see Assembly Diagram. Press the Red Button (11) on the inside of the door near the hinges. Select a new PIN, with 3 to 8 numbers, and press the "B" key.

The green light will go on to indicate that the PIN has been successfully programmed. Make a note of the new PIN and store it in a safe place away from the Key Box.

Test your new PIN before closing the door. Make certain you have a Manual Override Key(8) available when setting a new PIN or changing batteries in case the door doesn't open.

Note: The Knob (4) on the Door must be turned within 5 seconds of the green light coming on, or else the PIN must be re-entered.

Note: If you or an intruder incorrectly enter the PIN, the yellow light will go on. Entering an incorrect PIN three times will freeze the system for 20 seconds.

3. **Using the Manual Override Key (8) :** The Manual Override Keys can be used if you forget your PIN, if the batteries are not installed in the Key Box, or if the batteries are dead. **NEVER lock your Manual Override Keys (8) into the Key Box**, store them separately in a safe place.
4. At the center of the Key Box door (see Assembly diagram) is the Key Cover (5). Remove the Cover (5) and pull the panel outward to expose the key hole. Insert the Manual Override Key (8) and turn counterclockwise. Turn the Knob and pull the door open.

5. **To close and lock the Key Box:** Close the door and turn the Knob in the opposite direction used to open the Key Box. Pull the door gently to make certain it is properly locked.
6. **Installing batteries:** The red LED light on the Keypad (7) will light up when the batteries need replacing. When this light appears, IMMEDIATELY replace the batteries.

Open the Safe door. Unsnap the Battery Cover (10) from the Door. Remove the old batteries and install four new "AA" batteries in their place in the battery compartment. Make certain to align the polarity of the batteries as indicated in the battery compartment. Snap in the Battery Cover (10).
7. After replacing the batteries, the PIN may need to be reset. To reset PIN, follow instructions in Step 2 on page 3.
8. **Mounting the Key Box:** To mount the Key Box to a wall or surface, use a drill to set the path for each Bolt (9). **Make certain that the drilling path is clear and free of obstacles such as wires, cables and electrical lines.** Use wall anchors (not included) as necessary. Insert the Bolts (9) (included) through each drilled hole and into a stud to secure the Key Box to the desired surface.
9. The Key Box comes with four Steel Hook Hanger Brackets (13). These come in four colors to match the Plastic Key Hanger Rings which also come in (4) colors.
10. Install the Steel Hook Hanger Brackets (13) either onto the slots on the inside of the Key Box, the Door or both. The four Steel Hook Hanger Brackets are numbered 1 through 20. Once the Steel Hook Brackets are installed, the Plastic Key Rings (12) can be hung on them. The Plastic Key Rings can be set to correspond to either the number or color of the Steel Hook Hanger Brackets (13).

Maintenance

1. Protect the Key Box from moist or wet conditions. Moisture may cause electronic damage in the keypad or corrosion of the steel.
2. Occasionally wipe the Key Box and keypad clean with a soft dry cloth or brush.
3. Occasionally apply a small amount of light oil or lock lubricant to the mechanical lock mechanism. Be careful not to get any oil or other liquids on or near the electronic mechanism.

PLEASE READ THE FOLLOWING CAREFULLY


THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER NOR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Parts List

Part	Description	Quantity
1	Body	1
2	Door	1
3	Front Cover	1
4	Knob	1
5	Key Cover	1
6	LED Light (Green, Yellow, Red)	3
7	Keypad	1
8	Manual Override Key	2
9	Bolt	2
10	Battery Cover	1
11	Red Button	1
12	Plastic Key Ring	20
13	Steel Hook Hanger Brackets	4
14	Steel Wall Anchors	2

Note: Some parts are listed and shown for illustration purposes only and are not available individually as replacement parts.

Parts/Assembly Diagram

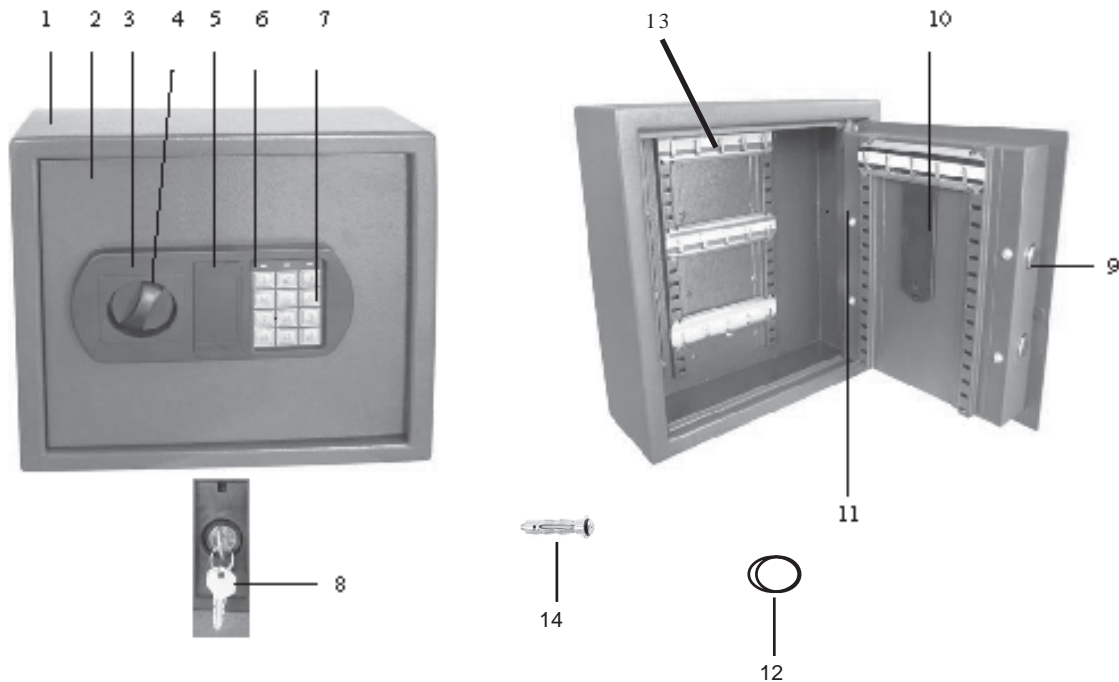

14 Not shown

SKU 95041

For technical questions please call 1-800-444-3353.

Page 5

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>