

General Description

The supercardioid e 906 instrument microphone was especially designed for guitar amplifiers, but it is also an excellent choice for percussion and brass instruments.





Technical Data

Transducer principle.....	dynamic
Pick-up pattern	supercardioid
Frequency response	40 – 18,000 Hz
Sensitivity (free field, no load, 1 kHz).....	2,2 mV/Pa
Nominal impedance	350 Ω
Min. terminating impedance	1 kΩ
Dimensions	∅ 55 x 34 x 134 mm (∅ 2.17" x 1.34" x 5.28")
Weight	140 g (4.94 oz)

Features

- Lively, full sound
- Very fast attack
- Flat shape of microphone body perfect for guitar amps
- Three adjustable sound characteristics (bright, normal, smooth)
- Hum compensating coil
- Rugged metal body
- Delivery includes: 1 e 905 microphone
MZQ 100 clamp
pouch
Instructions for use

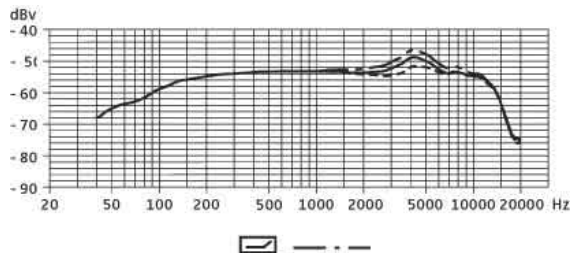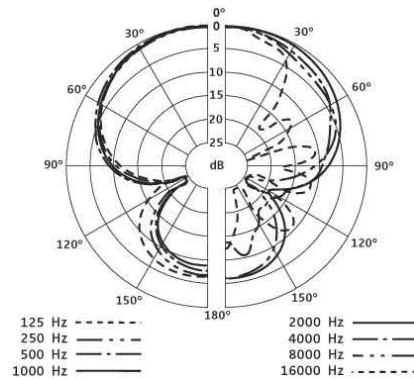

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>