


HOUSING

Dimensions	Length	Width	Height	Cutout
Standard Housing	15-3/8"	13-13/32"	6-13/16"	8-1/8"
Emergency	20-1/2"	20"	6-13/16"	
Chicago Plenum	15-3/8"	13-13/32"	6-13/16"	

7" Horizontal Lamp

1-18, 1-26 DTT
2-13, 2-18, 2-26 DTT

Wide beam distribution for general lighting from two horizontally mounted compact fluorescent lamps. Accommodates various reflector types.

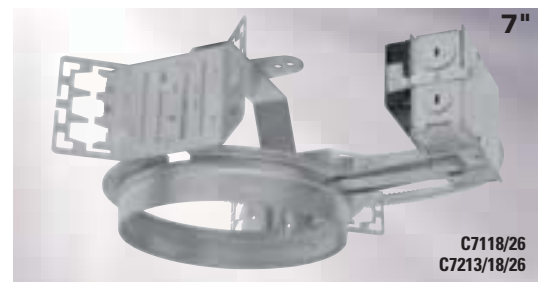

C7118/26
C7213/18/26

HOUSING

- C7118=(1) 18W DTT Lamp
- C7126=(1) 26W DTT Lamp
- C7213=(2) 13W DTT Lamp
- C7218=(2) 18W DTT Lamp
- C7226=(2) 26W DTT Lamp

*Not available for C7213 (13W)

BALLAST

- E=120V - 277V 50/60 Hz Electronic
- 3E=347V 50/60 Hz Electronic
- 1D=120V Dimming, Lutron® Compact SE*
- 2D=120V Dimming, Lutron® Compact SE*

OPTIONS


- CP=Chicago Plenum
- 2C=(2) Ballasts for Hi-Low Switching
- 2CMS=2 Circuit Master Satellite (2 housings, order 2 trims)
- EM =Emergency module with remote test switch
- IEM=Emergency module with integral test switch

ACCESSORIES

- HB26=C Channel Bar Hanger, 26" Long, Pair
- HB50=C Channel Bar Hanger, 50" Long, Pair
- RMB22=Wood Joist Bar Hanger, 22" Long, Pair
- HA7=Slope Adapter for 7" Aperture Housings, Specify Slope (not recommended for wall wash)
- TRM7= Metal Trim Ring, Specify Finish*
- TRR7=Rimless Trim Ring, White*
- FK5=Field Installed Fuse Kit, 5 Amp
- DT7=DecoTrims™*

*Not compatible with Self Flange

TRIM



TRIM

- 7251=Self Flanged
- 7250=Molded Trim Ring, White
- 7251E=Self Flanged, use with IEM option
- 7250E=Molded Trim Ring, White, use with IEM option

FINISH


- LI=Low Iridescent Clear
- H=Haze
- WMH=Warm Haze
- G=Gold
- WH=Wheat
- W=Gloss White
- GP=Graphite
- GPH=Graphite Haze
- K=Cognac
- KH=Cognac Haze

- BB=Black Baffle (7250 only)
- WB=White Baffle (7250 only)

OPTIONS

- WF=White Painted Flange (Self Flanged only)

Open Downlight



TRIM

- 7211=Single Wall Wash, Self Flanged
- 7210=Single Wall Wash, Molded Trim Ring, White
- 7221=Double Wall Wash, Self Flanged
- 7220=Double Wall Wash, Molded Trim Ring, White

FINISH

- LI=Low Iridescent Clear
- H=Haze
- G=Gold
- WH=Wheat
- WMH=Warm Haze
- W=Gloss White


- GP=Graphite
- GPH=Graphite Haze
- K=Cognac
- KH=Cognac Haze

OPTIONS

- WF=White Painted Flange (Self Flanged only)

Open Wall Wash

GRUVI

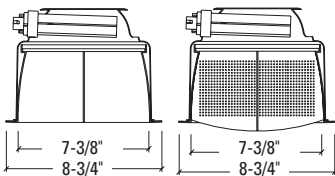

TRIM

- 7281=Self Flanged
- 7281E=Self Flanged, use with IEM option

FINISH

- LI=Low Iridescent Clear
- W=Gloss White


LOUVER

- 5=Blade (LI or W Matching Blade Finish)
- 6=Perforated Blade (Lt Grey Blades, W Finish only)

OPTIONS

- WF=White Painted Flange (Self Flanged only)

Cross Blade Downlight



TRIM

- 7281=Self Flanged
- 7280=Molded Trim Ring, White

FINISH

- LI=Low Iridescent Clear
- H=Haze
- G=Gold
- WH=Wheat
- WMH=Warm Haze
- W=Gloss White
- GP=Graphite
- GPH=Graphite Haze
- K=Cognac
- KH=Cognac Haze
- BB=Black Baffle (7280 only)
- WB=White Baffle (7280 only)

LENS

- 1=Prismatic Acrylic
- 2=Diffuse Acrylic
- 3=Clear Polycarbonate
- 1G=Prismatic Glass
- 2G=Diffuse Glass
- 3G=Clear Glass
- 4G=Fresnel Glass

OPTIONS

- WF=White Painted Flange (Self Flanged only)



Lens Downlight



Ordering Example	Housing	Trim	Accessories
Housing, Trim, Accessories and Lamps ordered as separate line items.	C7218E	7250LI	HB26

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>